

Modular Telephone Jack



RoHS
Compliant



Description:

Modular Telephone Jacks are a complete line of PCB and wire leaded jacks which are UL and CSA approved and meet all required FCC rules and regulations.

Specification:

Material:

Standard Insulator	: PBT, or ABS
Optional Hi-Temp Insulator	: Nylon 6T
Insulator Colours	: Black or medium gray
Contacts	: Phosphor Bronze
Shield	: Phosphor Bronze, tin plated

Contact Plating:

Flat contacts	: Gold Flash over Nickel under plate on contact area, Tin over Copper under plate on solder tails.
Round contacts	: Gold flash over Nickel under plate overall

Electrical:


Operating voltage	: 150V AC max.
Current rating	: 1.5 Amps max.
Contact resistance	: 20mΩ max. initial
Insulation resistance	: 500MΩ min.
Dielectric withstanding voltage	: 1000V AC for 1 minute

Mechanical:

Insertion force	: 6 contacts: 20.6N
Durability	: 500 Cycles

Temperature Rating:

Operating Temperature	: -40°C to +70°C
Soldering process temperature	: Standard insulator: 235°C & Hi-Temp insulator: 260C

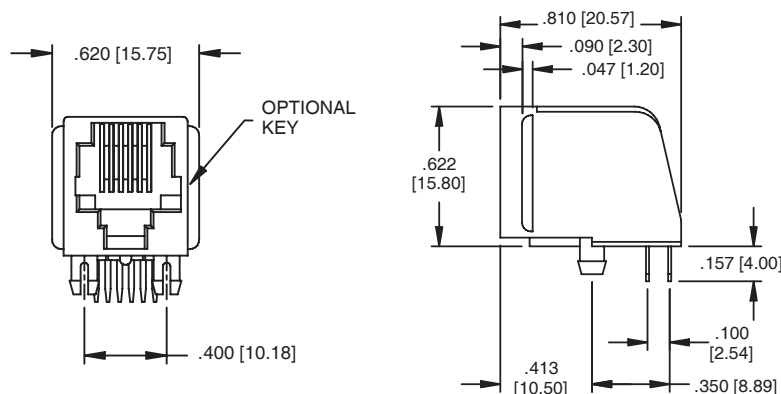


Dimensions : Inches (Millimeters)

www.element14.com
www.farnell.com
www.newark.com



Modular Telephone Jack

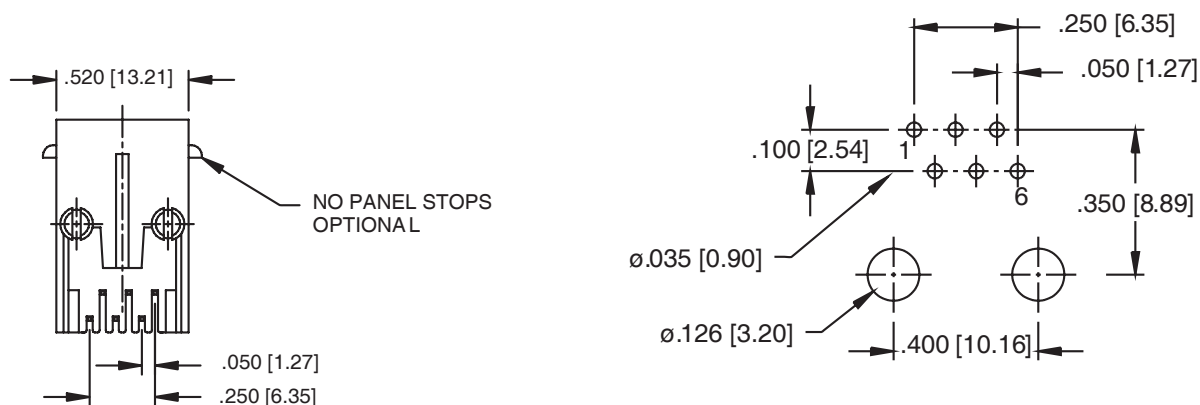

Recommended PCB Layout

Dimensions : Inches (Millimeters)

Part Number Table

Description	Part Number
CAT5/CAT5E RJ25 Modular Jack 6POS 1 Port	MTJ-661X1

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

