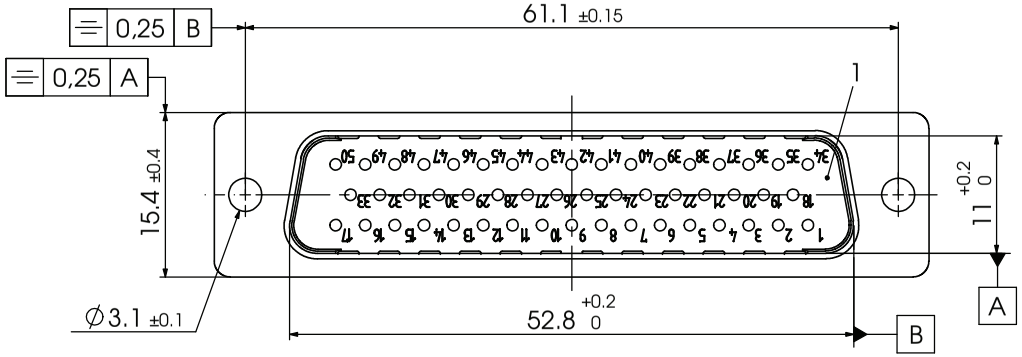



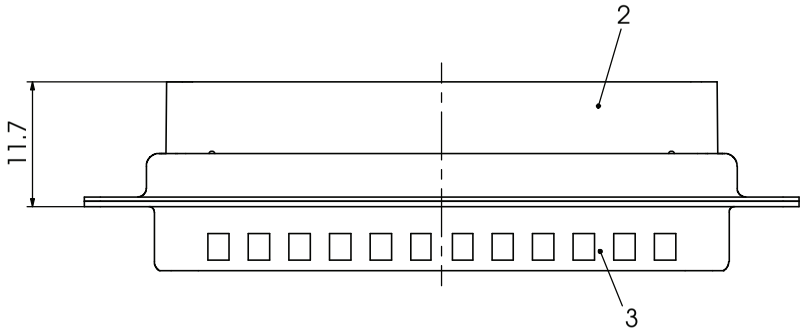

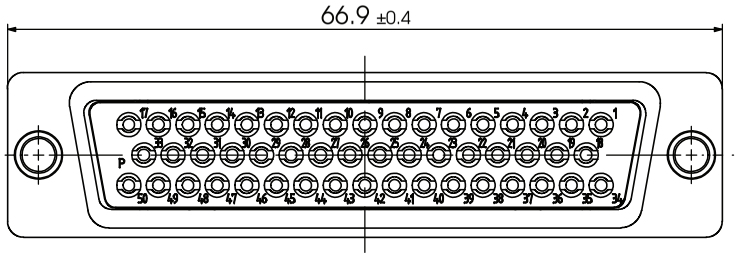

y for series FL or FU

Technical data for modification (FU)
Crimp contacts FK20P (AWG 20-24/1,3µm Au) included in delivery.

	3	1	Shell	Steel	tin plated
③	2	1	Insulator rear part	PEI (-55°C - +130°C)	green
	1	1	Insulator front part	PBT	green
	No.	*St.*	*Part*	*Type Description/Material*	*Surface plating/Colour/Class*

Technical data for modification (FL)
② Crimp contacts not supplied with connector. Contacts must be ordered separately.

	3	1	Shell	Steel	tin plated
	2	1	Insulator rear part	PA66 (-55°C - +115°C)	black
	1	1	Insulator front part	PBT	black
	No.	*St.*	*Part*	*Type Description/Material*	*Surface plating/Colour/Class*

			Measurement without tolerance acc. to ISO 2768-m	SCALE 2:1	TITLE	D-Sub Crimp Connector
			NAME / DATE			
			DRAWN	Denzinger 26-11-2003		
			CHECKED	ffloßmann 12-06-2007		
3	10-05-2007	22021	FCT group fctgroup.com		DWG.NO.	Fy50P7-K120
2	24-02-2006	21782				REV. 3
1						
REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE		REPLACEMENT FOR: Fy50P7-K120 a	PAGES 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.