

## Device connector, front mounting - SH-8EPS48AAC00S - 1621562

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Device connector for front wall, angled rotatable, SPEEDCON locking, M23, Number of positions: 8+4+PE, Type of contact: Male connector, Crimp connection, Axial O-ring, 4xØ3,2, Flange dimensions: 28 mm x 28 mm

The figure shows the product version with CAT5 interface



### Key commercial data

Packing unit	1
GTIN	 4 046356 937108
Custom tariff number	85366990

### Technical data

#### General

Mounting type	4xØ3,2
---------------	--------

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440209


#### ETIM

ETIM 4.0	EC002635
ETIM 5.0	EC002635

### Drawings


## Device connector, front mounting - SH-8EPS48AAC00S - 1621562

Schematic diagram



Pin assignment of pin, signal

Dimensioned drawing

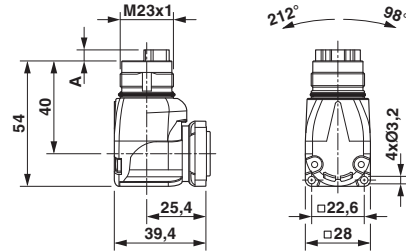

Pin version: dimension A = 4.7 mm, socket version: dimension A = 0 mm