

## DS25CP104A / DS25CP114 3.125 Gbps 4x4 LVDS Crosspoint Switch with Transmit Pre-Emphasis and Receive Equalization

Check for Samples: [DS25CP104A](#), [DS25CP114](#)

### FEATURES

- **DC - 3.125 Gbps Low Jitter, Low Skew, Low Power Operation**
- **Pin and SMBus Configurable, Fully Differential, Non-Blocking Architecture**
- **Pin (Two Levels) and SMBus (Four Levels) Selectable Pre-Emphasis and Equalization Eliminate ISI Jitter**
- **Wide Input Common Mode Range Enables Easy Interface to CML and LVPECL Drivers**
- **LOS Circuitry Detects Open Inputs Fault Condition**
- **On-Chip 100Ω Input and Output Termination Minimizes Insertion and Return Losses, Reduces Component Count, Minimizes Board Space The DS25CP114 Eliminates the On-Chip Input Termination for Added Design Flexibility.**
- **8 kV ESD on LVDS I/O Pins Protects Adjoining Components**
- **Small 6 mm x 6 mm WQFN-40 Space Saving Package**

### APPLICATIONS

- **SD/HD/3G HD SDI Routers**
- **OC-48 / STM-16**
- **InfiniBand and FireWire**

### DESCRIPTION

The DS25CP104A and DS25CP114 are 3.125 Gbps 4x4 LVDS crosspoint switches optimized for high-speed signal routing and switching over lossy FR-4 printed circuit board backplanes and balanced cables. Fully differential signal paths ensure exceptional signal integrity and noise immunity. The non-blocking architecture allows connections of any input to any output or outputs. The switch configuration can be accomplished via external pins or the System Management Bus (SMBus) interface.

The DS25CP104A and DS25CP114 feature four levels (Off, Low, Medium, High) of transmit pre-emphasis (PE) and four levels (Off, Low, Medium, High) of receive equalization (EQ) settable via the SMBus interface. Off and Medium PE levels and Off and Low EQ levels are settable with the external pins. In addition, the SMBus circuitry enables the loss of signal (LOS) monitors that can inform a system of the presence of an open inputs condition (e.g. disconnected cable).

Wide input common mode range allows the switch to accept signals with LVDS, CML and LVPECL levels; the output levels are LVDS. A very small package footprint requires a minimal space on the board while the flow-through pinout allows easy board layout. On the DS25CP104A each differential input and output is internally terminated with a 100Ω resistor to lower return losses, reduce component count and further minimize board space. For added design flexibility the 100Ω input terminations on the DS25CP114 have been eliminated. This enables a designer to build custom crosspoint configurations and distribution circuits that require a limited multidrop signaling topology.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

Typical Application


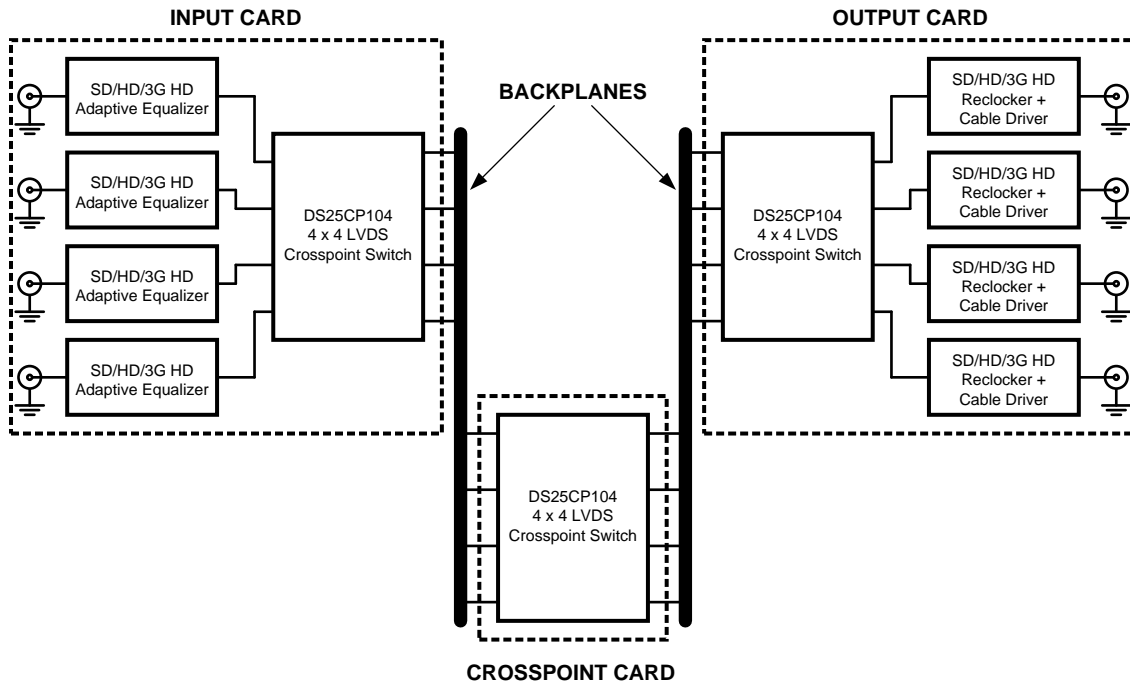



Table 1. Device Information

| Device     | Function              | Termination Option                  | Available Signal Conditioning |
|------------|-----------------------|-------------------------------------|-------------------------------|
| DS25CP104A | 4x4 Crosspoint Switch | Internal 100Ω for LVDS inputs       | 4 Levels: PE and EQ           |
| DS25CP114  | 4x4 Crosspoint Switch | None: Requires external termination | 4 Levels : PE and EQ          |

Block Diagram

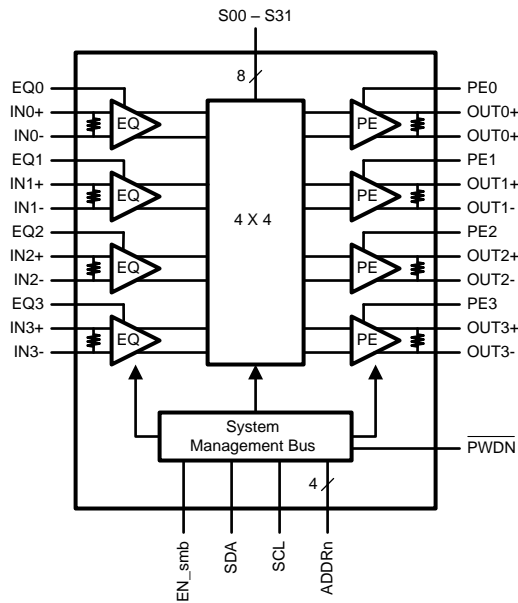


DS25CP104A

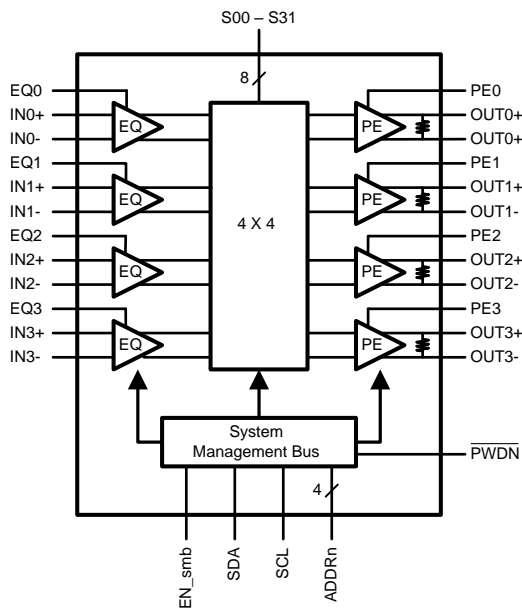

DS25CP114

Connection Diagram

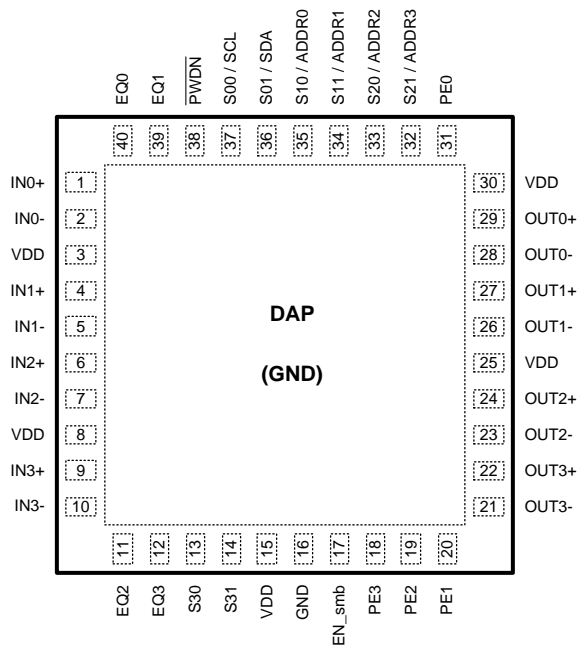

DS25CP104A / DS25CP114 Pin Diagram

**PIN DESCRIPTIONS<sup>(1)</sup>**

| Pin Name  | Pin Number                              | I/O, Type   | Pin Description  |
|---|---|-------------|--|
| IN0+, IN0-,<br>IN1+, IN1-,<br>IN2+, IN2-,<br>IN3+, IN3-         | 1, 2,<br>4, 5,<br>6, 7,<br>9, 10        | I, LVDS     | Inverting and non-inverting high speed LVDS input pins. These 4 input pairs have a 100 Ohm differential input termination on the CP104A device. The CP114 eliminates the input termination for added design flexibility.   |
| OUT0+, OUT0-,<br>OUT1+, OUT1-,<br>OUT2+, OUT2-,<br>OUT3+, OUT3- | 29, 28,<br>27, 26,<br>24, 23,<br>22, 21 | O, LVDS     | Inverting and non-inverting high speed LVDS output pins. Each output pair has an internal 100 Ohm termination to improve device return loss characteristics.   |
| EQ0, EQ1,<br>EQ2, EQ3   | 40, 39,<br>11, 12                       | I, LVCMOS   | Receive equalization level select pins. These pins are functional regardless of the EN_smb pin state.  |
| PE0, PE1,<br>PE2, PE3   | 31, 20,<br>19, 18                       | I, LVCMOS   | Transmit pre-emphasis level select pins. These pins are functional regardless of the EN_smb pin state.   |
| EN_smb  | 17                                      | I, LVCMOS   | System Management Bus (SMBus) enable pin. The pin has an internal pull down. When the pin is set to a [1], the device is in the SMBus mode. All SMBus registers are reset when this pin is toggled. There is a 20k pulldown device on this pin.  |
| S00/SCL   | 37                                      | I, LVCMOS   | For EN_smb = [0], these pins select which LVDS input is routed to the OUT0. In the SMBus mode, when the EN_smb = [1], these pins are SMBus clock input and data input pins respectively.   |
| S01/SDA   | 36                                      | I/O, LVCMOS |  |
| S10/ADDR0,<br>S11/ADDR1   | 35,<br>34                               | I, LVCMOS   | For EN_smb = [0], these pins select which LVDS input is routed to the OUT1. In the SMBus mode, when the EN_smb = [1], these pins are the User-Set SMBus Slave Address inputs.  |
| S20/ADDR2,<br>S21/ADDR3   | 33,<br>32                               | I, LVCMOS   | For EN_smb = [0], these pins select which LVDS input is routed to the OUT2. In the SMBus mode, when the EN_smb = H, these pins are the User-Set SMBus Slave Address inputs.  |
| S30, S31  | 13, 14                                  | I, LVCMOS   | For EN_smb = [0], these pins select which LVDS input is routed to the OUT3. In the SMBus mode, when the EN_smb = [1], these pins are non-functional and should be tied to either logic H or L.   |
| $\overline{\text{PWN}}$   | 38                                      | I, LVCMOS   | For EN_smb = [0], this is the power down pin. When the $\overline{\text{PWN}}$ is set to a [0], the device is in the power down mode. The SMBus circuitry can still be accessed provided the EN_smb pin is set to a [1]. In the SMBus mode, the device is powered up by either setting the $\overline{\text{PWN}}$ pin to [1] <b>OR</b> by writing a [1] to the Control Register D[7] bit ( SoftPWN). The device will be powered down by setting the $\overline{\text{PWN}}$ pin to [0] <b>AND</b> by writing a [0] to the Control Register D[7] bit ( SoftPWN). |
| VDD   | 3, 8,<br>15, 25, 30                     | Power       | Power supply pins.   |
| GND   | 16, DAP                                 | Power       | Ground pin and a pad (DAP - die attach pad).   |

(1) Center DAP connection must be made to GND for optimum electrical and thermal performance.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

**Absolute Maximum Ratings<sup>(1)(2)</sup>**

|   |                              |
|---|------------------------------|
| Supply Voltage                                | -0.3V to +4V                 |
| LVC MOS Input Voltage                         | -0.3V to ( $V_{CC} + 0.3V$ ) |
| LVC MOS Output Voltage                        | -0.3V to ( $V_{CC} + 0.3V$ ) |
| LVDS Input Voltage                            | -0.3V to +4V                 |
| Differential Input Voltage  VID  (DS25CP104A) | 1.0V                         |
| LVDS Differential Input Voltage (DS25CP114)   | $V_{CC} + 0.6V$              |
| LVDS Output Voltage                           | -0.3V to ( $V_{CC} + 0.3V$ ) |
| LVDS Differential Output Voltage              | 0V to 1.0V                   |
| LVDS Output Short Circuit Current Duration    | 5 ms                         |
| Junction Temperature                          | +150°C                       |
| Storage Temperature Range                     | -65°C to +150°C              |
| Lead Temperature Range                        |                              |
| Soldering (4 sec.)                            | +260°C                       |
| Maximum Package Power Dissipation at 25°C     |                              |
| RTA0040A Package                              | 4.65W                        |
| Derate RTA0040A Package                       | 37.2 mW/°C above +25°C       |
| Package Thermal Resistance                    |                              |
| $\theta_{JA}$                                 | +26.9°C/W                    |
| $\theta_{JC}$                                 | +3.8°C/W                     |
| ESD Susceptibility                            |                              |
| HBM <sup>(3)</sup>                            | ≥8 kV                        |
| MM <sup>(4)</sup>                             | ≥250V                        |
| CDM <sup>(5)</sup>                            | ≥1250V                       |

- (1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the [Absolute Maximum Ratings](#) or other conditions beyond those indicated in the [Recommended Operating Conditions](#) is not implied. The Recommended Operating Conditions indicate conditions at which the device is functional and the device should not be operated beyond such conditions.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.
- (3) Human Body Model, applicable std. JESD22-A114C
- (4) Machine Model, applicable std. JESD22-A115-A
- (5) Field Induced Charge Device Model, applicable std. JESD22-C101-C

**Recommended Operating Conditions**

|  | Min | Typ | Max | Units |
|--|-----|-----|-----|-------|
| Supply Voltage ( $V_{CC}$ )  | 3.0 | 3.3 | 3.6 | V     |
| Receiver Differential Input Voltage ( $V_{ID}$ ) (DS25CP104A only) | 0   |     | 1   | V     |
| Operating Free Air Temperature ( $T_A$ )                           | -40 | +25 | +85 | °C    |
| SMBus (SDA, SCL)   |     |     | 3.6 | V     |

**DC Electrical Characteristics**

 Over recommended operating supply and temperature ranges unless otherwise specified.<sup>(1)(2)(3)</sup>

| Symbol                           | Parameter                | Conditions | Min | Typ | Max      | Units |
|----------------------------------|--------------------------|------------|-----|-----|----------|-------|
| <b>LVC MOS DC SPECIFICATIONS</b> |                          |            |     |     |          |       |
| $V_{IH}$                         | High Level Input Voltage |            | 2.0 |     | $V_{CC}$ | V     |
| $V_{IL}$                         | Low Level Input Voltage  |            | GND |     | 0.8      | V     |

- (1) The Electrical Characteristics tables list guaranteed specifications under the listed [Recommended Operating Conditions](#) except as otherwise modified or specified by the Electrical Characteristics Conditions and/or Notes. Typical specifications are estimations only and are not guaranteed.
- (2) Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground except  $V_{OD}$  and  $\Delta V_{OD}$ .
- (3) Typical values represent most likely parametric norms for  $V_{CC} = +3.3V$  and  $T_A = +25^\circ C$ , and at the Recommended Operation Conditions at the time of product characterization and are not guaranteed.

## DC Electrical Characteristics (continued)

Over recommended operating supply and temperature ranges unless otherwise specified.<sup>(1)(2)(3)</sup>

| Symbol                               | Parameter   | Conditions  | Min  | Typ     | Max             | Units    |
|--------------------------------------|---|---|------|---------|-----------------|----------|
| $I_{IH}$                             | High Level Input Current  | $V_{IN} = 3.6V$<br>$V_{CC} = 3.6V$                                    |      | 0       | $\pm 10$        | $\mu A$  |
|                                      |   | EN_smb pin  | 40   | 175     | 250             | $\mu A$  |
| $I_{IL}$                             | Low Level Input Current   | $V_{IN} = GND$<br>$V_{CC} = 3.6V$                                     |      | 0       | $\pm 10$        | $\mu A$  |
| $V_{CL}$                             | Input Clamp Voltage   | $I_{CL} = -18 mA$ , $V_{CC} = 0V$                                     |      | -0.9    | -1.5            | V        |
| $V_{OL}$                             | Low Level Output Voltage  | $I_{OL} = 4 mA$ SDA pin   |      |         | 0.4             | V        |
| <b>LVDS INPUT DC SPECIFICATIONS</b>  |   |   |      |         |                 |          |
| $V_{ID}$                             | Input Differential Voltage <sup>(4)</sup>                       |   | 0    |         | 1               | V        |
| $V_{TH}$                             | Differential Input High Threshold                               | $V_{CM} = +0.05V$ or $V_{CC}-0.05V$                                   |      | 0       | +100            | mV       |
| $V_{TL}$                             | Differential Input Low Threshold                                |   | -100 | 0       |                 | mV       |
| $V_{CMR}$                            | Input Common Mode Voltage Range                                 | $V_{ID} = 100 mV$   | 0.05 |         | $V_{CC} - 0.05$ | V        |
| $I_{IN}$                             | Input Current <sup>(5)</sup>                                    | $V_{IN} = +3.6V$ or $0V$<br>$V_{CC} = 3.6V$ or $0V$                   |      | $\pm 1$ | $\pm 10$        | $\mu A$  |
| $C_{IN}$                             | Input Capacitance   | Any LVDS Input Pin to GND   |      | 1.7     |                 | pF       |
| $R_{IN}$                             | Input Termination Resistor <sup>(6)</sup>                       | Between IN+ and IN-   |      | 100     |                 | $\Omega$ |
| <b>LVDS OUTPUT DC SPECIFICATIONS</b> |   |   |      |         |                 |          |
| $V_{OD}$                             | Differential Output Voltage                                     |   | 250  | 350     | 450             | mV       |
| $\Delta V_{OD}$                      | Change in Magnitude of $V_{OD}$ for Complimentary Output States | $R_L = 100\Omega$   | -35  |         | 35              | mV       |
| $V_{OS}$                             | Offset Voltage  |   | 1.05 | 1.2     | 1.375           | V        |
| $\Delta V_{OS}$                      | Change in Magnitude of $V_{OS}$ for Complimentary Output States | $R_L = 100\Omega$   | -35  |         | 35              | mV       |
| $I_{OS}$                             | Output Short Circuit Current <sup>(7)</sup>                     | OUT to GND  |      | -35     | -55             | mA       |
|                                      |   | OUT to $V_{CC}$   |      | 7       | 55              | mA       |
| $C_{OUT}$                            | Output Capacitance  | Any LVDS Output Pin to GND  |      | 1.2     |                 | pF       |
| $R_{OUT}$                            | Output Termination Resistor                                     | Between OUT+ and OUT-   |      | 100     |                 | $\Omega$ |
| <b>SUPPLY CURRENT</b>                |   |   |      |         |                 |          |
| $I_{CC1}$                            | Supply Current  | $\overline{PWDN} = 0$   |      | 40      | 50              | mA       |
| $I_{CC2}$                            | Supply Current  | $\overline{PWDN} = 1$<br>PE = Off, EQ = Off<br>Broadcast (1:4) Mode   |      | 145     | 175             | mA       |
| $I_{CC3}$                            | Supply Current  | $\overline{PWDN} = 1$<br>PE = Off, EQ = Off<br>Quad Buffer (4:4) Mode |      | 157     | 190             | mA       |

(4) Input Differential Voltage ( $V_{ID}$ ) The DS25CP104A limits input amplitude to 1 volt. The DS25CP114 supports any  $V_{ID}$  within the supply voltage to GND range.

(5)  $I_{IN}$  is applied to both pins of the LVDS input pair at the same time.

(6) Input Termination Resistor ( $R_{IN}$ ) The DS25CP104A provides an integrated 100 ohm input termination for each high speed LVDS pair. The DS25CP114 eliminates this internal termination.

(7) Output short circuit current ( $I_{OS}$ ) is specified as magnitude only, minus sign indicates direction only.

## AC Electrical Characteristics

Over recommended operating supply and temperature ranges unless otherwise specified. <sup>(1)(2)</sup>

| Symbol   | Parameter   | Conditions   | Min        | Typ | Max  | Units   |            |
|--|---|--|------------|-----|------|---------|------------|
| <b>LVDS OUTPUT AC SPECIFICATIONS <sup>(3)</sup></b>                                      |   |  |            |     |      |         |            |
| $t_{PLHD}$   | Differential Propagation Delay Low to High                                | $R_L = 100\Omega$  |            | 480 | 650  | ps      |            |
| $t_{PHLD}$   | Differential Propagation Delay High to Low                                |  |            | 460 | 650  | ps      |            |
| $t_{SKD1}$   | Pulse Skew $ t_{PLHD} - t_{PHLD} $ , <sup>(4)</sup>                       |  |            | 20  | 100  | ps      |            |
| $t_{SKD2}$   | Channel to Channel Skew, <sup>(5)</sup>                                   |  |            | 40  | 125  | ps      |            |
| $t_{SKD3}$   | Part to Part Skew, <sup>(6)</sup>   |  |            | 50  | 200  | ps      |            |
| $t_{LHT}$  | Rise Time   | $R_L = 100\Omega$  |            | 80  | 150  | ps      |            |
| $t_{HLT}$  | Fall Time   |  |            | 80  | 150  | ps      |            |
| $t_{ON}$   | Power Up Time   | Time from $\overline{PWDN} = LH$ to $OUT_n$ active                   |            | 6   | 20   | $\mu s$ |            |
| $t_{OFF}$  | Power Down Time   | Time from $\overline{PWDN} = HL$ to $OUT_n$ inactive                 |            | 8   | 25   | ns      |            |
| $t_{SEL}$  | Select Time   | Time from $S_n = LH$ or $HL$ to new signal at $OUT_n$                |            | 8   | 12   | ns      |            |
| <b>JITTER PERFORMANCE WITH EQ = Off, PE = Off <sup>(3)</sup> (Figure 5)</b>              |   |  |            |     |      |         |            |
| $t_{RJ1}$  | Random Jitter (RMS Value)<br>No Test Channels<br><sup>(7)</sup>           | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>Clock (RZ)    | 1.25 GHz   |     | 0.5  | 1.1     | ps         |
| $t_{RJ2}$  |   |  | 1.5625 GHz |     | 0.5  | 1.1     | ps         |
| $t_{DJ1}$  | Deterministic Jitter (Peak to Peak)<br>No Test Channels<br><sup>(8)</sup> | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 10   | 22      | ps         |
| $t_{DJ2}$  |   |  | 3.125 Gbps |     | 10   | 27      | ps         |
| $t_{TJ1}$  | Total Jitter (Peak to Peak)<br>No Test Channels<br><sup>(9)</sup>         | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>PRBS-23 (NRZ) | 2.5 Gbps   |     | 0.07 | 0.11    | $UI_{P-P}$ |
| $t_{TJ2}$  |   |  | 3.125 Gbps |     | 0.13 | 0.16    | $UI_{P-P}$ |
| <b>JITTER PERFORMANCE WITH EQ = Off, PE = Low <sup>(3)</sup> (Figure 6, Figure 9)</b>    |   |  |            |     |      |         |            |
| $t_{RJ1A}$   | Random Jitter (RMS Value)<br>Test Channels A<br><sup>(7)</sup>            | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>Clock (RZ)    | 1.25 GHz   |     | 0.5  | 1.1     | ps         |
| $t_{RJ2A}$   |   |  | 1.5625 GHz |     | 0.5  | 1.1     | ps         |
| $t_{DJ1A}$   | Deterministic Jitter (Peak to Peak)<br>Test Channels A<br><sup>(8)</sup>  | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 10   | 22      | ps         |
| $t_{DJ2A}$   |   |  | 3.125 Gbps |     | 10   | 27      | ps         |
| <b>JITTER PERFORMANCE WITH EQ = Off, PE = Medium <sup>(3)</sup> (Figure 6, Figure 9)</b> |   |  |            |     |      |         |            |
| $t_{RJ1B}$   | Random Jitter (RMS Value)<br>Test Channels B<br><sup>(7)</sup>            | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>Clock (RZ)    | 1.25 GHz   |     | 0.5  | 1.1     | ps         |
| $t_{RJ2B}$   |   |  | 1.5625 GHz |     | 0.5  | 1.1     | ps         |
| $t_{DJ1B}$   | Deterministic Jitter (Peak to Peak)<br>Test Channels B<br><sup>(8)</sup>  | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 12   | 30      | ps         |
| $t_{DJ2B}$   |   |  | 3.125 Gbps |     | 12   | 30      | ps         |
| $t_{TJ1B}$   | Total Jitter (Peak to Peak)<br>Test Channels B<br><sup>(9)</sup>          | $V_{ID} = 350\text{ mV}$<br>$V_{CM} = 1.2\text{ V}$<br>PRBS-23 (NRZ) | 2.5 Gbps   |     | 0.08 | 0.10    | $UI_{P-P}$ |
| $t_{TJ2B}$   |   |  | 3.125 Gbps |     | 0.10 | 0.15    | $UI_{P-P}$ |

- (1) The Electrical Characteristics tables list guaranteed specifications under the listed [Recommended Operating Conditions](#) except as otherwise modified or specified by the Electrical Characteristics Conditions and/or Notes. Typical specifications are estimations only and are not guaranteed.
- (2) Typical values represent most likely parametric norms for  $V_{CC} = +3.3\text{ V}$  and  $T_A = +25^\circ\text{ C}$ , and at the [Recommended Operating Conditions](#) at the time of product characterization and are not guaranteed.
- (3) Specification is guaranteed by characterization and is not tested in production.
- (4)  $t_{SKD1}$ ,  $|t_{PLHD} - t_{PHLD}|$ , Pulse Skew, is the magnitude difference in differential propagation delay time between the positive going edge and the negative going edge of the same channel.
- (5)  $t_{SKD2}$ , Channel to Channel Skew, is the difference in propagation delay ( $t_{PLHD}$  or  $t_{PHLD}$ ) among all output channels in Broadcast mode (any one input to all outputs).
- (6)  $t_{SKD3}$ , Part to Part Skew, is defined as the difference between the same signal path of any two devices running at the same  $V_{CC}$  and within  $5^\circ\text{ C}$  of each other within the operating temperature range.
- (7) Measured on a clock edge with a histogram and an accumulation of 1500 histogram hits. Input stimulus jitter is subtracted geometrically.
- (8) Tested with a combination of the 110000101 (K28.5+ character) and 0011111010 (K28.5- character) patterns. Input stimulus jitter is subtracted algebraically.
- (9) Measured on an eye diagram with a histogram and an accumulation of 3500 histogram hits. Input stimulus jitter is subtracted.

## AC Electrical Characteristics (continued)

Over recommended operating supply and temperature ranges unless otherwise specified.<sup>(1)(2)</sup>

| Symbol   | Parameter  | Conditions  | Min        | Typ | Max  | Units |                   |
|--|--|---|------------|-----|------|-------|-------------------|
| <b>JITTER PERFORMANCE WITH EQ = Off, PE = High<sup>(3)</sup> (Figure 6, Figure 9)</b>    |  |   |            |     |      |       |                   |
| t <sub>RJ1C</sub>  | Random Jitter (RMS Value)<br>Test Channels C<br>(7)  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>Clock (RZ)    | 1.25 GHz   | 0.5 | 1.1  | ps    |                   |
| t <sub>RJ2C</sub>  |  |   | 1.5625 GHz | 0.5 | 1.1  | ps    |                   |
| t <sub>DJ1C</sub>  | Deterministic Jitter (Peak to Peak)<br>Test Channels C<br>(8)                                  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>K28.5 (NRZ)   | 2.5 Gbps   | 30  | 60   | ps    |                   |
| t <sub>DJ2C</sub>  |  |   | 3.125 Gbps | 30  | 65   | ps    |                   |
| <b>JITTER PERFORMANCE WITH PE = Off, EQ = Low<sup>(3)</sup> (Figure 7, Figure 9)</b>     |  |   |            |     |      |       |                   |
| t <sub>RJ1D</sub>  | Random Jitter (RMS Value)<br>Test Channels D<br>(7)  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>Clock (RZ)    | 1.25 GHz   |     | 0.5  | 1.1   | ps                |
| t <sub>RJ2D</sub>  |  |   | 1.5625 GHz |     | 0.5  | 1.1   | ps                |
| t <sub>DJ1D</sub>  | Deterministic Jitter (Peak to Peak)<br>Test Channels D<br>(8)                                  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 20   | 40    | ps                |
| t <sub>DJ2D</sub>  |  |   | 3.125 Gbps |     | 20   | 40    | ps                |
| t <sub>TJ1D</sub>  | Total Jitter (Peak to Peak)<br>Test Channels D<br>(9)  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>PRBS-23 (NRZ) | 2.5 Gbps   |     | 0.08 | 0.15  | UI <sub>P-P</sub> |
| t <sub>TJ2D</sub>  |  |   | 3.125 Gbps |     | 0.09 | 0.20  | UI <sub>P-P</sub> |
| <b>JITTER PERFORMANCE WITH PE = Off, EQ = Medium<sup>(3)</sup> (Figure 7, Figure 9)</b>  |  |   |            |     |      |       |                   |
| t <sub>RJ1E</sub>  | Random Jitter (RMS Value)<br>Test Channels E<br>(7)  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>Clock (RZ)    | 1.25 GHz   |     | 0.5  | 1.1   | ps                |
| t <sub>RJ2E</sub>  |  |   | 1.5625 GHz |     | 0.5  | 1.1   | ps                |
| t <sub>DJ1E</sub>  | Residual Deterministic Jitter (Peak to Peak)<br>Test Channels E<br>(8)                         | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 35   | 60    | ps                |
| t <sub>DJ2E</sub>  |  |   | 3.125 Gbps |     | 28   | 55    | ps                |
| <b>JITTER PERFORMANCE WITH PE = Off, EQ = High<sup>(3)</sup> (Figure 7, Figure 9)</b>    |  |   |            |     |      |       |                   |
| t <sub>RJ1F</sub>  | Random Jitter (RMS Value)<br>Test Channels F<br>(7)  | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>Clock (RZ)    | 1.25 GHz   |     | 1.3  | 1.8   | ps                |
| t <sub>RJ2F</sub>  |  |   | 1.5625 GHz |     | 1.4  | 2.4   | ps                |
| t <sub>DJ1F</sub>  | Residual Deterministic Jitter (Peak to Peak)<br>Test Channels F<br>(10)                        | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 30   | 75    | ps                |
| t <sub>DJ2F</sub>  |  |   | 3.125 Gbps |     | 35   | 90    | ps                |
| <b>JITTER PERFORMANCE WITH PE = Medium, EQ = Low<sup>(11)</sup> (Figure 7, Figure 9)</b> |  |   |            |     |      |       |                   |
| t <sub>RJ1G</sub>  | Random Jitter (RMS Value)<br>Input Test Channels D<br>Output Test Channels B<br>(12)           | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>Clock (RZ)    | 1.25 GHz   |     | 0.5  | 1.1   | ps                |
| t <sub>RJ2G</sub>  |  |   | 1.5625 GHz |     | 0.5  | 1.1   | ps                |
| t <sub>DJ1G</sub>  | Deterministic Jitter (Peak to Peak)<br>Input Test Channels D<br>Output Test Channels B<br>(10) | V <sub>ID</sub> = 350 mV<br>V <sub>CM</sub> = 1.2V<br>K28.5 (NRZ)   | 2.5 Gbps   |     | 25   |       | ps                |
| t <sub>DJ2G</sub>  |  |   | 3.125 Gbps |     | 20   |       | ps                |
| <b>SMBus AC SPECIFICATIONS</b>   |  |   |            |     |      |       |                   |
| f <sub>SMB</sub>   | SMBus Operating Frequency  |   | 10         |     | 100  | kHz   |                   |
| t <sub>BUF</sub>   | Bus free time between Stop and Start Conditions  |   | 4.7        |     |      | μs    |                   |
| t <sub>HD:SDA</sub>  | Hold time after (Repeated) Start Condition. After this period, the first clock is generated.   |   | 4.0        |     |      | μs    |                   |
| t <sub>SU:SDA</sub>  | Repeated Start Condition setup time.   |   | 4.7        |     |      | μs    |                   |
| t <sub>SU:SDO</sub>  | Stop Condition setup time  |   | 4.0        |     |      | μs    |                   |
| t <sub>HD:DAT</sub>  | Data hold time   |   | 300        |     |      | ns    |                   |

(10) Tested with a combination of the 1100000101 (K28.5+ character) and 0011111010 (K28.5- character) patterns. Input stimulus jitter is subtracted algebraically.

(11) Specification is guaranteed by characterization and is not tested in production.

(12) Measured on a clock edge with a histogram and an accumulation of 1500 histogram hits. Input stimulus jitter is subtracted geometrically.



### AC Electrical Characteristics (continued)

Over recommended operating supply and temperature ranges unless otherwise specified.<sup>(1)(2)</sup>

| Symbol        | Parameter   | Conditions | Min | Typ | Max | Units   |
|---------------|---|------------|-----|-----|-----|---------|
| $t_{SU:DAT}$  | Data setup time   |            | 250 |     |     | ns      |
| $t_{TIMEOUT}$ | Detect clock low timeout  |            | 25  |     | 35  | ms      |
| $t_{LOW}$     | Clock low period  |            | 4.7 |     |     | $\mu$ s |
| $t_{HIGH}$    | Clock high period   |            | 4.0 |     | 50  | $\mu$ s |
| $t_{POR}$     | Time in which a device must be operational after power-on reset |            |     |     | 500 | ms      |

### DC TEST CIRCUITS


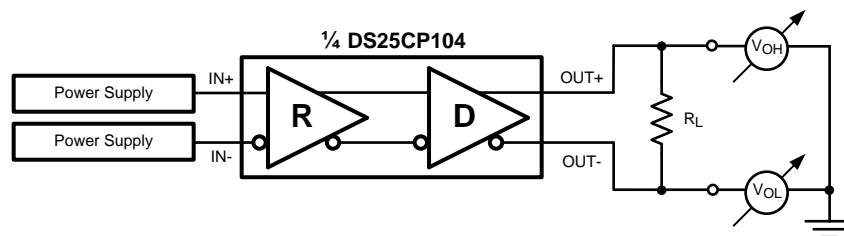


Figure 1. Differential Driver DC Test Circuit

### AC Test Circuits and Timing Diagrams

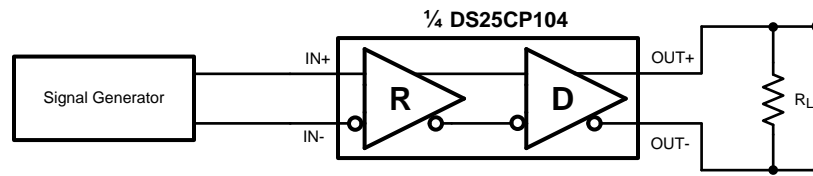

DS25CP114 requires external 100 $\Omega$  input termination.

Figure 2. Differential Driver AC Test Circuit

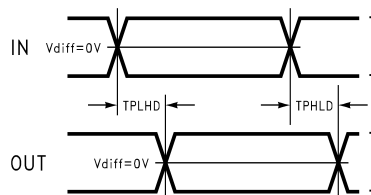


Figure 3. Propagation Delay Timing Diagram


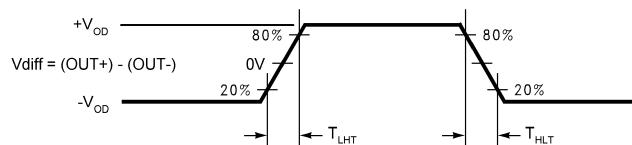



Figure 4. LVDS Output Transition Times

**Pre-Emphasis and Equalization Test Circuits**

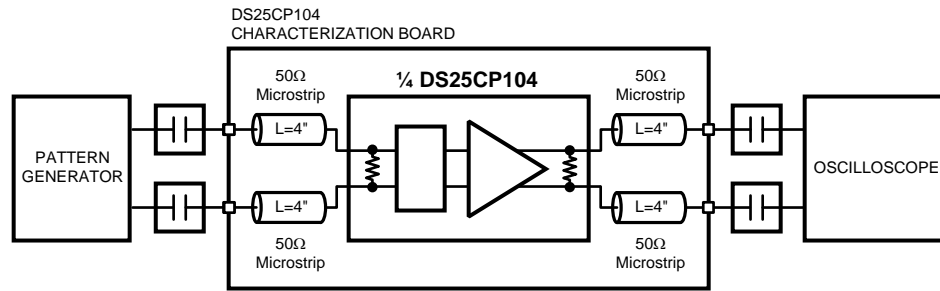


DS25CP114 requires external 100Ω input termination.

**Figure 5. Jitter Performance Test Circuit**

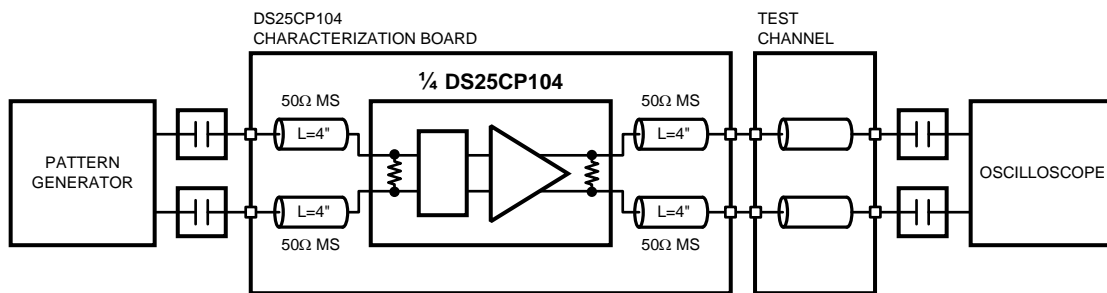


DS25CP114 requires external 100Ω input termination.

**Figure 6. Pre-Emphasis Performance Test Circuit**

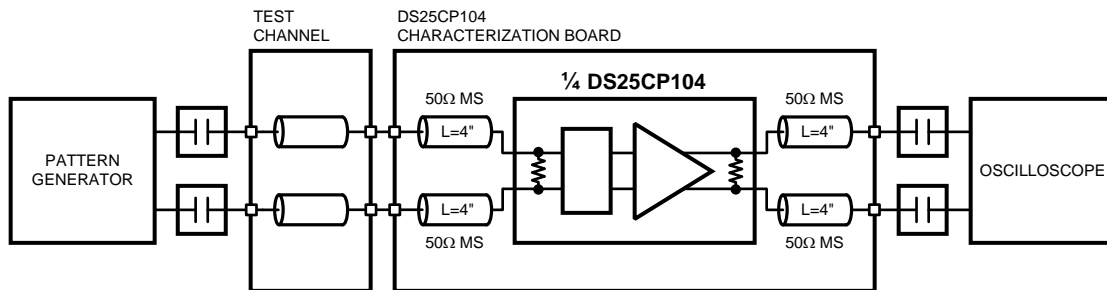

DS25CP114 requires external 100Ω input termination.

**Figure 7. Equalization Performance Test Circuit**

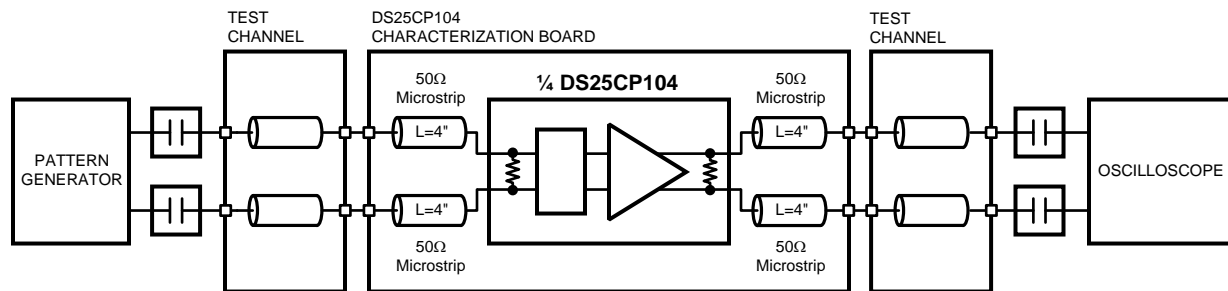

DS25CP114 requires external 100Ω input termination.

**Figure 8. Pre-Emphasis and Equalization Performance Test Circuit**




Figure 9. Test Channel Block Diagram

### Test Channel Loss Characteristics

The test channel was fabricated with Polyclad PCL-FR-370-Laminate/PCL-FRP-370 Prepreg materials (Dielectric constant of 3.7 and Loss Tangent of 0.02). The edge coupled differential striplines have the following geometries: Trace Width (W) = 5 mils, Gap (S) = 5 mils, Height (B) = 16 mils.

| Test Channel | Length (inches) | Insertion Loss (dB) |         |          |          |          |          |
|--------------|-----------------|---------------------|---------|----------|----------|----------|----------|
|              |                 | 500 MHz             | 750 MHz | 1000 MHz | 1250 MHz | 1500 MHz | 1560 MHz |
| A            | 10              | -1.2                | -1.7    | -2.0     | -2.4     | -2.7     | -2.8     |
| B            | 20              | -2.6                | -3.5    | -4.1     | -4.8     | -5.5     | -5.6     |
| C            | 30              | -4.3                | -5.7    | -7.0     | -8.2     | -9.4     | -9.7     |
| D            | 15              | -1.6                | -2.2    | -2.7     | -3.2     | -3.7     | -3.8     |
| E            | 30              | -3.4                | -4.5    | -5.6     | -6.6     | -7.7     | -7.9     |
| F            | 60              | -7.8                | -10.3   | -12.4    | -14.5    | -16.6    | -17.0    |

### Functional Description

The DS25CP104A and DS25CP114 are 3.125 Gbps 4x4 LVDS digital crosspoint switch optimized for high-speed signal routing and switching over lossy FR-4 printed circuit board backplanes and balanced cables. The DS25CP104A and DS25CP114 operate in two modes: Pin Mode (EN\_smb = 0) and SMBus Mode (EN\_smb = 1).

When in the Pin Mode, the switch is fully configurable with external pins. This is possible with two input select pins per output (e.g. S00 and S01 pins for OUT0). There is also one transmit pre-emphasis (PE) level select pin per output for switching the PE levels between Medium and Off settings and one receive equalization (EQ) level select pin per input for switching the EQ levels between Low and Off settings.

In the Pin Mode, feedback from the  $\overline{\text{LOS}}$  (Loss Of Signal) monitor circuitry is not available (there is not an  $\overline{\text{LOS}}$  output pin).

When in the SMBus Mode, the full switch configuration, four levels of transmit pre-emphasis (Off, Low, Medium and High), four levels of receive equalization (Off, Low, Medium and High) and  $\overline{\text{SoftPWN}}$  can be programmed via the SMBus interface. In addition, by using the SMBus interface, a user can obtain the feedback from the built-in  $\overline{\text{LOS}}$  circuitry which detects an open inputs fault condition.

In the SMBus Mode, the S00 and S01 pins become SMBus clock (SCL) input and data (SDA) input pins respectively; the S10, S11, S21 and S21 pins become the User-Set SMBus Slave Address input pins (ADDR0, 1, 2 and 3) while the S30 and S31 pins become non-functional (tying these two pins to either H or L is recommended if the device will function only in the SMBus mode).

In the SMBus Mode, the PE and EQ select pins as well as the  $\overline{\text{PWN}}$  pin remain functional. How these pins function in each mode is explained in the following sections.

## OPERATION IN PIN MODE

### Power Up

In the Pin Mode, when the power is applied to the device power supply pins, the DS25CP104A/DS25CP114 enters the Power Up mode when the  $\overline{\text{PWDN}}$  pin is set to logic H. When in the Power Down mode ( $\overline{\text{PWDN}}$  pin is set to logic L), all circuitry is shut down except the minimum required circuitry for the  $\overline{\text{LOS}}$  and SMBus Slave operation.

### Switch Configuration

In the Pin Mode, the DS25CP104A/DS25CP114 operates as a fully pin-configurable crosspoint switch. The following truth tables illustrate how the switch can be configured with external pins.

### Switch Configuration Truth Tables

**Table 2. Input Select Pins Configuration for the Output OUT0**

| S01 | S00 | INPUT SELECTED |
|-----|-----|----------------|
| 0   | 0   | IN0            |
| 0   | 1   | IN1            |
| 1   | 0   | IN2            |
| 1   | 1   | IN3            |

**Table 3. Input Select Pins Configuration for the Output OUT1**

| S11 | S10 | INPUT SELECTED |
|-----|-----|----------------|
| 0   | 0   | IN0            |
| 0   | 1   | IN1            |
| 1   | 0   | IN2            |
| 1   | 1   | IN3            |

**Table 4. Input Select Pins Configuration for the Output OUT2**

| S21 | S20 | INPUT SELECTED |
|-----|-----|----------------|
| 0   | 0   | IN0            |
| 0   | 1   | IN1            |
| 1   | 0   | IN2            |
| 1   | 1   | IN3            |

**Table 5. Input Select Pins Configuration for the Output OUT3**

| S31 | S30 | INPUT SELECTED |
|-----|-----|----------------|
| 0   | 0   | IN0            |
| 0   | 1   | IN1            |
| 1   | 0   | IN2            |
| 1   | 1   | IN3            |

### Setting Pre-Emphasis Levels

The DS25CP104A/DS25CP114 has one PE level select pin per output for setting the transmit pre-emphasis to either Medium or Off level. The following is the transmit pre-emphasis truth table.

**Table 6. Transmit Pre-Emphasis Truth Table**

| OUTPUT OUT <sub>n</sub> , n = {0, 1, 2, 3}        |                    |
|---|--------------------|
| Pre-Emphasis Control Pin (PE <sub>n</sub> ) State | Pre-Emphasis Level |
| 0   | Off                |
| 1   | Medium             |

### Setting Equalization Levels

The DS25CP104A/DS25CP114 has one EQ level select pin per input for setting the receive equalization to either Low or Off level. The following is the receive equalization truth table.

**Table 7. Receive Equalization Truth Table**

| INPUT IN <sub>n</sub> , n = {0, 1, 2, 3}          |                    |
|---|--------------------|
| Equalization Control Pin (EQ <sub>n</sub> ) State | Equalization Level |
| 0   | Off                |
| 1   | Low                |

## OPERATION IN SMBUS MODE

The DS25CP104A/DS25CP114 operates as a slave on the System Management Bus (SMBus) when the EN\_smb pin is set to a high (1). Under these conditions, the SCL pin is a clock input while the SDA pin is a serial data input pin.

### Device Address

Based on the SMBus 2.0 specification, the DS25CP104A/DS25CP114 has a 7-bit slave address. The three most significant bits of the slave address are hard wired inside the DS25CP104A/DS25CP114 and are "101". The four least significant bits of the address are assigned to pins ADDR3-ADDR0 and are set by connecting these pins to GND for a low (0) or to VCC for a high (1). The complete slave address is shown in the following table:

**Table 8. Slave Address**

| 1   | 0 | 1 | ADDR3 | ADDR2 | ADDR1 | ADDR0 |
|-----|---|---|-------|-------|-------|-------|
| MSB |   |   |       |       |       | LSB   |

This slave address configuration allows up to sixteen DS25CP104A/DS25CP114 devices on a single SMBus bus.

### Transfer of Data via the SMBus

During normal operation the data on SDA must be stable during the time when SCK is high.

There are three unique states for the SMBus:

**START:** A HIGH to LOW transition on SDA while SCK is high indicates a message START condition.

**STOP:** A LOW to HIGH transition on SDA while SCK is high indicates a message STOP condition.

**IDLE:** If SCK and SDA are both high for a time exceeding tBUF from the last detected STOP condition or if they are high for a total exceeding the maximum specification for tHIGH then the bus will transfer to the IDLE state.

### **SMBus Transactions**

A transaction begins with the host placing the DS25CP104A SMBus into the START condition, then a byte (8 bits) is transferred, MSB first, followed by a ninth ACK bit. ACK bits are '0' to signify an ACK, or '1' to signify NACK, after this the host holds the SCL line low, and waits for the receiver to raise the SDA line as an ACKnowledge that the byte has been received.

### **Writing to a Register**

To write a register, the following protocol is used (see SMBus 2.0 specification):

- 1) The Host drives a START condition, the 7-bit SMBus address, and a "0" indicating a WRITE.
- 2) The Device (Slave) drives an ACK bit ("0").
- 3) The Host drives the 8-bit Register Address.
- 4) The Device drives an ACK bit ("0").
- 5) The Host drives the 8-bit data byte.
- 6) The Device drives an ACK bit "0".
- 7) The Host drives a STOP condition.

The WRITE transaction is completed, the bus goes Idle and communication with other SMBus devices may now occur.

### **Reading From a Register**

To read a register, the following protocol is used (see SMBus 2.0 specification):

- 1) The Host drives a START condition, the 7-bit SMBus address, and a "0" indicating a WRITE.
- 2) The Device (Slave) drives an ACK bit ("0").
- 3) The Host drives the 8-bit Register Address.
- 4) The Device drives an ACK bit ("0").
- 5) The Host drives a START condition.
- 6) The Host drives the 7-bit SMBus Address, and a "1" indicating a READ.
- 7) The Device drives an ACK bit "0".
- 8) The Device drives the 8-bit data value (register contents).
- 9) The Host drives a NACK bit "1" indicating end of READ transfer.
- 10) The Host drives a STOP condition.

The READ transaction is completed, the bus goes Idle and communication with other SMBus devices may now occur.

### **Register Descriptions**


There are five data registers in the DS25CP104A/DS25CP114 accessible via the SMBus interface.

**Table 9. SMBus Data Registers**

| Address (hex) | Name                 | Access | Description   |
|---------------|----------------------|--------|---|
| 0             | Switch Configuration | R/W    | Switch Configuration Register                               |
| 1             | PE Level Select      | R/W    | Transmit Pre-emphasis Level Select Register                 |
| 2             | EQ Level Select      | R/W    | Receive Equalization Level Select Register                  |
| 3             | Control              | R/W    | Powerdown, $\overline{LOS}$ Enable and Pin Control Register |

**Table 9. SMBus Data Registers (continued)**

| Address (hex) | Name                    | Access | Description   |
|---------------|-------------------------|--------|---|
| 4             | $\overline{\text{LOS}}$ | RO     | Loss Of Signal ( $\overline{\text{LOS}}$ ) Reporting Register |

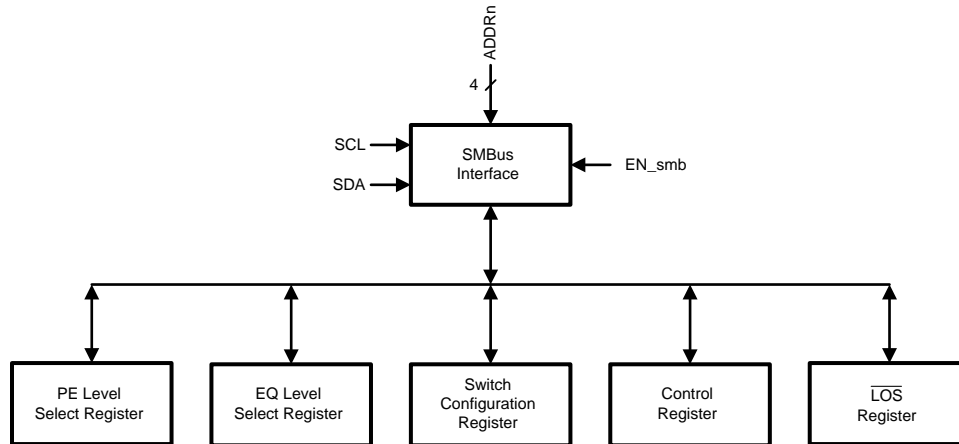

**Figure 10. Registers Block Diagram**

### SWITCH CONFIGURATION REGISTER

The Switch Configuration register is utilized to configure the switch. The following two tables show the Switch Configuration Register mapping and associated truth table.

**Switch Configuration Register Mapping**

| Bit    | Default | Bit Name       | Access | Description                                |
|--------|---------|----------------|--------|--|
| D[1:0] | 00      | Input Select 0 | R/W    | Selects which input is routed to the OUT0. |
| D[3:2] | 00      | Input Select 1 | R/W    | Selects which input is routed to the OUT1. |
| D[5:4] | 00      | Input Select 2 | R/W    | Selects which input is routed to the OUT2. |
| D[7:6] | 00      | Input Select 3 | R/W    | Selects which input is routed to the OUT3. |

**Switch Configuration Register Truth Table**

| D1 | D0 | Input Routed to the OUT0 |
|----|----|--------------------------|
| 0  | 0  | IN0                      |
| 0  | 1  | IN1                      |
| 1  | 0  | IN2                      |
| 1  | 1  | IN3                      |

The switch configuration logic has a SmartPWDN circuitry which automatically optimizes the device's power consumption based on the switch configuration (i.e. It places unused I/O blocks and other unused circuitry in the power down state).

### PE LEVEL SELECT REGISTER

The PE Level Select register selects the pre-emphasis level for each of the outputs. The following two tables show the register mapping and associated truth table.

**PE Level Select Register Table**

| Bit    | Default | Bit Name          | Access | Description                          |
|--------|---------|-------------------|--------|--------------------------------------|
| D[1:0] | 00      | PE Level Select 0 | R/W    | Sets pre-emphasis level on the OUT0. |

**PE Level Select Register Table (continued)**

| Bit    | Default | Bit Name          | Access | Description                          |
|--------|---------|-------------------|--------|--------------------------------------|
| D[3:2] | 00      | PE Level Select 1 | R/W    | Sets pre-emphasis level on the OUT1. |
| D[5:4] | 00      | PE Level Select 2 | R/W    | Sets pre-emphasis level on the OUT2. |
| D[7:6] | 00      | PE Level Select 3 | R/W    | Sets pre-emphasis level on the OUT3. |

**PE Level Select Register Truth Table**

| D1 | D0 | Pre-Emphasis Level for the OUT0 |
|----|----|---------------------------------|
| 0  | 0  | Off                             |
| 0  | 1  | Low                             |
| 1  | 0  | Medium                          |
| 1  | 1  | High                            |

**EQ LEVEL SELECT REGISTER**

The EQ Level Select register selects the equalization level for each of the inputs. The following two tables show the register mapping and associated truth table.

| Bit    | Default | Bit Name          | Access | Description                         |
|--------|---------|-------------------|--------|-------------------------------------|
| D[1:0] | 00      | EQ Level Select 0 | R/W    | Sets equalization level on the IN0. |
| D[3:2] | 00      | EQ Level Select 1 | R/W    | Sets equalization level on the IN1. |
| D[5:4] | 00      | EQ Level Select 2 | R/W    | Sets equalization level on the IN2. |
| D[7:6] | 00      | EQ Level Select 3 | R/W    | Sets equalization level on the IN3. |

**Table 10. EQ Level Select Register Truth Table**

| D1 | D0 | Equalization Level for the IN0 |
|----|----|--------------------------------|
| 0  | 0  | Off                            |
| 0  | 1  | Low                            |
| 1  | 0  | Medium                         |
| 1  | 1  | High                           |

**CONTROL REGISTER**

The Control register enables  $\overline{\text{SoftPwDn}}$  control, individual output power down ( $\overline{\text{PwDnN}}$ ) control,  $\overline{\text{LOS}}$  Circuitry Enable control, PE Level Select Enable control and EQ Level Select Enable control via the SMBus. The following table shows the register mapping.

**Table 11. Register Mapping Table**

| Bit    | Default | Bit Name                    | Access | Description  |
|--------|---------|-----------------------------|--------|--|
| D[3:0] | 1111    | $\overline{\text{PwDnN}}$   | R/W    | Writing a [0] to the bit D[n] will power down the output OUTn when either the $\overline{\text{PwDn}}$ pin OR the Control Register bit D[7] ( $\overline{\text{SoftPwDn}}$ ) is set to a high [1].   |
| D[4]   | 0       | Ignore_External_EQ          | R/W    | Writing a [1] to the bit D[4] will ignore the state of the external EQ pins and will allow setting the EQ levels via the SMBus interface.  |
| D[5]   | 0       | Ignore_External_PE          | R/W    | Writing a [1] to the bit D[5] will ignore the state of the external PE pins and will allow setting the PE levels via the SMBus interface.  |
| D[6]   | 0       | EN_ $\overline{\text{LOS}}$ | R/W    | Writing a [1] to the bit D[6] will enable the $\overline{\text{LOS}}$ circuitry and receivers on all four inputs. The SmartPwDn circuitry will not disable any of the inputs nor any supporting LOS circuitry depending on the switch configuration. |



**Table 11. Register Mapping Table (continued)**

| Bit  | Default | Bit Name                    | Access | Description  |
|------|---------|-----------------------------|--------|--|
| D[7] | 0       | $\overline{\text{SoftPWN}}$ | R/W    | Writing a [0] to the bit D[7] will place the device into the power down mode. This pin is ORed together with the PWDN pin. |

**Table 12. Power Modes Truth Table**

| $\overline{\text{PWDN}}$ | $\overline{\text{SoftPWN}}$ | $\overline{\text{PWNn}}$ | Power Mode   |
|--------------------------|-----------------------------|--------------------------|--|
| 0                        | 0                           | x                        | Power Down Mode. In this mode, all circuitry is shut down except the minimum required circuitry for the LOS and SMBus Slave operation. The SMBus circuitry allows enabling the LOS circuitry and receivers on all inputs in this mode by setting the EN_LOS bit to a [1].  |
| 0<br>1<br>1              | 1<br>0<br>1                 | x<br>x<br>x              | Power Up Mode. In this mode, the SmartPWN circuitry will automatically power down any unused I/O and logic blocks and other supporting circuitry depending on the switch configuration. An output will be enabled <b>only</b> when the SmartPWN circuitry indicates that that particular output is needed for the particular switch configuration <b>and</b> the respective PWNn bit has logic high [1]. An input will be enabled when the SmartPWN circuitry indicates that that particular input is needed for the particular switch configuration <b>or</b> the EN_LOS bit is set to a [1]. |

## $\overline{\text{LOS}}$ REGISTER

The  $\overline{\text{LOS}}$  register reports an open inputs fault condition for each of the inputs. The following table shows the register mapping.

| Bit    | Default | Bit Name                 | Access | Description  |
|--------|---------|--------------------------|--------|--|
| D[0]   | 0       | $\overline{\text{LOS0}}$ | RO     | Reading a [0] from the bit D[0] indicates an open inputs fault condition on the IN0. A [1] indicates presence of a valid signal. |
| D[1]   | 0       | $\overline{\text{LOS1}}$ | RO     | Reading a [0] from the bit D[1] indicates an open inputs fault condition on the IN1. A [1] indicates presence of a valid signal. |
| D[2]   | 0       | $\overline{\text{LOS2}}$ | RO     | Reading a [0] from the bit D[2] indicates an open inputs fault condition on the IN2. A [1] indicates presence of a valid signal. |
| D[3]   | 0       | $\overline{\text{LOS3}}$ | RO     | Reading a [0] from the bit D[3] indicates an open inputs fault condition on the IN3. A [1] indicates presence of a valid signal. |
| D[7:4] | 0000    | Reserved                 | RO     | Reserved for future use. Returns undefined value when read.  |

## INPUT INTERFACING

The DS25CP104A/DS25CP114 accepts differential signals and allows simple AC or DC coupling. With a wide common mode range, the DS25CP104A/DS25CP114 can be DC-coupled with all common differential drivers (i.e. LVPECL, LVDS, CML). The following three figures illustrate typical DC-coupled interface to common differential drivers.

The DS25CP104A inputs are internally terminated with a 100Ω resistor for optimal device performance, reduced component count, and minimum board space. External input terminations on the DS25CP114 need to be placed as close as possible to the device inputs to achieve equivalent AC performance. When all four inputs are utilized it may be necessary to alternate between the top and bottom layers to achieve the minimum device input to termination distance. It is recommended that SMT resistors sized 0402 or smaller be used and the mounting distance to the DS25CP114 pins kept under 200 mils.

When using the DS25CP114 in a limited multi-drop topology, any transmission line stubs should be kept very short to minimize any negative effects on signal quality. A single termination resistor or resistor network that matches the differential line impedance should be used. If DS25CP114 input pairs from two separate devices are to be connected to a single differential output, it is recommended that the DS25CP114 devices are mounted directly opposite of each other. One on top of the PCB and the other directly under the first on the bottom of the PCB, this keeps the distance between inputs equal to the PCB thickness.

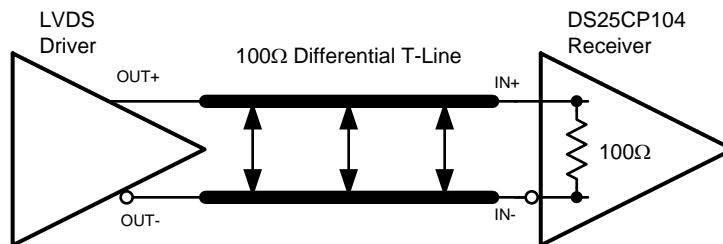


Figure 11. Typical LVDS Driver DC-Coupled Interface to DS25CP104A Input


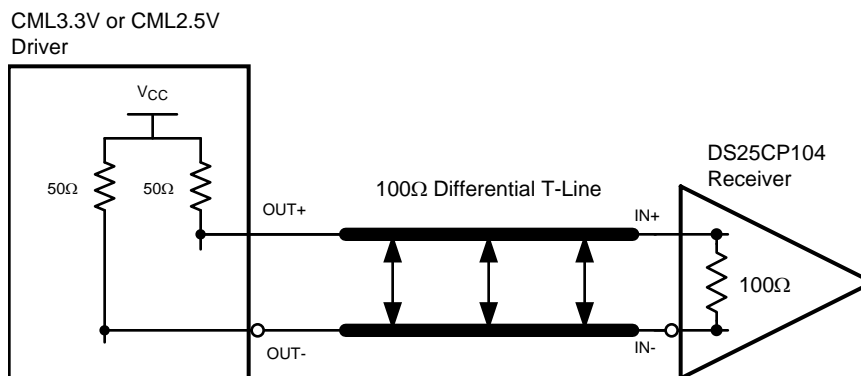


Figure 12. Typical CML Driver DC-Coupled Interface to DS25CP104A Input

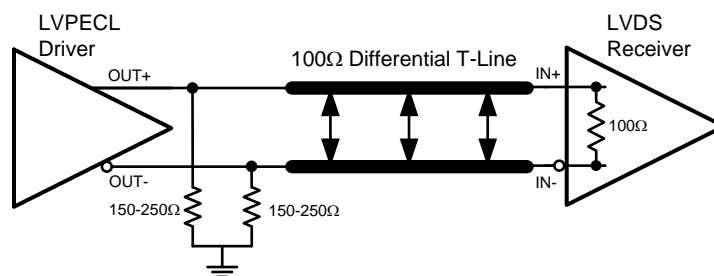

DS25CP114 requires external 100Ω input termination.

Figure 13. Typical LVPECL Driver DC-Coupled Interface to DS25CP104A Input

### OUTPUT INTERFACING

The DS25CP104A/DS25CP114 outputs signals that are compliant to the LVDS standard. Its outputs can be DC-coupled to most common differential receivers. The following figure illustrates a typical DC-coupled interface to common differential receivers and assumes that the receivers have high impedance inputs. While most differential receivers have a common mode input range that can accommodate LVDS compliant signals, it is recommended to check the respective receiver's data sheet prior to implementing the suggested interface implementation.

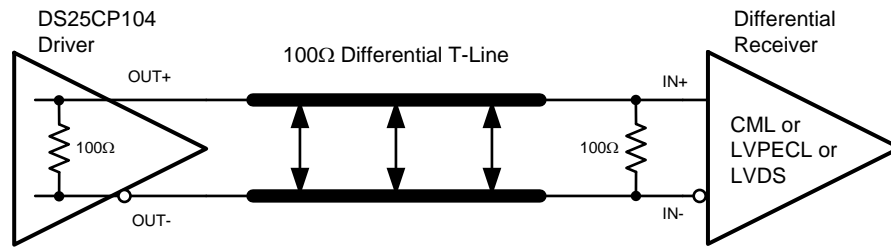


Figure 14. Typical Output DC-Coupled Interface to an LVDS, CML or LVPECL Receiver

Typical Performance Characteristics

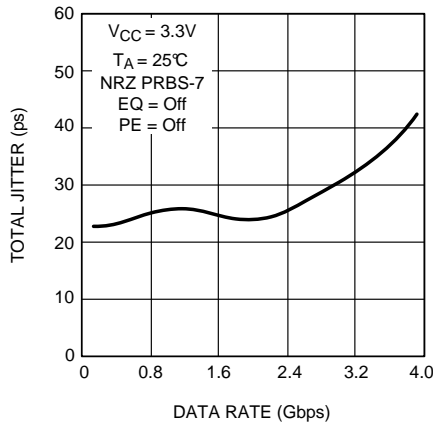


Figure 15. Total Jitter as a Function of Data Rate

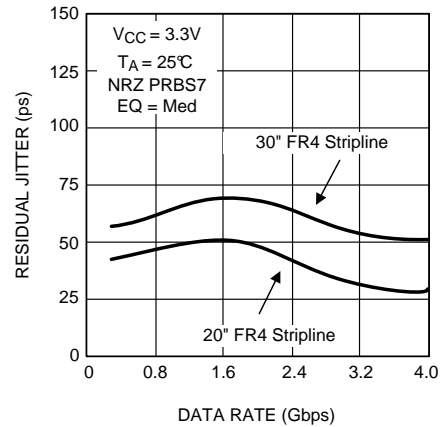


Figure 16. Residual Jitter as a Function of Data Rate, FR4 Stripline Length and EQ Level

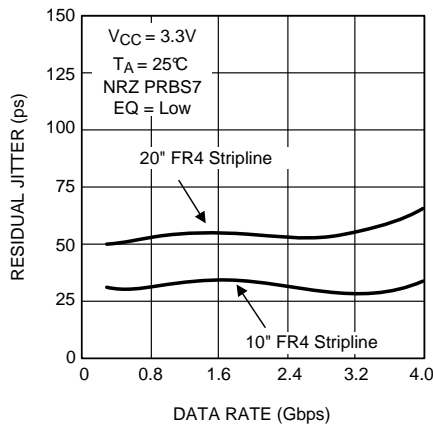


Figure 17. Residual Jitter as a Function of Data Rate, FR4 Stripline Length and EQ Level

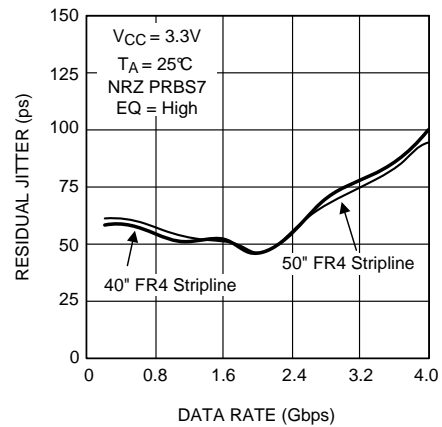


Figure 18. Residual Jitter as a Function of Data Rate, FR4 Stripline Length and EQ Level

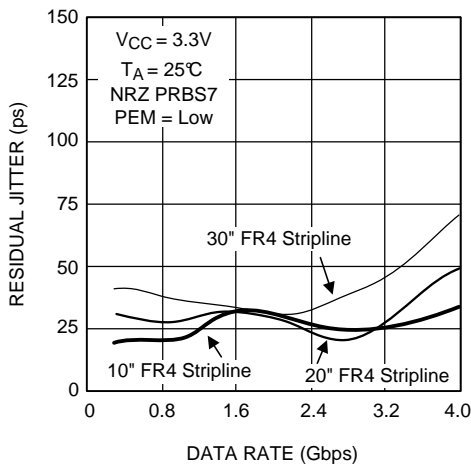


Figure 19. Residual Jitter as a Function of Data Rate, FR4 Stripline Length and PE Level

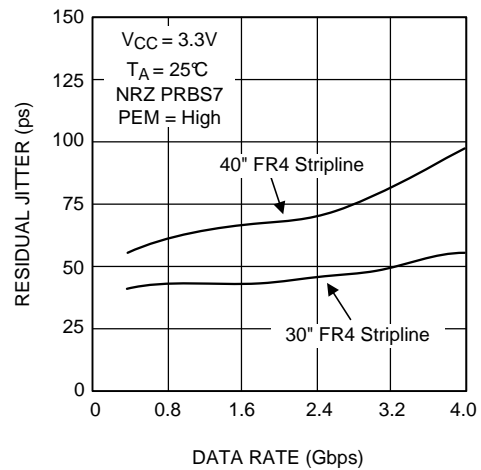


Figure 20. Residual Jitter as a Function of Data Rate, FR4 Stripline Length and PE Level

Typical Performance Characteristics (continued)

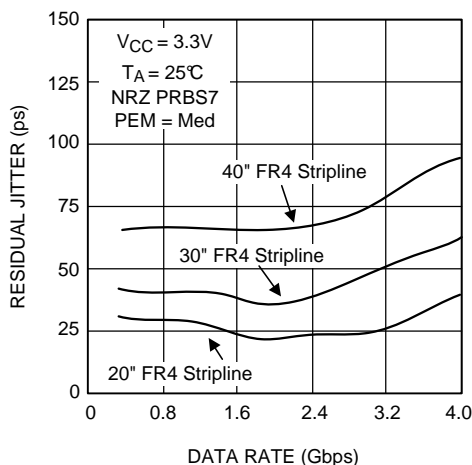


Figure 21. Residual Jitter as a Function of Data Rate, FR4 Stripline Length and PE Level

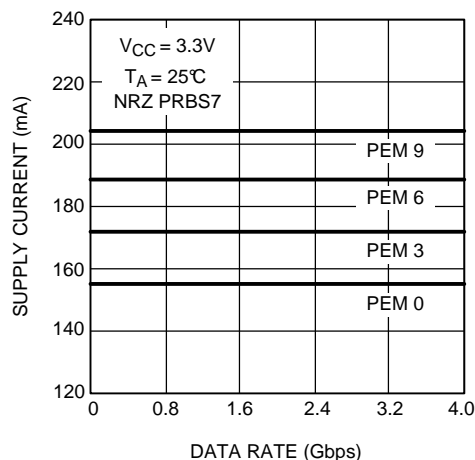


Figure 22. Supply Current as a Function of Data Rate and PE Level

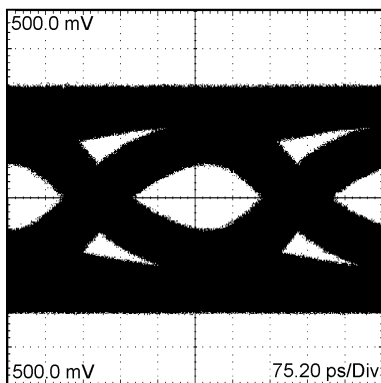


Figure 23. A 2.5 Gbps NRZ PRBS-23 without PE After 30" Differential FR-4 Stripline  
H: 75 ps / DIV, V: 100 mV / DIV

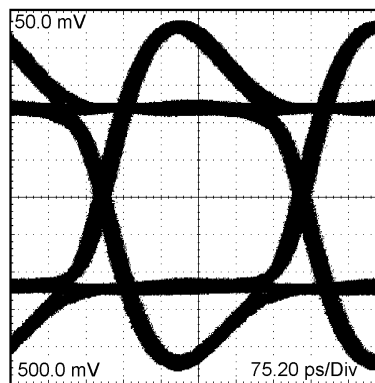


Figure 24. A 2.5 Gbps NRZ PRBS-23 with High PE After 2" Differential FR-4 Microstrip  
H: 75 ps / DIV, V: 100 mV / DIV

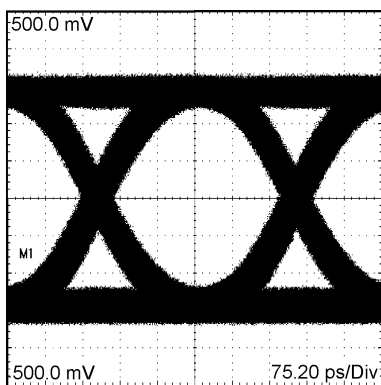


Figure 25. A 2.5 Gbps NRZ PRBS-23 with High PE After 30" Differential FR-4 Stripline  
H: 75 ps / DIV, V: 100 mV / DIV



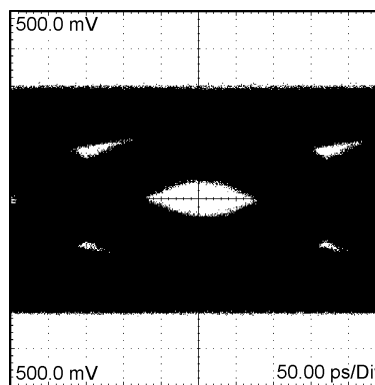


Figure 26. A 3.125 Gbps NRZ PRBS-23 without PE After 30" Differential FR-4 Stripline  
H: 50 ps / DIV, V: 100 mV / DIV


**Typical Performance Characteristics (continued)**

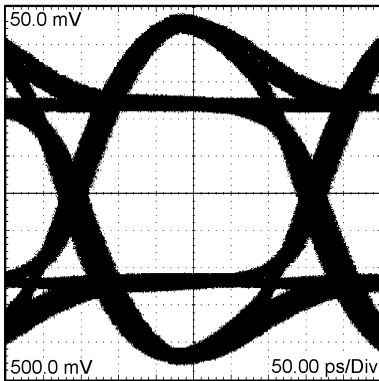


**Figure 27. A 3.125 Gbps NRZ PRBS-23 with High PE After 2" Differential FR-4 Microstrip  
H: 50 ps / DIV, V: 100 mV / DIV**

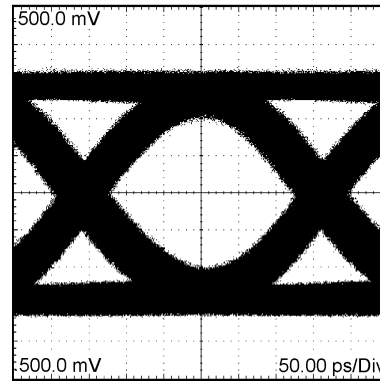


**Figure 28. A 3.125 Gbps NRZ PRBS-23 with High PE After 30" Differential FR-4 Stripline  
H: 50 ps / DIV, V: 100 mV / DIV**

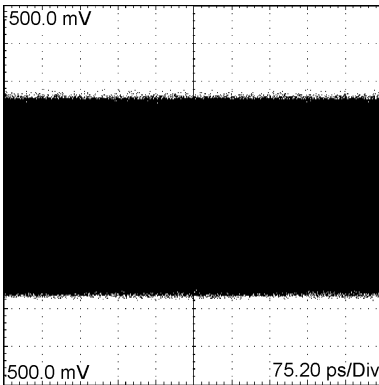


**Figure 29. A 2.5 Gbps NRZ PRBS-23 without EQ After 60" Differential FR-4 Stripline  
H: 75 ps / DIV, V: 100 mV / DIV**

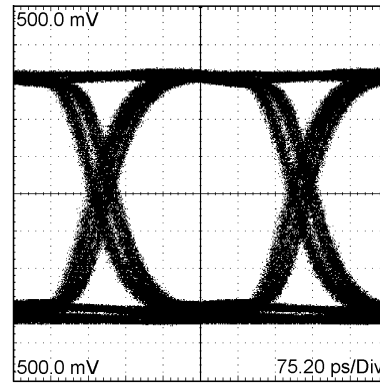

**Figure 30. A 2.5 Gbps NRZ PRBS-23 with High EQ After 60" Differential FR-4 Stripline  
H: 75 ps / DIV, V: 100 mV / DIV**

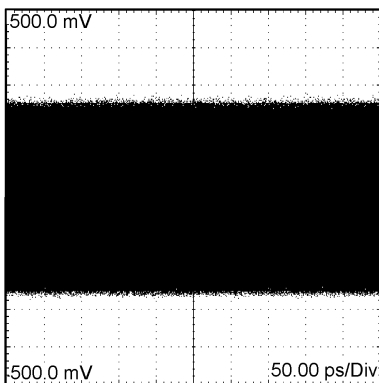

**Figure 31. A 3.125 Gbps NRZ PRBS-23 without EQ After 60" Differential FR-4 Stripline  
H: 50 ps / DIV, V: 100 mV / DIV**

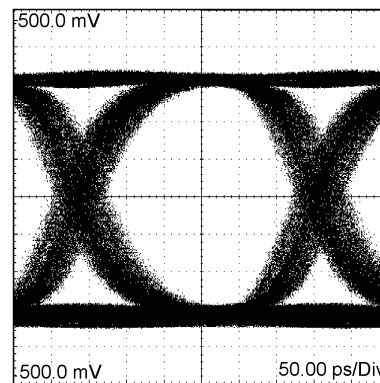

**Figure 32. A 3.125 Gbps NRZ PRBS-23 with High EQ After 60" Differential FR-4 Stripline  
H: 50 ps / DIV, V: 100 mV / DIV**

---

## REVISION HISTORY

| <b>Changes from Revision B (March 2013) to Revision C</b>  | <b>Page</b>        |
|--|--------------------|
| • Changed layout of National Data Sheet to TI format ..... | <a href="#">22</a> |

---

**PACKAGING INFORMATION**

| Orderable Device    | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|---------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| DS25CP104ATSQ/NOPB  | ACTIVE        | WQFN         | RTA                | 40   | 250            | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 85    | 2CP104AS                | <a href="#">Samples</a> |
| DS25CP104ATSQX/NOPB | ACTIVE        | WQFN         | RTA                | 40   | 2500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 85    | 2CP104AS                | <a href="#">Samples</a> |
| DS25CP114TSQ/NOPB   | ACTIVE        | WQFN         | RTA                | 40   | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 85    | 2CP114SQ                | <a href="#">Samples</a> |
| DS25CP114TSQE/NOPB  | ACTIVE        | WQFN         | RTA                | 40   | 250            | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 85    | 2CP114SQ                | <a href="#">Samples</a> |
| DS25CP114TSQX/NOPB  | ACTIVE        | WQFN         | RTA                | 40   | 2500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 85    | 2CP114SQ                | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.



<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal


| Device              | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DS25CP104ATSQ/NOPB  | WQFN         | RTA             | 40   | 250  | 178.0              | 16.4               | 6.3     | 6.3     | 1.5     | 12.0    | 16.0   | Q1            |
| DS25CP104ATSQX/NOPB | WQFN         | RTA             | 40   | 2500 | 330.0              | 16.4               | 6.3     | 6.3     | 1.5     | 12.0    | 16.0   | Q1            |
| DS25CP114TSQ/NOPB   | WQFN         | RTA             | 40   | 1000 | 330.0              | 16.4               | 6.3     | 6.3     | 1.5     | 12.0    | 16.0   | Q1            |
| DS25CP114TSQE/NOPB  | WQFN         | RTA             | 40   | 250  | 178.0              | 16.4               | 6.3     | 6.3     | 1.5     | 12.0    | 16.0   | Q1            |
| DS25CP114TSQX/NOPB  | WQFN         | RTA             | 40   | 2500 | 330.0              | 16.4               | 6.3     | 6.3     | 1.5     | 12.0    | 16.0   | Q1            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal




| Device              | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DS25CP104ATSQ/NOPB  | WQFN         | RTA             | 40   | 250  | 213.0       | 191.0      | 55.0        |
| DS25CP104ATSQX/NOPB | WQFN         | RTA             | 40   | 2500 | 367.0       | 367.0      | 38.0        |
| DS25CP114TSQ/NOPB   | WQFN         | RTA             | 40   | 1000 | 367.0       | 367.0      | 38.0        |
| DS25CP114TSQE/NOPB  | WQFN         | RTA             | 40   | 250  | 213.0       | 191.0      | 55.0        |
| DS25CP114TSQX/NOPB  | WQFN         | RTA             | 40   | 2500 | 367.0       | 367.0      | 38.0        |

RTA0040A

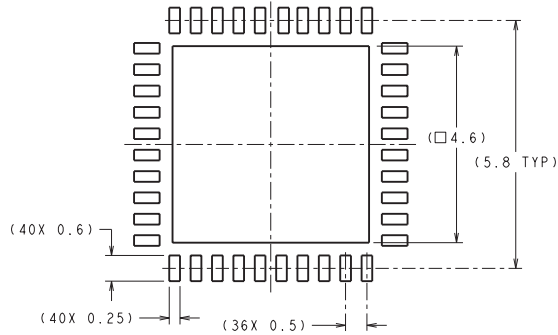

DIMENSIONS ARE IN MILLIMETERS  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

RECOMMENDED LAND PATTERN

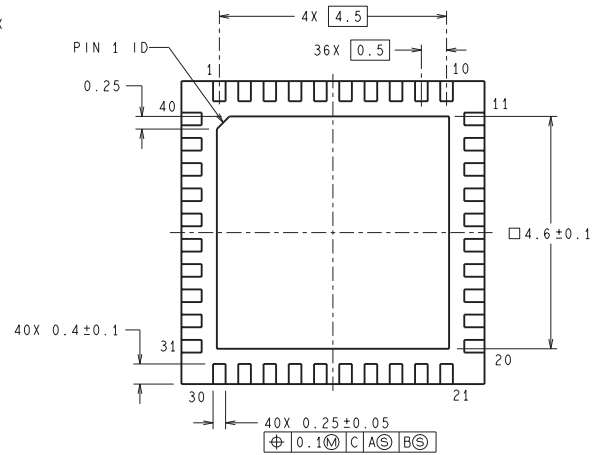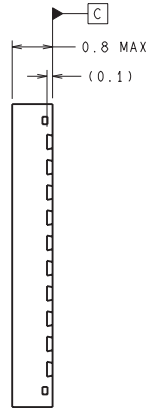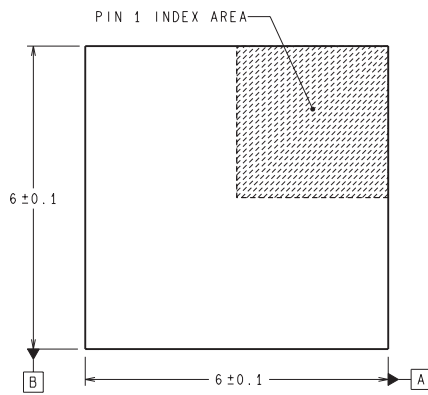

SQA40A (Rev B)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |  |
|------------------------------|--|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)