


Surface Mount Low Leakage Diode



Features:

- Low leakage current.
- High reverse breakdown voltage.
- Fast switching speed.
- Surface mount package ideally suited for automatic insertion



Application:

- Surface mount fast switching diode.

Maximum Rating @ TA = 25°C unless otherwise specified





Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	350	V
Working Peak Reverse Voltage DC Reverse Voltage	V _{RWM} V _R	300	V
RMS Reverse Voltage	V _{R(RMS)}	212	V
Forward Continuous Current	I _{FM}	225	mA
Repetitive Peak Forward Current	I _{FRM}	625	mA
Non-Repetitive Peak Forward Surge Current @t=1.0us @t=1.0s	I _{FSM}	4 1	A
Power Dissipation	P _d	400	mW
Thermal Resistance Junction to Ambient Air	R _{θJA}	312	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150	°C

Electrical Characteristics @ TA = 25°C unless otherwise specified

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Reverse Breakdown Voltage	V _{(BR)R}	350		-	V	I _R = 150µA
Forward Voltage	V _F	-	0.78 0.93 1.03	0.87 1 1.25	V	I _F = 20mA I _F = 100mA I _F = 200mA
Reverse Current	I _R	-	30 35	100 100	nA uA	V _R = 240V, T _j = 25°C V _R = 240V, T _j = 150°C
Total Capacitance	C _T	-	1	5	pF	V _R = 0V, f = 1MHz
Reverse Recovery Time	t _{rr}	-	-	50	ns	I _F = I _R = 30mA, I _{rr} = 0.1 × I _R , R _L = 100Ω

Surface Mount Low Leakage Diode


Typical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

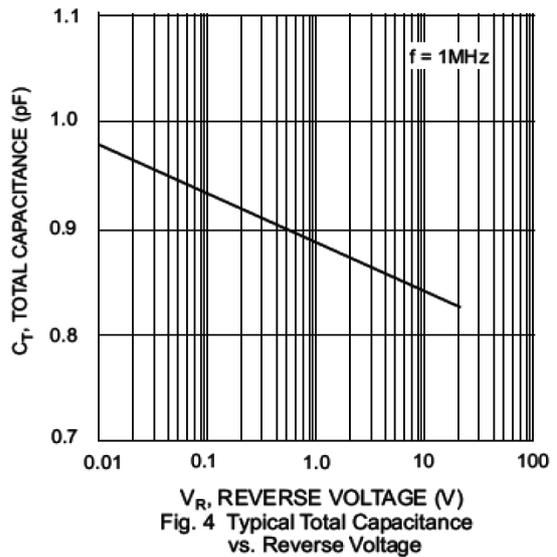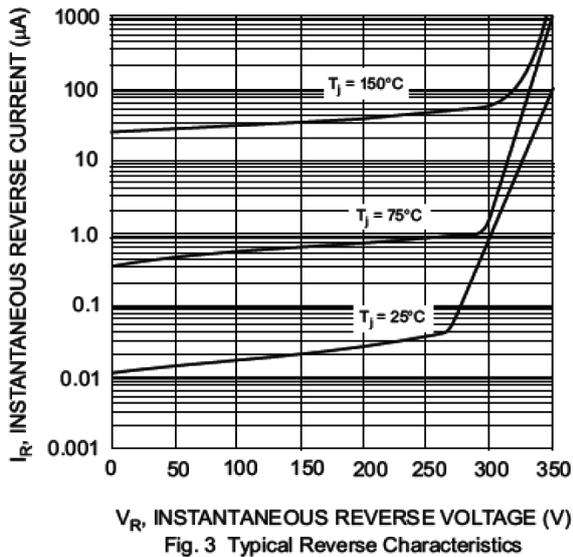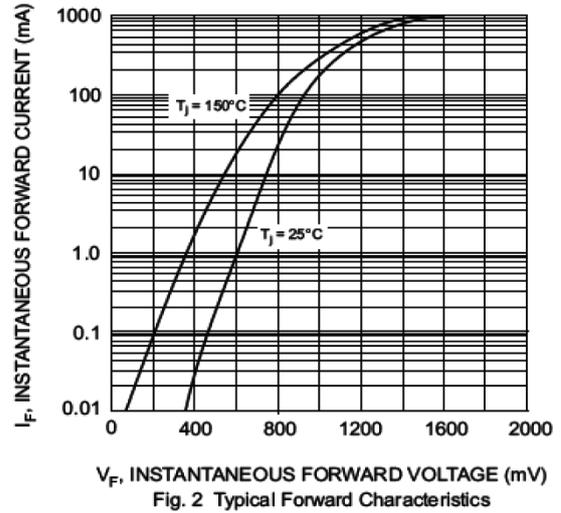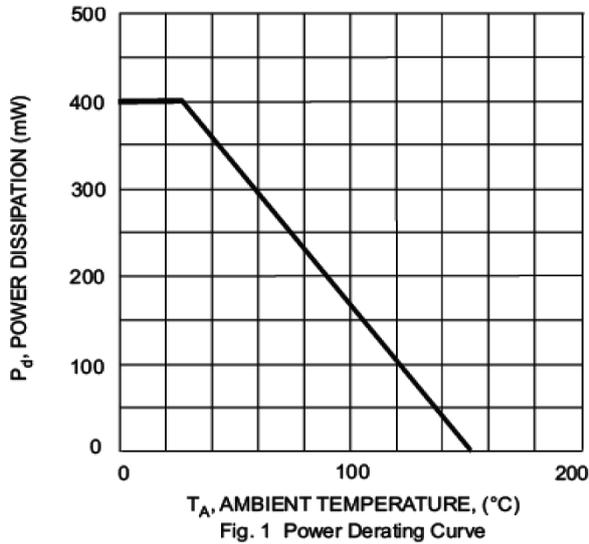

Surface Mount Low Leakage Diode


Package Outline:

Plastic surface mounted package

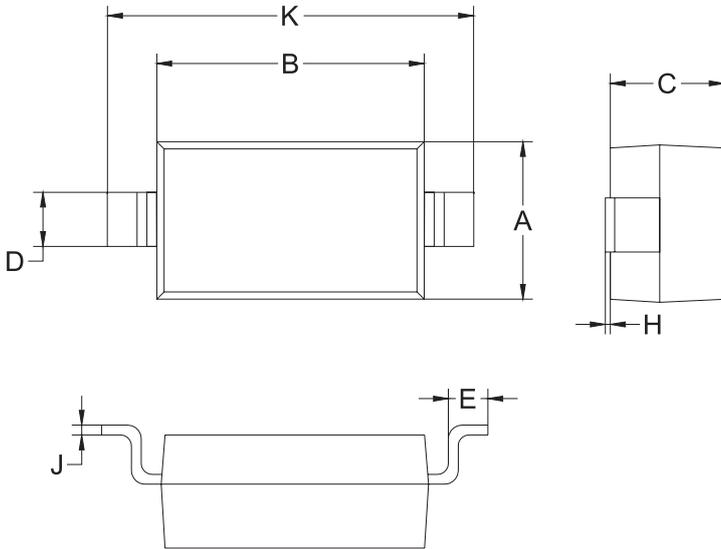

SOD-123		
Dim	Min.	Max.
A	1.45	1.75
B	2.55	2.85
C	1.15 Typical	
D	0.55 Typical	
E	0.25	0.45
H	0.02	0.1
J	0.1 Typical	
K	3.55	3.85
All Dimensions in mm		

Soldering Footprint:

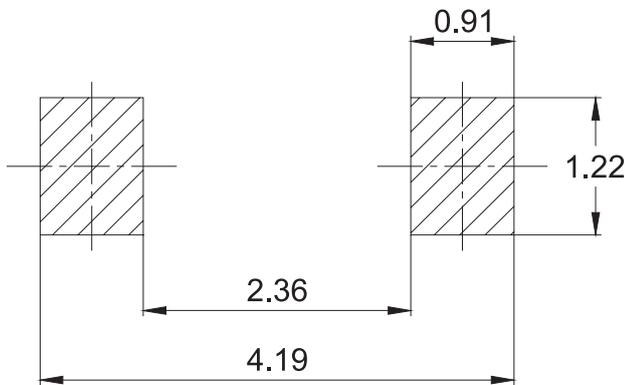

Dimensions : Millimetres

Part Number Table

Description	Part Number
Diode, Fast Recovery, 225mA, 350V, SOD-123	BAV3004W-7-F

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.