

DETAILS

Product Number	C13485_ANNA-40-7-W
Family	Anna-40-7
Type	Lens array
Color	clear
Diameter	40 mm
Height	10,7 mm
Style	round
Optic Material	PMMA
Holder Material	
Fastening	
Status	ready
ROHS Compliant	Yes
Date Updated	16/09/2014



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	connector
LUXEON PWT	(simulated) 14.7		(simulated) 88 %	(simulated) 8.565	-
NF2x757A	(simulated) 19.5		(simulated) 92 %	(simulated) 4.978	-
Oslon Square EC	(simulated) 31.5		(simulated) 91 %	(simulated) 2.760	-
LUXEON T	(simulated) 30		(simulated) 92 %	(simulated) 2.912	-
SFH 4715S (IR)	(simulated) 18		(simulated) 89 %	(simulated) 6.614	-
H35C0 (LEMWA33)	(simulated) 18		(simulated) 86 %	(simulated) 5.092	-
C3535 (Intematix)	(simulated) 17		(simulated) 93 %	(simulated) 3.777	-
XP-G	(simulated) 42		(simulated) 92 %	(simulated) 1.872	-
XB-D	(simulated) 35.4		(simulated) 89 %	(simulated) 2.261	-
NCSxx19A	(simulated) 24.1		(simulated) 88 %	(simulated) 3.847	-
Double Dome (GM2BB)	(simulated) 28.9		(simulated) 89 %	(simulated) 2.717	-
XP-L	(simulated) 41		(simulated) 88 %	(simulated) 1.470	-
XT-E	33 degrees		86 %	2.030	-
XP-G2	36 degrees		88 %	1.950	-

D


C

B

A

4


4

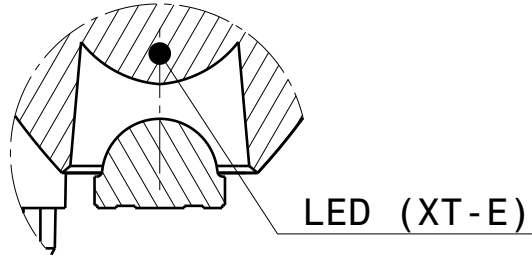


Detail B
Scale: 5:1

3

3





Section view A-A
Scale: 1:1



Isometric view
Scale: 1:1

2

2

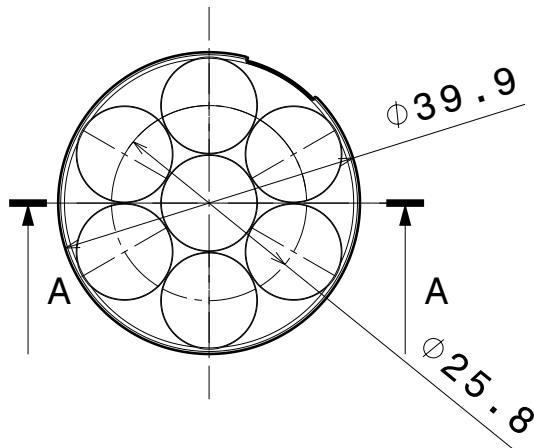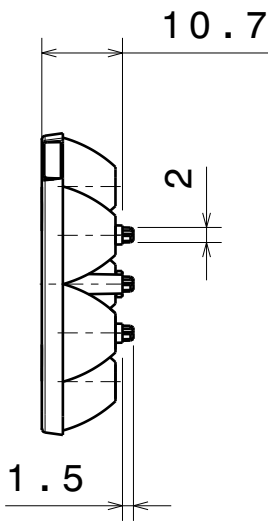


INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	ANNA-40-7-series		PMMA	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class F, otherwise class M.
According to DIN ISO 2768-2
Form and position: class K

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:



DRAWING TITLE

ANNA-40-7-series

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy."

SIZE PART NUMBER

A4

-


SCALE 1:1 WEIGHT 7,60 g SHEET 1/1

D


A

1


Luminaire: LEDiL C13485_ANNA-40-7-W_(XT-E)
Lamps: 1 x XT-E 724lm@250mA

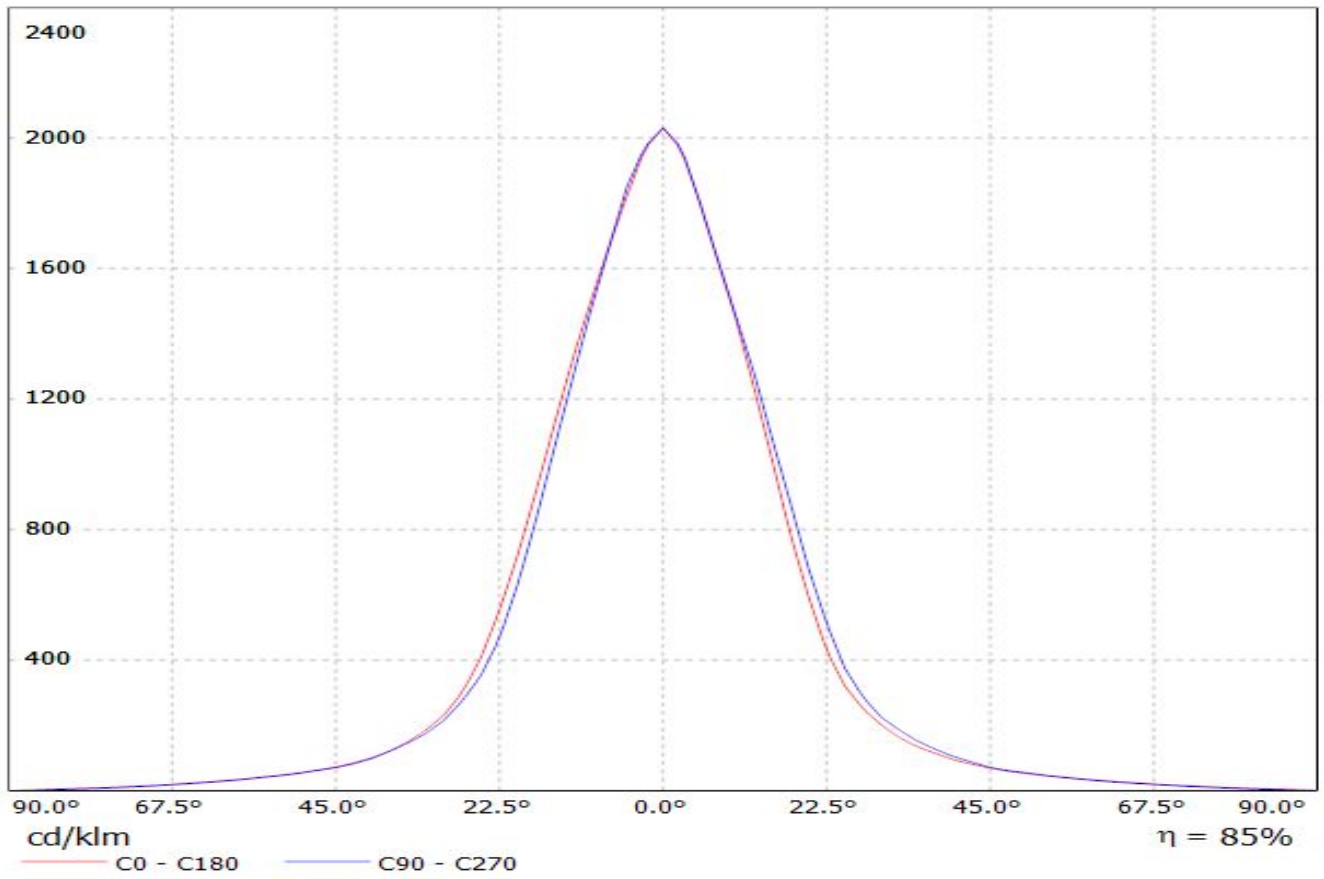


Luminaire: LEDiL C13485_ANNA-40-7-W_(XP-G2)
Lamps: 1 x CREE XP-G2 697lm@250mA

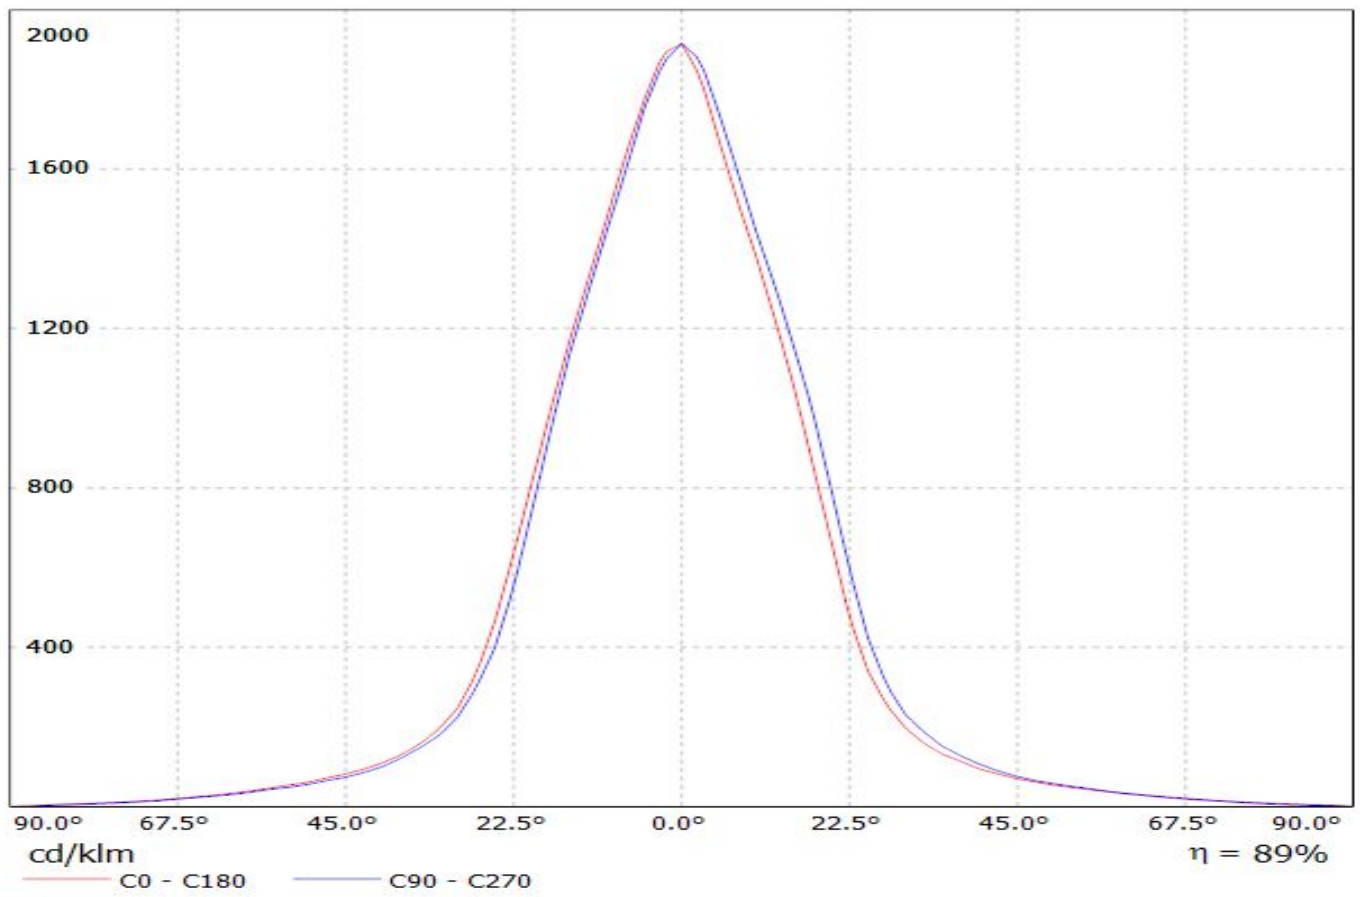

Luminaire: LEDiL C13485_ANNA-40-7-W_(XT-E)
Lamps: 1 x XT-E 724lm@250mA

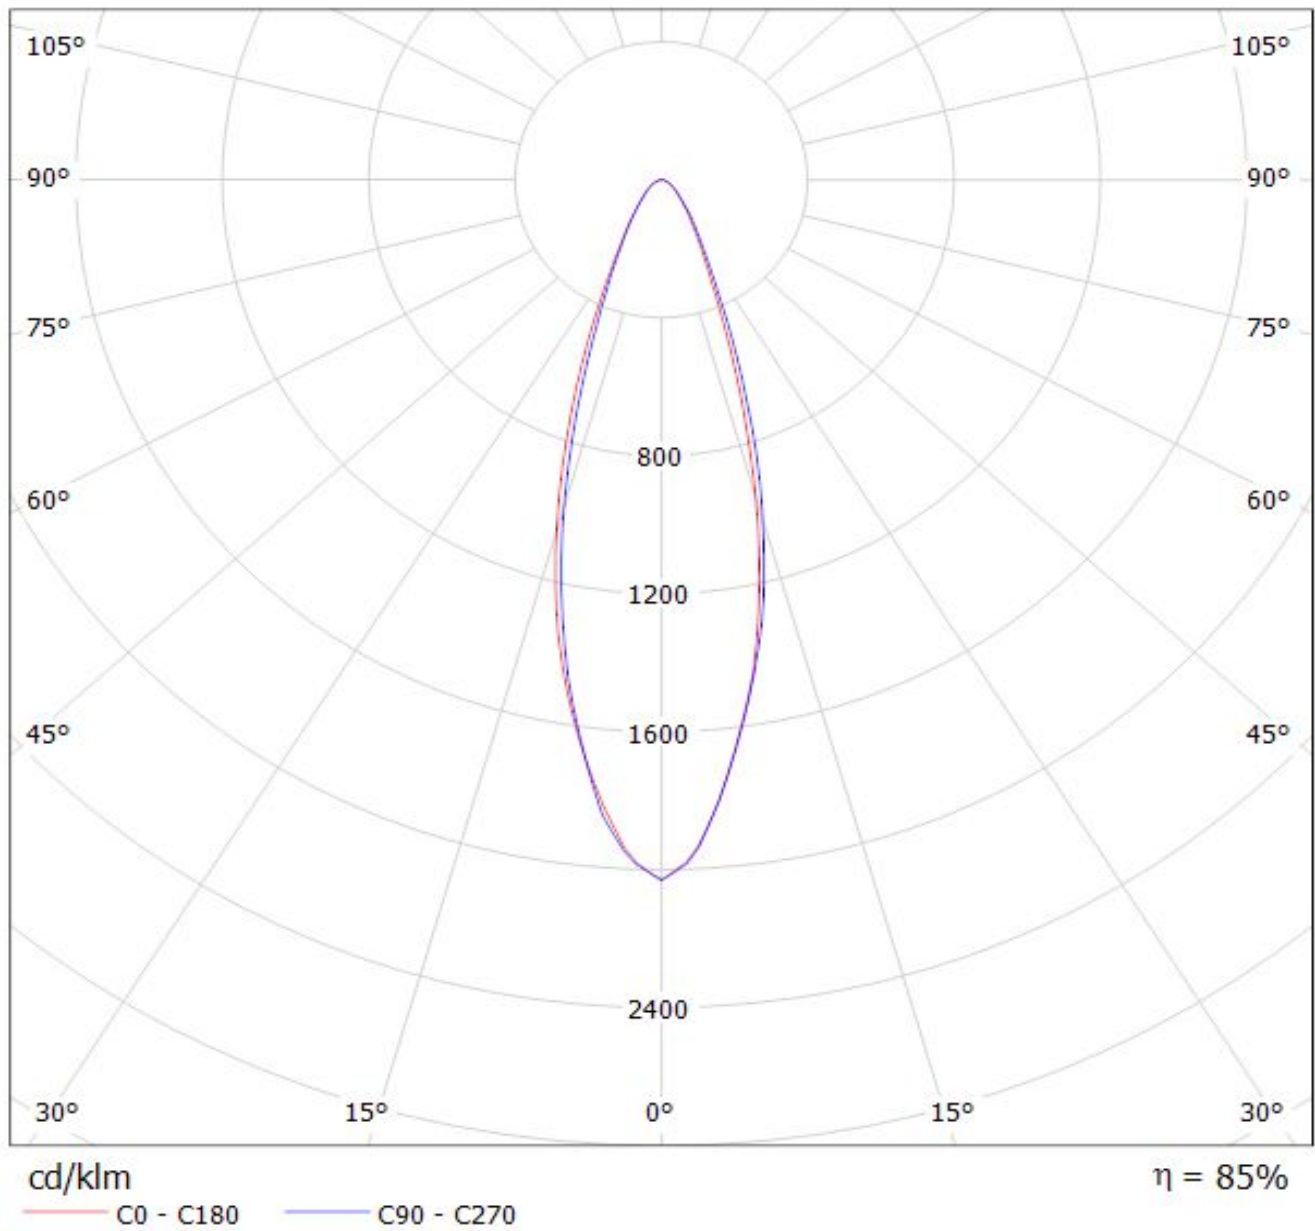

Luminaire: LEDiL C13485_ANNA-40-7-W_(XP-G2)
Lamps: 1 x CREE XP-G2 697lm@250mA

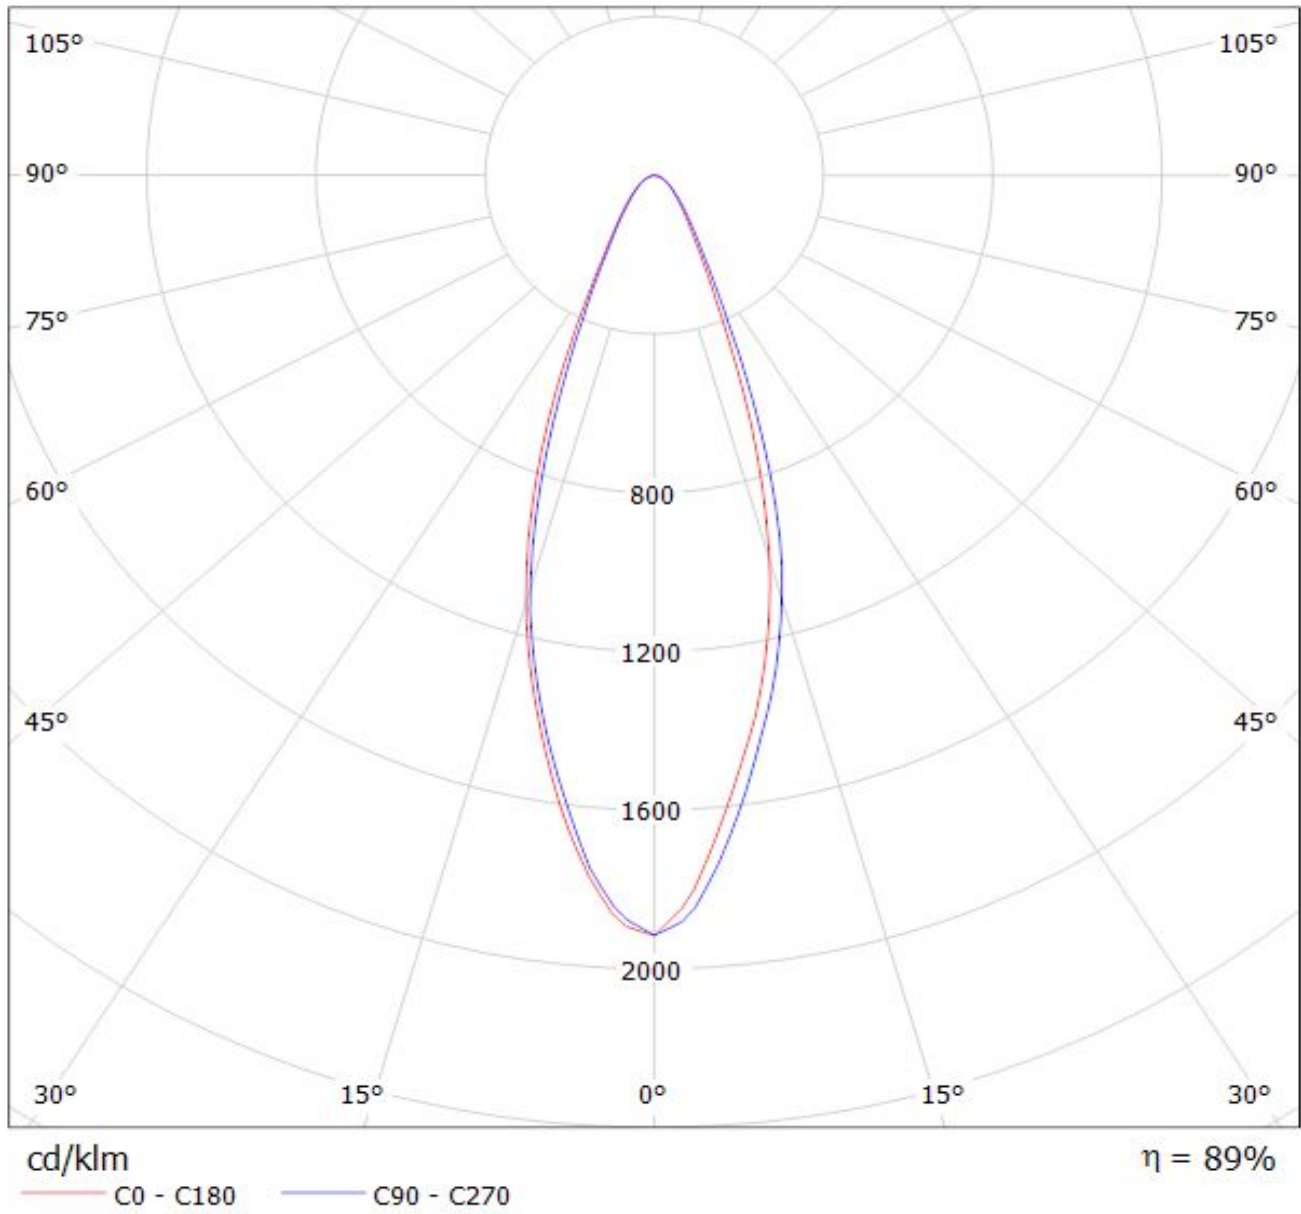

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.