Non-Stripping Multi-Connection Wire Connector multicomp







Features:

- No need to remove wire insulation
- No need to splice the wires
- No need for taping
- Water and dust resistant (IP 33)
- Absolutely free from electric shock
- As easy as 1-2-3 operation
- Accommodate all kinds of electric wires

Technical Specification:

mm² 0.75 ~ (0.2 ~ 0.5) AWG (19 ~ 17) ~ (24 ~ 20) Connection Method Caged wire clamps without stripping & splicing Number of wire 1 or 2 Connection Method Auto strip and connection in connector Wire type Solid and/or Stranded Waterproof status(IP) IP 33 Measured voltage EN(V) 400 Connector type T Type Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3 HS code 853690		1	
Connection MethodCaged wire clamps without stripping & splicingNumber of wire1 or 2Connection MethodAuto strip and connection in connectorWire typeSolid and/or StrandedWaterproof status(IP)IP 33Measured voltage EN(V)400Connector typeT TypeMeasured shock voltage (kV)1.8Connected Loss (Ohm)0.0018Maximum Current (A)3Tensile strength (NT)35Weight (g)0.9ColourGreyHeight (a:mm)5.5Width (b:mm)5.5Width (T-type) (d:mm)11Depth (c:mm)22Strip length from (mm)5Strip length to (mm)5Connection points4Metal thickness0.3	mm ²	0.75 ~ (0.2 ~ 0.5)	
Number of wire 1 or 2 Connection Method Auto strip and connection in connector Wire type Solid and/or Stranded Waterproof status(IP) IP 33 Measured voltage EN(V) 400 Connector type T Type Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	AWG	(19 ~ 17) ~ (24 ~ 20)	
Connection Method Auto strip and connection in connector Wire type Solid and/or Stranded Waterproof status(IP) IP 33 Measured voltage EN(V) Connector type T Type Measured shock voltage (kV) Connected Loss (Ohm) Maximum Current (A) Tensile strength (NT) Weight (g) Colour Grey Height (a : mm) Width (b : mm) Depth (c : mm) Strip length from (mm) Connection points Auto strip and connection in connector Solid and/or Stranded Solid and/or Stranded Auto strip and connection in connector Solid and/or Stranded Auto strip and connection in connector Solid and/or Stranded 400 Connection points Auto Auto strip and connection in connector Solid and/or Stranded 400 Connection in connecti	Connection Method	Caged wire clamps without stripping & splicing	
Wire type Solid and/or Stranded Waterproof status(IP) IP 33 Measured voltage EN(V) 400 Connector type T Type Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Number of wire	1 or 2	
Waterproof status(IP) IP 33 Measured voltage EN(V) 400 Connector type T Type Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Connection Method	Auto strip and connection in connector	
Measured voltage EN(V) 400 Connector type T Type Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Wire type	Solid and/or Stranded	
Connector type T Type Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Waterproof status(IP)	IP 33	
Measured shock voltage (kV) 1.8 Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Measured voltage EN(V)	400	
Connected Loss (Ohm) 0.0018 Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Connector type	T Type	
Maximum Current (A) 3 Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Measured shock voltage (kV)	1.8	
Tensile strength (NT) 35 Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Connected Loss (Ohm)	0.0018	
Weight (g) 0.9 Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Maximum Current (A)	3	
Colour Grey Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Tensile strength (NT)	35	
Height (a : mm) 5.5 Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Weight (g)	0.9	
Width (b : mm) 5.5 Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Colour	Grey	
Width (T-type) (d : mm) 11 Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Height (a : mm)	5.5	
Depth (c : mm) 22 Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Width (b : mm)	5.5	
Strip length from (mm) 5 Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Width (T-type) (d : mm)	11	
Strip length to (mm) 5 Connection points 4 Metal thickness 0.3	Depth (c : mm)	22	
Connection points 4 Metal thickness 0.3	Strip length from (mm)	5	
Metal thickness 0.3	Strip length to (mm)	5	
	Connection points	4	
HS code 853690	Metal thickness	0.3	
	HS code	853690	





Non-Stripping Multi-Connection Wire Connector **multicomp**




Connection Diagram

Product	T-21	
mm ²	0.75 ~ (0.2 ~ 0.5)	
Wire Type	Solid or Stranded	
Number of Wire	1 : 1 Connection	
Picture		
Diagram	0.2-0.5	










Dimensions: Millimetres

Non-Stripping Multi-Connection Wire Connector multicomp



Assembly Instructions:

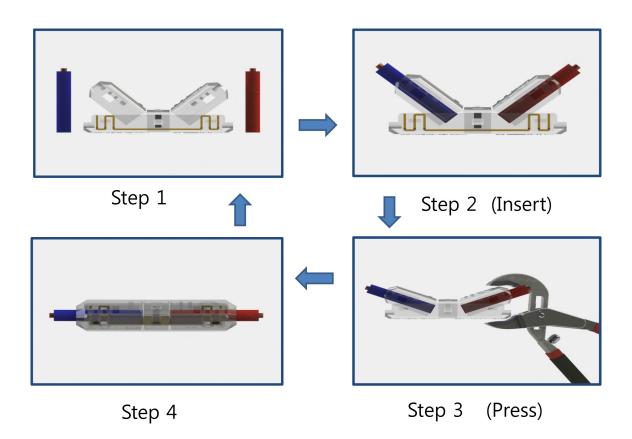

Part Number Table

Description	Part Number
Non-Stripping, Multi-Connection Wire Connector	MCT0021141S

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

