
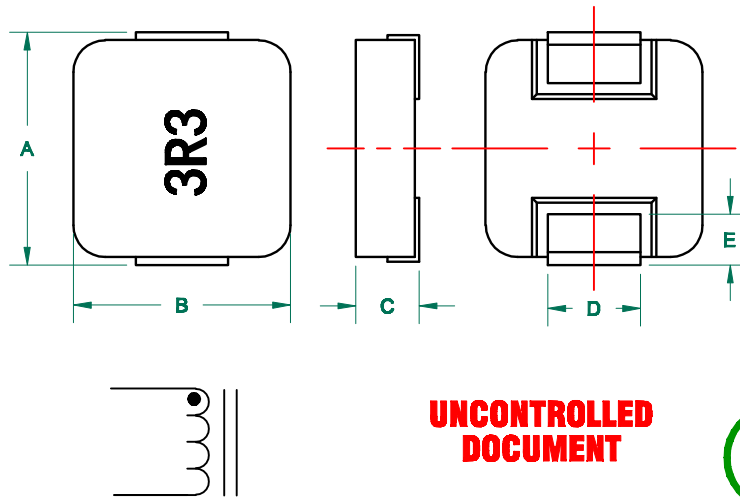


MGV06033R3M-10


PHYSICAL DIMENSIONS:

A	7.30	±	0.50
B	6.70	±	0.30
C	3.00	±	0.30
D	2.90	±	0.30
E	1.60	±	0.50

LAND PATTERNS FOR REFLOW SOLDERING

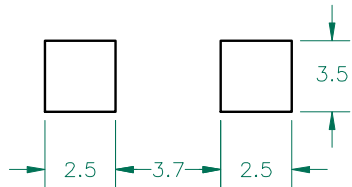

UNCONTROLLED DOCUMENT

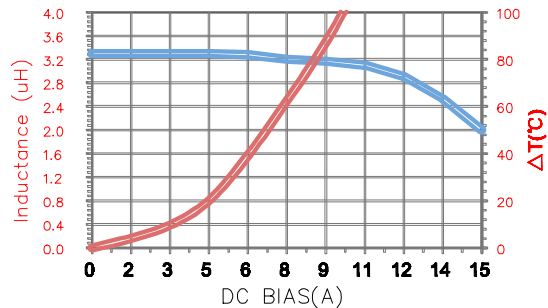

ELECTRICAL SPECIFICATION @ 25°C

	Min	Nom	Max
INDUCTANCE (uH) L @ 100 KHz/0.25V ± 20%	2.64	3.3	3.96
DCR (Ω)			0.030

Saturation Current ³ Isat (A)	13.50
Temperature Rise Current ⁴ Irms (A)	6.00

NOTES: UNLESS OTHERWISE SPECIFIED

- COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- OPERATION TEMPERATURE RANGE:
-40°C~+125°C (INCLUDING SELF-HEATING) .
- DEFINITION OF SATURATION CURRENT (ISAT): DC CURRENT AT WHICH THE INDUCTANCE DROPS ≤25% FROM ITS VALUE WITHOUT CURRENT (Ta=25±5°C).
- DEFINITION OF TEMPERATURE RISE CURRENT (IRMS): DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤40°C) FROM 25°C AMBIENT.

DIMENSIONS ARE IN mm.				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.							
F	CHANGE NOTE 2.3.4	06/24/12	QIU								
E	REVISE DIMENSIONS AND ADD CURVE	06/27/12	QIU								
D	CORRECT MARKING AND DIMENSION	03/21/12	QIU								
C	C CHANGE FROM 3	03/16/12	QIU								
B	CHG I AMENSION AND ADD NOTE 2&3	02/21/12	QIU								
PROJECT/PART NUMBER:				MGV06033R3M-10		REV	F	PART TYPE:	POWER INDUCTOR	DRAWN BY:	QIU
DATE:				12/19/11		SCALE:	NTS	SHEET:			
ORIGINAL DRAFT				12/19/11		CAD #		TOOL #			
DESCRIPTION				DATE		INT		MGV06033R3M-10-F			
								2 of 2			