



## MULTILAYER CERAMIC CHIP CAPACITORS

### **CGA Series Automotive Grade Soft Termination**



**Type:**

**CGA3 [EIA CC0603]  
CGA4 [EIA CC0805]  
CGA5 [EIA CC1206]  
CGA6 [EIA CC1210]  
CGA7 [EIA CC1808]  
CGA8 [EIA CC1812]  
CGA9 [EIA CC2220]**

**Issue date:  
Sep 2014**



## REMINDERS

Please read before using this product

### SAFETY REMINDERS



## REMINDERS

1. If you intend to use a product listed in this catalog for a purpose that may cause loss of life or other damage, you must contact our company's sales window.
2. We may modify products or discontinue production of a product listed in this catalog without prior notification.
3. We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
4. If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
5. Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
6. We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
7. This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice: Effective January 2013, TDK will use a new catalog number which adds product thickness and packaging specification detail. This new catalog number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders. Please be aware the last five digits of the catalog number will differ from the item description (internal control number) on the product label. Contact your local TDK Sales representative for more information.


(Example)

Catalog Issued date	Catalog Number	Item Description (On Delivery Label)
Prior to January 2013	C1608C0G1E103J	C1608C0G1E103JT000N
January 2013 and Later	C1608C0G1E103J080AA	C1608C0G1E103JT000N



## CGA Series Soft Termination

Type: CGA3 [EIA CC0603], CGA4 [EIA CC0805], CGA5 [EIA CC1206], CGA6 [EIA CC1210], CGA7 [EIA CC1808], CGA8 [EIA CC1812], CGA9 [EIA CC2220]

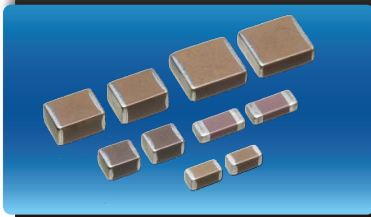


### Features




- Improved board bending resistance, drop impact resistance, thermal shock resistance, and heat cycle properties.
- Conductive resin absorb external stress to protect solder joint parts and capacitor body.
- Compliance with the RoHS Directive.
- AEC-Q200 compliant.

#### Standard Product



#### Soft Termination




### Applications



- Switching power supply
- Telecom base station
- Electronic circuits mounted on alumina substrate
- SMT application which requires bending robustness in which solder joint reliability is problematic

### Shape & Dimensions



L	Body Length
W	Body Width
T	Body Height
B	Terminal Width
G	Terminal Spacing



### Catalog Number Construction

**CGA • 6 • P • 3 • X7S • 1H • 106 • K • 250 • A • E**

#### Series Name

#### Dimensions L x W (mm)

Code	Length	Width	Terminal
C1608	1.60 + 0.20/-0.10	0.80 + 0.15/-0.10	0.20 min.
C2012	2.00 + 0.45/-0.20	1.25 + 0.25/-0.20	0.20 min.
C3216	3.20 + 0.40/-0.20	1.60 + 0.30/-0.20	0.20 min.
C3225	3.20 + 0.50/-0.40	2.50 ± 0.30	0.20 min.
C4520	4.50 + 0.30/-0.20	2.00 ± 0.15	0.20 min.
C4532	4.50 + 0.50/-0.40	3.20 ± 0.40	0.20 min.
C5750	5.70 + 0.50/-0.40	5.00 ± 0.40	0.20 min.

\*Dimension tolerance are typical values

#### Thickness T Code (mm)

Code	Thickness
E	0.80 mm
F	0.85 mm
H	1.15 mm
J	1.25 mm
K	1.30 mm
L	1.60 mm
M	2.00 mm
N	2.30 mm
P	2.50 mm

#### Voltage Condition for Life Test

Symbol	Condition
1	1 × R.V.
2	2 × R.V.
3	1.5 × R.V.
4	1.2 × R.V.

#### Temperature Characteristics

Temperature Characteristics	Temperature Coefficient or Capacitance Change	Temperature Range	Rated Voltage (DC)	
			Code	Voltage (DC)
C0G	0 ±30ppm/°C	-55 to +125°C	1C	16V
X7R	±15%	-55 to +125°C	1E	25V
X7S	±22%	-55 to +125°C	1V	35V
X7T	+22/-33%	-55 to +125°C	1H	50V
			2A	100V
			2E	250V
			Code	Voltage (DC)
			2W	450V
			2J	630V
			3A	1000V
			3D	2000V
			3F	3000V

#### Nominal Capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

Ex. 0R2 = 0.2pF; 103 = 10,000pF; 105 = 1,000,000pF = 1,000nF = 1µF

#### Capacitance Tolerance

Code	Tolerance
K	± 10%
M	± 20%

#### Nominal Thickness

Code	Thickness
080	0.80 mm
085	0.85 mm
130	1.30 mm
160	1.60 mm
250	2.50 mm

\*See Thickness T Code for complete list

#### Packaging Style

Code	Style
A	178" Reel, 4mm Pitch
K	178" Reel, 8mm Pitch

#### Special Reserved Code

Code	Description
E	Soft Termination



## Capacitance Range Chart

## CGA3(1608) [EIA CC0603]

### Capacitance Range Chart

Temperature Characteristics: X7R ( $\pm 15\%$ )  
Rated Voltage: 50V (1H)

Capacitance (pF)	Code	Tolerance	X7R
			1H (50V)
1,000	102	K: $\pm 10\%$	
10,000	103	M: $\pm 20\%$	
100,000	104		
470,000	474		

Standard Thickness  
 0.80 mm



## Capacitance Range Chart

## CGA4(2012) [EIA CC0805]

### Capacitance Range Chart

Temperature Characteristics: X7R ( $\pm 15\%$ ), X7S ( $\pm 22\%$ ), X7T ( $+22/-33\%$ )  
Rated Voltage: 450V (2W), 250V (2E), 100V (2A), 50V (1H), 35V (1V), 16V (1C)

Capacitance (pF)	Code	Tolerance	X7R					X7S	X7T	
			2E (250V)	2A (100V)	1H (50V)	1V (35V)	1C (16V)	2A (100V)	2W (450V)	2E (250V)
10,000	103	K: $\pm 10\%$								
22,000	223	M: $\pm 20\%$								
47,000	473									
100,000	104									
220,000	224									
470,000	474									
1,000,000	105									
2,200,000	225									
4,700,000	475									

Standard Thickness  
 0.85 mm  
 1.25 mm



## Capacitance Range Chart

## CGA5(3216) [EIA CC1206]

### Capacitance Range Chart

Temperature Characteristics: X7R ( $\pm 15\%$ ), X7S ( $\pm 22\%$ ), X7T ( $+22/-33\%$ )  
Rated Voltage: 2000V(3D), 1000V(3A), 630V (2J), 450V (2W), 250V (2E), 100V (2A), 50V (1H), 35V (1V), 25V (1E)

Capacitance (pF)	Code	Tolerance	X7R						X7S			X7T		
			2J (630V)	2E (250V)	2A (100V)	1H (50V)	1V (35V)	1E (25V)	3D (2000V)	3A (1000V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)
470	471	K: $\pm 10\%$												
1,000	102	M: $\pm 20\%$												
10,000	103													
22,000	223													
47,000	473													
100,000	104													
220,000	224													
470,000	474													
1,000,000	105													
2,200,000	225													
4,700,000	475													
10,000,000	106													

Standard Thickness 0.85 mm 1.15 mm 1.30 mm 1.60 mm

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



## Capacitance Range Chart

## CGA6(3225) [EIA CC1210]

### Capacitance Range Chart

Temperature Characteristics: X7R ( $\pm 15\%$ ), X7S ( $\pm 22\%$ ), X7T ( $+22/-33\%$ )  
 Rated Voltage: 630V (2J), 450V (2W), 250V (2E), 100V (2A), 50V (1H)

Capacitance (pF)	Code	Tolerance	X7R			X7S		X7T	
			2J (630V)	2E (250V)	2A (100V)	2A (100V)	1H (50V)	2J (630V)	2W (450V)
47,000	473	K: $\pm 10\%$ M: $\pm 20\%$	█						
100,000	104			█				█	
220,000	224								█
2,200,000	225					█			
4,700,000	475						█	█	
10,000,000	106							█	█

Standard Thickness  
 █ 1.60 mm  
 █ 2.00 mm  
 █ 2.30 mm  
 █ 2.50 mm



## Capacitance Range Chart

## CGA7(4520) [EIA CC1808]

### Capacitance Range Chart

Temperature Characteristics: X7R ( $\pm 15\%$ )  
 Rated Voltage: 2000V (3D)

Capacitance (pF)	Code	Tolerance	X7R
			3D (2000V)
1,000	102	K: $\pm 10\%$ M: $\pm 20\%$	█

Standard Thickness  
 █ 1.30 mm



## Capacitance Range Chart

## CGA8(4532) [EIA CC1812]

### Capacitance Range Chart

Temperature Characteristics: C0G ( $0 \pm 30$  ppm/ $^{\circ}\text{C}$ ), X7R ( $\pm 15\%$ ), X7S ( $\pm 22\%$ ), X7T ( $+22/-33\%$ )  
 Rated Voltage: 3000V (3F), 2000V (3D), 1000V (3A), 630V (2J), 450V (2W), 250V (2E)

Capacitance (pF)	Code	Tolerance	C0G	X7R			X7S		X7T		
			3F (3000V)	3D (2000V)	2E (250V)	3A (1000V)	2J (630V)	2W (450V)	2E (250V)		
330	331	K: $\pm 10\%$ M: $\pm 20\%$	█								
2,200	222			█							
10,000	103						█				
220,000	224							█			
470,000	474					█			█		
1,000,000	105									█	

Standard Thickness  
 █ 1.30 mm  
 █ 1.60 mm  
 █ 2.00 mm  
 █ 2.30 mm  
 █ 2.50 mm



## Capacitance Range Chart

## CGA9(5750) [EIA CC2220]

### Capacitance Range Chart

Temperature Characteristics: X7R ( $\pm 15\%$ ), X7S ( $\pm 22\%$ ), X7T ( $+22/-33\%$ )  
 Rated Voltage: 2000V(3D), 630V (2J), 450V (2W), 250V (2E), 100V (2A)

Capacitance (pF)	Code	Tolerance	X7R		X7S		X7T		
			2E (250V)	3D (2000V)	2A (100V)	2J (630V)	2W (450V)	2E (250V)	
10,000	103	K: $\pm 10\%$ M: $\pm 20\%$		█					
470,000	474					█			
1,000,000	105			█				█	
2,200,000	225								█
10,000,000	106								█
						█			

Standard Thickness  
 █ 2.30 mm  
 █ 2.50 mm

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



## Capacitance Range Table

### Class 1 (Temperature Compensating)

Temperature Characteristics: C0G (-55 to 125°C, 0±30 ppm/°C)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number
				Rated Voltage Edc: 3000V
330 pF	4532	2.50 ± 0.20	± 10%	CGA8P1C0G3F331K250KE

### Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number				
				Rated Voltage Edc: 2000V	Rated Voltage Edc: 630V	Rated Voltage Edc: 250V	Rated Voltage Edc: 100V	Rated Voltage Edc: 50V
1 nF	1608	0.80 +0.15/-0.1	± 10%					CGA3E2X7R1H102K080AE
			± 20%					CGA3E2X7R1H102M080AE
	4520	1.30 ± 0.15	± 10%	CGA7K1X7R3D102K130KE				
			± 20%	CGA7K1X7R3D102M130KE				
2.2nF	4532	1.30 ± 0.15	± 10%	CGA8K1X7R3D222K130KE				
			± 20%	CGA8K1X7R3D222M130KE				
10 nF	1608	0.80 +0.15/-0.1	± 10%					CGA3E2X7R1H103K080AE
			± 20%					CGA3E2X7R1H103M080AE
	2012	1.25 +0.25/-0.20	± 10%		CGA4J3X7R2E103K125AE			
			± 20%		CGA4J3X7R2E103M125AE			
	3216	1.15 ± 0.15	± 10%		CGA5H4X7R2J103K115AE			
			± 20%		CGA5H4X7R2J103M115AE			
22 nF	2012	1.25 +0.25/-0.20	± 10%			CGA4J3X7R2E223K125AE		
			± 20%			CGA4J3X7R2E223M125AE		
	3216	1.30 ± 0.20	± 10%	CGA5K4X7R2J223K130AE				
			± 20%	CGA5K4X7R2J223M130AE				
47 nF	3225	2.00 +0.30/-0.20	± 10%		CGA6M4X7R2J473K200AE			
			± 20%		CGA6M4X7R2J473M200AE			
100 nF	1608	0.80 +0.15/-0.1	± 10%					CGA3E2X7R1H104K080AE
			± 20%					CGA3E2X7R1H104M080AE
	2012	1.25 +0.25/-0.20	± 10%			CGA4J2X7R2A104K125AE	CGA4J2X7R1H104K125AE	
			± 20%			CGA4J2X7R2A104M125AE	CGA4J2X7R1H104M125AE	
	3216	1.60 +0.30/-0.20	± 10%		CGA5L3X7R2E104K160AE	CGA5L2X7R2A104K160AE		
			± 20%		CGA5L3X7R2E104M160AE	CGA5L2X7R2A104M160AE		
	3225	2.00 +0.30/-0.20	± 10%		CGA6M3X7R2E104K200AE			
			± 20%		CGA6M3X7R2E104M200AE			
220 nF	3225	2.00 +0.30/-0.20	± 10%		CGA6M3X7R2E224K200AE			
			± 20%		CGA6M3X7R2E224M200AE			
470 nF	1608	0.80 +0.15/-0.1	± 10%					CGA3E3X7R1H474K080AE
			± 20%					CGA3E3X7R1H474M080AE
	2012	1.25 +0.25/-0.20	± 10%					CGA4J3X7R1H474K125AE
			± 20%					CGA4J3X7R1H474M125AE
	3216	1.60 +0.30/-0.20	± 10%			CGA5L2X7R2A474K160AE		
			± 20%			CGA5L2X7R2A474M160AE		
	4532	2.30 +0.30/-0.20	± 10%		CGA8N3X7R2E474K230KE			
			± 20%		CGA8N3X7R2E474M230KE			
1 µF	2012	1.25 +0.25/-0.20	± 10%					CGA4J3X7R1H105K125AE
			± 20%					CGA4J3X7R1H105M125AE
	3216	1.60 +0.30/-0.20	± 10%			CGA5L2X7R2A105K160AE	CGA5L3X7R1H105K160AE	
			± 20%			CGA5L2X7R2A105M160AE	CGA5L3X7R1H105M160AE	
	5750	2.30 +0.30/-0.20	± 10%		CGA9N3X7R2E105K230KE			
			± 20%		CGA9N3X7R2E105M230KE			
2.2 µF	2012	1.25 +0.25/-0.20	± 10%					CGA4J3X7R1H225K125AE
			± 20%					CGA4J3X7R1H225M125AE
	3216	1.60 +0.30/-0.20	± 10%					CGA5L3X7R1H225K160AE
			± 20%					CGA5L3X7R1H225M160AE
	3225	2.30 +0.30/-0.20	± 10%			CGA6N3X7R2A225K230AE		
			± 20%			CGA6N3X7R2A225M230AE		
4.7 µF	3216	1.60 +0.30/-0.20	± 10%					CGA5L3X7R1H475K160AE
			± 20%					CGA5L3X7R1H475M160AE

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



## Capacitance Range Table

### Class 2 (Temperature Stable)

Temperature Characteristics: X7R (-55 to +125°C, ±15%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number		
				Rated Voltage Edc: 35V	Rated Voltage Edc: 25V	Rated Voltage Edc: 16V
2.2 µF	2012	1.25 +0.25/-0.20	± 10%	CGA4J1X7R1V225K125AE		
			± 20%	CGA4J1X7R1V225M125AE		
4.7 µF	2012	1.25 +0.25/-0.20	± 10%	CGA4J1X7R1V475K125AE		CGA4J3X7R1C475K125AE
			± 20%	CGA4J1X7R1V475M125AE		CGA4J3X7R1C475M125AE
	3216	1.60 +0.30/-0.20	± 10%	CGA5L1X7R1V475K160AE		
			± 20%	CGA5L1X7R1V475M160AE		
10 µF	3216	1.60 +0.30/-0.20	± 10%	CGA5L1X7R1V106K160AE	CGA5L1X7R1E106K160AE	
			± 20%	CGA5L1X7R1V106M160AE	CGA5L1X7R1E106M160AE	

### Class 2 (Temperature Stable)

Temperature Characteristics: X7S (-55 to +125°C, ±22%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number			
				Rated Voltage Edc: 2000V	Rated Voltage Edc: 1000V	Rated Voltage Edc: 100V	Rated Voltage Edc: 50V
470 pF	3216	1.30 ± 0.20	± 10%	CGA5K1X7S3D471K130AE			
			± 20%	CGA5K1X7S3D471M130AE			
1 nF	3216	0.85 ± 0.15	± 10%		CGA5F1X7S3A102K085AE		
			± 20%		CGA5F1X7S3A102M085AE		
10nF	4532	1.60 +0.30/-0.20	± 10%		CGA8L1X7S3A103K160KE		
			± 20%		CGA8L1X7S3A103M160KE		
	5750	2.50 ± 0.30	± 10%	CGA9P1X7S3D103K250KE			
			± 20%	CGA9P1X7S3D103M250KE			
220 nF	2012	0.85 ± 0.15	± 10%			CGA4F3X7S2A224K085AE	
			± 20%			CGA4F3X7S2A224M085AE	
470 nF	2012	1.25 +0.25/-0.20	± 10%			CGA4J3X7S2A474K125AE	
			± 20%			CGA4J3X7S2A474M125AE	
1 µF	2012	1.25 +0.25/-0.20	± 10%			CGA4J3X7S2A105K125AE	
			± 20%			CGA4J3X7S2A105M125AE	
2.2 µF	3216	1.60 +0.30/-0.20	± 10%			CGA5L3X7S2A225K160AE	
			± 20%			CGA5L3X7S2A225M160AE	
4.7 µF	3225	2.00 +0.30/-0.20	± 10%			CGA6M3X7S2A475K200AE	
			± 20%			CGA6M3X7S2A475M200AE	
	3225	2.30 +0.30/-0.20	± 10%				CGA6N3X7S1H475K230AE
			± 20%				CGA6N3X7S1H475M230AE
10 µF	3225	2.50 ± 0.30	± 10%				CGA6P3X7S1H106K250AE
			± 20%				CGA6P3X7S1H106M250AE
	5750	2.30 +0.30/-0.20	± 10%			CGA9N3X7S2A106K230KE	
			± 20%			CGA9N3X7S2A106M230KE	

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.



## Capacitance Range Table

### Class 2 (Temperature Stable)

Temperature Characteristics: X7T (-55 to +125°C, +22/-33%)

Capacitance	Size	Thickness (mm)	Capacitance Tolerance	Catalog Number		
				Rated Voltage Edc: 630V	Rated Voltage Edc: 450V	Rated Voltage Edc: 250V
10 nF	2012	0.85 ± 0.15	± 10%	CGA4F4X7T2W103K085AE		
			± 20%	CGA4F4X7T2W103M085AE		
22 nF	2012	1.25 +0.25/-0.20	± 10%	CGA4J4X7T2W223K125AE		
			± 20%	CGA4J4X7T2W223M125AE		
47 nF	2012	1.25 +0.25/-0.20	± 10%	CGA4J4X7T2W473K125AE	CGA4J3X7T2E473K125AE	
			± 20%	CGA4J4X7T2W473M125AE	CGA4J3X7T2E473M125AE	
	3216	1.60 +0.30/-0.20	± 10%	CGA5L1X7T2J473K160AE		
			± 20%	CGA5L1X7T2J473M160AE		
2012	1.25 +0.25/-0.20	± 10%	CGA4J3X7T2E104K125AE			
		± 20%	CGA4J3X7T2E104M125AE			
100 nF	3216	1.60 +0.30/-0.20	± 10%	CGA5L4X7T2W104K160AE		
			± 20%	CGA5L4X7T2W104M160AE		
	3225	1.60 +0.30/-0.20	± 10%	CGA6L1X7T2J104K160AE		
			± 20%	CGA6L1X7T2J104M160AE		
3216	1.60 +0.30/-0.20	± 10%	CGA5L3X7T2E224K160AE			
		± 20%	CGA5L3X7T2E224M160AE			
220 nF	3225	2.00 +0.30/-0.20	± 10%	CGA6M4X7T2W224K200AE		
			± 20%	CGA6M4X7T2W224M200AE		
	4532	2.00 +0.30/-0.20	± 10%	CGA8M1X7T2J224K200KE		
			± 20%	CGA8M1X7T2J224M200KE		
470 nF	4532	2.30 +0.30/-0.20	± 10%	CGA8N4X7T2W474K230KE		
			± 20%	CGA8N4X7T2W474M230KE		
	5750	2.50 ± 0.30	± 10%	CGA9P1X7T2J474K250KE		
			± 20%	CGA9P1X7T2J474M250KE		
1 µF	4532	2.50 ± 0.30	± 10%	CGA8P3X7T2E105K250KE		
			± 20%	CGA8P3X7T2E105M250KE		
5750	2.50 ± 0.30	± 10%	CGA9P4X7T2W105K250KE			
		± 20%	CGA9P4X7T2W105M250KE			
2.2 µF	5750	2.50 ± 0.30	± 10%	CGA9P3X7T2E225K250KE		
			± 20%	CGA9P3X7T2E225M250KE		

TDK provides Soft Termination on the most commonly used MLCC sizes and capacitance values. Soft Termination offers an external electrode design that differs from the standard electrode design, and this design may be able to be applied to capacitance values beyond those listed in the catalog. Please contact TDK if your specific product needs are not listed and we will consider adding it to the product offering.