

ITT Cannon is the foremost manufacturer of MS and MS type connectors with the widest range of connector styles, sizes and variations in the industry. These connectors utilize the finest materials, which, along with precision manufacturing and rigid quality control, assure ITT Cannon customers of the finest quality connectors.

These circular connectors were originally designed for aircraft, but are now widely used in many other fields. They are particularly suitable for commercial applications requiring low cost and high reliability.



ENVIRONMENTAL RESISTANT MS-E, MS-F, MS-R AND F80 (Solder/Crimp Termination)

MS-E, MS-F and MS-R are similar to MS-A and MS-B connectors but have resilient insulators and wire sealing grommets for extreme environmental conditions and high altitude sealing. MS-E's and MS-F's have a mechanical cable clamp; the MS-R has a shorter, lighter weight endbell without the cable clamp. Both the MS-F and MS-R have O rings to supplement the interfacial seal. Shells are aluminum alloy. Contacts are silver plated copper alloy. The F80 modification (crimp contact termination) is available in E, R, F and BFR styles with resilient insulators.

POTTING ER CONNECTORS (Solder Contact Termination)

These lightweight potting connectors provide resistance to salt water, fuels, etc., and will withstand the effects of high vibration. 3100 and 3106 connectors with plastic potting cups and resilient inserts meet the requirements of MS3103 and MS25183. Contacts are silver plated copper or brass. ER insulators are resilient; shells are aluminum alloy. A 90° plug (3108ER) is also available.



ACCESSORIES

Accessories to fit MS connectors include junction shells, protective caps, dummy or stowage receptacles, cable clamps, telescoping bushings.

How to Order

In the latest revision of MIL-C-5015, a new class of environment-resistant connectors was added. This new class F connector supersedes the previous class E connector. The MS3106F is identical to the MS3106E except that the MS3106F has an "O" ring under the coupling nut. The class E will still be available upon request for existing programs, and upon ordering will also bear the E nomenclature on the shell.

MS-F and MS-R connectors are designed to operate in the extreme environmental conditions of high altitude flight and must be completely sealed to withstand moisture, condensation, vibration, corona and flashover caused by high altitude environments. They have resilient grommet with internal restrictions in the wire cavities which act as O rings around the wires. This allows the wires to slide thru the grommet with a minimum of friction, yet when the ferrule is seated and the endbell tightened it provides a perfect wire seal thru a wide variety of wire diameters. This seal at the rear, plus the interfacial seal at the front, effects a completely environment-resistant assembly when the plug is mated to an F or R receptacle. Sockets are of the closed-entry type.

The temperature range for this connector is -55°C (-67°F) to +125°C (+257°F) and meets the requirements of MIL-C-5015.

The F80 modification (crimp contact termination) is available in resilient insulators in the E, R, F, and BFR styles, creating a large selection of insert assemblies and hardware. Components are identical to the MS-5015 except that the contacts are modified for crimp termination providing and inexpensive crimp contact connector with the proven reliability of and complete interchangeability with the MS-5015 series. See page 187 for assembly instructions. Cable clamps have been integrally designed with the endbell on MS-E and MS-F connectors. Class R is without the cable clamp.

| | | | | | | | |
|----------------------------------|----|------|---|---------|---|---|---|
| PREFIX | CA | 3106 | R | 20 - 27 | P | W | * |
| SHELL STYLE | MS | 3106 | R | 20 - 27 | P | W | - |
| CLASS | | | | | | | |
| SHELL SIZE | | | | | | | |
| CONTACT ARRANGEMENT | | | | | | | |
| CONTACT TYPE | | | | | | | |
| ALTERNATE INSERT POSITION | | | | | | | |

MODIFICATION CODE

PREFIX
MS - Conforms to latest MIL-C-5015 revision
CA - Cannon designation (for any modification)

SHELL STYLE
3100 - Wall mounting receptacle
3101 - Cable connecting plug
3102 - Box mounting receptacle
* 3106 - Straight plug
3108 - 90° angle plug

CLASS
E/F - Environmental with resilient insulators and integral cable clamp.
R - Environmental with resilient insulators and shortened light weight endbell; also additional sealing with O ring seal under coupling nut in styles 3106 and 3108

* When ordering MS3106F to the Cannon part number, designate CA06R. See pages 177 and 181.

SHELL SIZE
Coupling thread diameter in sixteenths of an inch

CONTACT ARRANGEMENTS
See pages 171-174

CONTACT TYPE
P for Pin; S for Socket

ALTERNATE INSERT POSITION
W, X, Y and Z (omit for "Normal")

MODIFICATION CODE
(applies to CA numbers only, not MS)
F80 - Crimp type contacts. See page 187 for assembly instructions.

Performance and Material Specifications

MATERIALS AND FINISHES

| | | |
|------------------|-------------|--|
| Shell | Material | Aluminum alloy |
| | Finish | O.D. Chromate coating over cadmium plating |
| Insulator | Material | Polychloroprene (resilient) |
| Contacts | Material | Brass or copper alloy |
| | Finish | Silver plate |
| | Termination | Tinned solder pot |

WIRING

For class E, R and F connectors, satisfactory moisture sealing will be obtained if AWG and MS wire sizes and insulation outside diameters are governed by this table.

| Contact Size | Wire Size (MIL-W-5086) | Insulation OD Limit (inches) |
|--------------|------------------------|--|
| 16 | 16 thru 20 | .064 (1.63) min. to .130 (3.30) max. |
| 12 | 12 thru 14 | .114 (2.90) min. to .170 (4.32) max. |
| 8 | 8 thru 10 | .164 (4.17) min. to .255 (6.48) max. |
| 4 | 4 thru 6 | .275 (6.98) min. to .370 (9.40) max. |
| 0 | 0 thru 2 | .415 (10.54) min. to .550 (13.97) max. |

ELECTRICAL SERVICE DATA

Test current ratings of contacts and allowable voltage drop under test conditions when assembled as in service are shown below. Maximum total current to be carried per connector is the same as the allowable in wire bundles as specified in MIL-W-5088.

| Contact Size | Test Current (amps) | Potential Drop (millivolts) |
|--------------|---------------------|-----------------------------|
| 16 | 13 | 49 |
| 12 | 23 | 42 |
| 8 | 46 | 26 |
| 4 | 80 | 23 |
| 0 | 150 | 21 |

CONTACTS

Pin and socket contacts are designed to resist severe vibration and repeated connection and disconnection. The average force to either engage or separate pin and socket contacts will not exceed the average values given in the latest revision of MIL-C-5015.

| FORCE In lbs. | Contact Sizes | | | | |
|------------------|---------------|------|-------|-------|-------|
| | 16 | 12 | 8 | 4 | 0 |
| Maximum | 3.00 | 5.00 | 10.00 | 15.00 | 20.00 |
| Average | 2.10 | 3.50 | 7.00 | 10.50 | 14.00 |
| Minimum | .25 | .50 | .75 | 1.00 | 2.00 |

THERMOCOUPLE CONTACTS

Sizes 12 and 16 contacts, machined from matching thermocouple lead wire alloys, can be supplied in ITT Cannon connectors. These thermocouple contacts maintain continuity from thermal-sensor leads thru a bulkhead or other closures in temperature measuring applications.

These contacts for matching lead wires are detailed by the standards of the Instrument Society of America (I.S.A.);

| I.S.A Standards | Material |
|-----------------|-----------------------|
| J and Y | Iron and constantan |
| K | Chromel and alumel |
| T | Copper and constantan |

Since the thermocouple connector applications determines the soldering methods and materials to be used, thermocouple contacts, identified by permanent markings, are normally supplied with untinned solder pots. Thermocouple contacts are supplied only in connectors having resilient insulators.

HIGH POTENTIAL TEST VOLTAGE

MS connectors show no evidence of breakdown when the test voltage given below is applied between the two closest contacts and between the shell and the contacts closest to the shell for a period of one minute.

| MS Service Rating | Test Voltage (RMS) 60 cps | Suggested * Operating Voltages | | Air Spacing Nom. (inches) | Creepage Distance Nom. (inches) |
|-------------------|------------------------------|--------------------------------|----------|---------------------------|---------------------------------|
| | | DC | AC (rms) | | |
| Inst. | 1000 | 250 | 200 | | 1/16 |
| A | 2000 | 700 | 500 | 1/16 | 1/8 |
| D | 2800 | 1250 | 900 | 1/8 | 3/16 |
| E | 3500 | 1750 | 1250 | 3/16 | 1/4 |
| B | 4500 | 2450 | 1750 | 1/4 | 5/16 |
| C | 7000 | 4200 | 3000 | 5/16 | 1 |

* As indicated in previous MS Specification and to be used by designer only as a guide.

High Voltage Cartridges for MS-E and MS-R (HV310*E/R Series)



High voltage conductors as well as power and/or control signal conductors can now be connected simultaneously in standard MS connectors. Previously, MS connectors involved in high voltage circuitry required individual design considerations and could only be ordered as a "special." The new high voltage cartridge allows conversion of a standard connectors to one capable of handling up to 15,000 volts DC (Test Voltage - mated), operating voltage - See level 5,000 VDC or 3,500 VAC. These cartridges are molded of nylon and provide a degree of arc-over protection between adjacent contacts or between a contact and the connector shell. Unmated, each cartridge provides a nylon isolating barrier capable of withstanding up to 10,000 volts DC (or peak).

The contact within the cartridge is a 7.5 amp. size 20, crimp snap-in type with dielectric rear release clip retention. This contact is removable with the plastic CIET20 insertion/extraction tool provided the insulation is .084 (22.45) or less. The contact may be crimped with the standard MS-3191 tool and MS-3191-20A locator and hand inserted into the nylon cartridge. The cartridge body is installed in the connector at the factory.

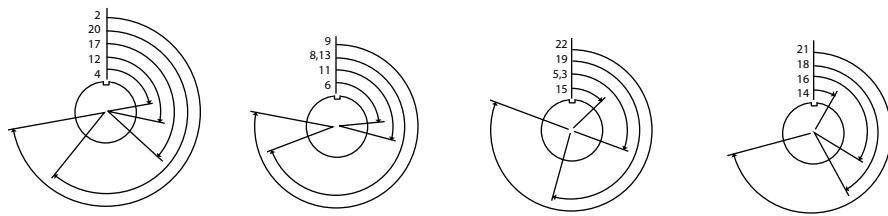
High voltage cartridges now available fit the space normally occupied by a #4 o #8 size contact in an MS-E, MS-R or MS-F type connector.

Over forty-nine contact arrangements are currently available in which these high voltage cartridges may be used. Consult factory for ordering information.

- Standard contact arrangements are adaptable to high voltage applications.
- Eliminates need for a separate high voltage connector.
- Assembly time is reduced.

ITT Cannon Designated Alternate Insert Positions

Not MS approved



NOTE: Front view of pin insulator rotates as shown.

| Shell Size | Contact Arrangement | Wire Size | Service Rating | Available Position | | | | | | |
|------------|---------------------|-----------------|----------------|--------------------|----|----|----|----|----|----|
| | | | | 2 | 3 | 5 | 8 | 12 | 13 | |
| 10SL | 10SLA4 | 5 #20 | A | | | | | | | |
| 12S | 12SA10 | 4 #16 | Inst. | 3 | 5 | 8 | 13 | | | |
| 20 | 20A37 | 4 #8 | D | | | | | | | |
| 24 | 24A24 | 12 #12 | A | 2 | 4 | 9 | 12 | | | |
| 28 | 28A16 | 5 #16 4 #4 | A | 2 | 3 | 5 | 8 | 9 | 13 | |
| | 28A51 | 43 #16 | A | 3 | 4 | 5 | 8 | 9 | 12 | 13 |
| 32 | 32A10 | 54 #16 | A | 2 | 3 | 4 | 5 | 8 | 9 | 12 |
| | 32A47 | 47 #16 | A | 2 | 3 | 4 | 5 | 8 | 9 | 12 |
| 36 | 36A16 | 18 #12 | A | 2 | 3 | 4 | 5 | 8 | 9 | 12 |
| | 36A34 | 52 #16 | A | 2 | 3 | 4 | 5 | 8 | 9 | 12 |
| | 36A46 | 27 #12 | A | 2 | 3 | 4 | 5 | 8 | 9 | 12 |
| | 36A66 | 52 #16 4 #12 | A | 2 | 3 | 5 | 8 | 9 | 13 | 15 |
| 40 | 40A27 | 60 #16 | A | 4 | 14 | 17 | 20 | 22 | | |
| | 40A33 | 7 #8 6 #4 | A | 2 | 3 | 5 | 8 | 13 | | 20 |

Note: For ITT Cannon contact arrangements not listed, consult factory.

| Position | Angle (degrees) |
|----------|-----------------|
| Normal | 0 |
| 2 | 260 |
| 3 | 110 |
| 4 | 80 |
| 5 | use pos. 3 |
| 6 | 85 |
| 8 | 250 |
| 9 | 280 |
| 11 | 105 |
| 12 | 100 |
| 13 | use pos. 8 |
| 14 | 30 |
| 15 | 45 |
| 16 | 120 |
| 17 | 130 |
| 18 | 150 |
| 19 | 195 |
| 20 | 220 |
| 21 | 255 |
| 22 | 290 |
| 23 | 165 |
| 24 | 330 |
| 25 | 235 |
| 26 | 125 |

Contact Arrangements (Face View Pin Insert)

LEGEND

● Resilient only
 ▲ Resilient & Plastic






























φ High Volume Layouts - readily available from Cannon Distributors

| | | | | | | | | | |
|-----------------|-------------------------|---------------------------|----------------------------------|----------------------------|-----------------------------|--|-----------------------------|-------|--------|
| | ● | ● | φ▲ | φ▲ | ● | ● | φ▲ | ● | φ▲ |
| Shell Size | 8S-1 | 10S-2 | 10SL-4 | 10SL-3 | 10SLA4 | 12S-4 | 12-5 | 12S-3 | 12SA10 |
| No. of Contacts | 1 #16 | 1 #16 | 2 #16 | 3 #16 | 5 #20 | 1 #16 | 1 #12 | 2 #16 | 4 #16 |
| Service Rating | A | A | A | A | A | D | A | A | Inst. |
| | ● | φ▲ | φ▲ | φ▲ | φ▲ | ● | ▲ | ● | ● |
| Shell Size | 14S-1 | 14S-7 | 14S-2 | 14S-5 | 14S-6 | 16-12 | 16-11 | 16S-4 | 16-13 |
| No. of Contacts | 3 #16 | 3 #16 | 4 #16 | 5 #16 | 6 #16 | 1 #4 | 2 #12 | 2 #16 | 2 #12 |
| Service Rating | A | A | Inst. | Inst. | Inst. | A | A | D | A |
| | ● | ● | φ▲ | ● | φ▲ | φ▲ | φ▲ | ● | ● |
| Shell Size | 16S-5 | 16S-6 | 16-10 | 16-9 | 16S-8 | 16S-1 | 18-7 | 18-3 | 18-3 |
| No. of Contacts | 3 #16 | 3 #16 | 3 #12 | 2 #16 (B,D) 2 #12 (A,C) | 5 #16 | 7 #16 | 1 #8 | 2 #12 | 2 #12 |
| Service Rating | A | A | A | A | A | A | B | D | |
| | ▲ | ● | ▲ | ● | ● | ● | ● | φ▲ | ▲ |
| Shell Size | 18-5 | 18-22 | 18-4 | 18-10 | 18-13 | 18-15 | 18-11 | 18-12 | 18-12 |
| No. of Contacts | 1 #16(A) 2 #12(B,C) | 3 #16 | 4 #16 | 4 #12 | 3 #12 (B,C,C) 1 #8(A) | 4 #12 (A, C-Iron; B, D-Constantan) | 5 #12 | 6 #16 | |
| Service Rating | D | D | D | A | A | A | A | A | A |
| | φ▲ | φ▲ | φ▲ | ● | ● | ● | ● | ● | ● |
| Shell Size | 18-9 | 18-8 | 18-1 | 18-19 | 20-2 | 20-23 | 20-3 | 20-19 | 20-19 |
| No. of Contacts | 5 #16(B,C,E-G) Inst. | 7 #16(A-G) 1 #12(H) | 10 #16 | 10 #16 | 1 #0 | 2 #8 | 3 #12 | 3 #8 | |
| Service Rating | A | A | A(B,C,F,G) Inst. (all others) | A | D | A | D | A | |
| | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| Shell Size | 20-4 | 20-24 | 20A37 | 20-14 | 20-8 | 20-17 | 20-22 | 20-15 | |
| No. of Contacts | 4 #12 | 2 #16 (A,C) 2 #8 (B,D) | ITT Cannon pos. #8 of 20-4 | 3 #12(C,D,E) 2 #8(A,B) | 4 #16(B,C,E,F) 2 #8(A,D) | 1 #16(F) 5 #12(A-E) | 3 #16(B,D,F) 3 #8(A,C,E) | 7 #12 | |
| Service Rating | D | A | D | A | Inst. | A | A | A | |

Contact Arrangements (Continued)

LEGEND
 ● Resilient only
 ▲ Resilient & Plastic

¢ High Volume Layouts - readily available from Cannon Distributors

| | | | | | | | | |
|-------------------------------|---|---|---|---|--|---|---|---|
| |  |  |  |  |  |  |  |  |
| Shell Size No. of Contacts | 20-7 8 #16 | 20-16 7 #16(A-G) 2 #12(H,I) | 20-18 6 #16(A,C-E,G,H) 3 #12(B,F,I) | 20-33 11 #16 | 20-11 13 #16 | 20-27 14 #16 | 20-29 17 #16 | 22-7 1 #0 |
| Service Rating | A(C-F) D(A,B,G,H) | A | A | A | Inst. | A | A | E |
| |  |  |  |  |  |  |  |  |
| Shell Size No. of Contacts | 22-11 2 #16 | 22-2 3 #8 | 22-6 1 #16(B) 2 #8(A,C) | 22-9 3 #12 | 22-4 2 #12(A,C) 2 #8(B,D) | 22-10 4 #16 | 22-22 4 #8 | 22-12 3 #16(A,C,D) 2 #8(B,E) |
| Service Rating | B | D | D | E | A | E | A | D |
| |  |  |  |  |  |  |  |  |
| Shell Size No. of Contacts | 22-13 1 #16(E) 4 #12(A-D) | 22-5 4 #16(A,C,D,F) 2 #12(B,E) | 22-15 1 #16(D) 5 #12(A-C,E,F) | 22-28 7 #12 | 22-18 8 #16 | 22-23 8 #12 | 22-17 8 #16(A-D,F-J) 1 #12(E) | 22-20 9 #16 |
| Service Rating | A(A-D), D(E) | D | A(A-C,E,F), E(D) | A | A(C-E) D(all others) | D(H) A(all others) | D(A), A(all others) | A |
| |  |  |  |  |  |  |  |  |
| Shell Size No. of Contacts | 22-27 8 #16(A-H) 1 #8(J) | 22-19 14 #16 | 22-14 19 #16 | 24-9 2 #4 | 24-22 4 #8 | 24-12 3 #12(B,D,E) 2 #4(A,C) | 24-2 7 #12 | 24-10 7 #8 |
| Service Rating | D(J), A (all others) | A | A | A | D | A | D | A |
| |  |  |  |  |  |  |  |  |
| Shell Size No. of Contacts | 24-27 7 #16 | 24-6 8 #12 | 24-11 6 #12(A-C,G-I) 3 #8(D-F) | 24-20 9 #16(A-D,G-L) 2 #12(E,F) | 24-19 12 #16 | 24A24 6 #12(B-G) | 24-5 16 #16 | 24-7 14 #16(A-M,O) 2 #12(P,N) |
| Service Rating | E | D(A,G,H) A(all others) | A | D | A | A | A | A |

Contact Arrangements (Continued)

LEGEND
 ● Resilient only
 ▲ Resilient & Plastic

¢ High Volume Layouts - readily available from Cannon Distributors

| | | | | | | | |
|-----------------|--------|------|-------------------------|--|---------------------------------|---------------------------------|------------------------------------|
| | | | | | | | |
| Shell Size | 24-28 | 28-7 | 28-22 | 28-10 | 28-1 | 28A16 | 28-19 |
| No. of Contacts | 24 #16 | 2 #4 | 3 #16(D-F) 3 #4(A-C) | 3 #12(A,F,G) 2 #8(B,E) 2 #4(C,D) | 6 #12(A,B,D-F,H) 3 #8(C,J,G) | 5 #16(A,D-F,J) 4 #4(B,C,G,H) | 6 #16(A-C,H,L,M) 4 #12(E,G,J,K) |
| Service Rating | Inst. | D | D | D(G), A(all others) | D(A,E,J) A(all others) | A | A(C,E,G,J,K,L) B(H,M),D(A,B) |

| | | | | | | | |
|-----------------|----------------------------|-----------------------------|-----------------------------|------------------------|--------|--------------------------------|--------|
| | | | | | | | |
| Shell Size | 28-9 | 28-2 | 28-20 | 28-17 | 28-16 | 28-11 | 28-12 |
| No. of Contacts | 6 #16(A,H-M) 6 #12(B-G) | 12 #16(A,L,N) 2 #12(M,P) | 4 #16(K-N) 10 #12(A-J,P) | 15 #16 | 20 #16 | 18 #16(A-I, N-X) 4 #12(J-M) | 26 #16 |
| Service Rating | D | D | A | A(A-L), B(R) D(M-P) | A | A | A |

| | | | | | | | |
|-----------------|---|--------|--------|-------|--|--------------------|--------------------------|
| | | | | | | | |
| Shell Size | 28-15 | 28-21 | 28A51 | 32-17 | 32-1 | 32-15 | 32-9 |
| No. of Contacts | 35 #16 | 37 #16 | 43 #16 | 4 #4 | 3 #12(A,C,D) 2 #0(B,E) E(A), D(all others) | 6 #12(B,C,D,E,F,H) | 12 #16(C-N) 2 #4(A,B) |
| Service Rating | A For MIL equip design, use 28-21 | A | A | D | D | D | D |

| | | | | | | |
|-----------------|---|--|-----------------------------------|--------|--------|-------------|
| | | | | | | |
| Shell Size | 32-6 | 32-8 | 32-7 | 32A47 | 32A10 | 36-4 |
| No. of Contacts | 16 #16(A-O,S) 2 #12(U,V) 3 #8(P,R,T) 2 #4(W,X) | 24 #16(A-L,T-Z,a-e) 6 #12(M-S) 2 #8(O,R) | 28 #16(A-N,W-Z,a-k) 7 #12(O-V) | 47 #16 | 54 #16 | 3 #0 |
| Service Rating | A | A For new MIL equip. design, use 32-7 | Inst. (A,B,h,j) A(all others) | A | A | A(B,C),C(A) |

















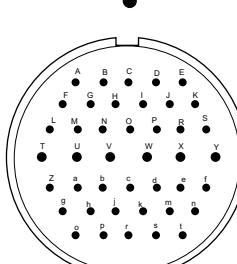
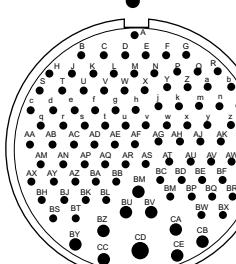
*NOTE: Additional layouts are the same as shown but in unique alternate positions. Please consult the factory.

Contact Arrangements (Continued)

LEGEND
 ● Resilient only
 ▲ Resilient & Plastic

¢ High Volume Layouts - readily available from Cannon Distributors

† Grommet not available. Consult factory for ordering connectors with this arrangement.

| | | | | | |
|---|---|---|---|---|---|
|  |  |  |  |  |  |
| Shell Size No. of Contacts | 36-5 4 #0 | 36-6 4 #4(B,C,E,F) 2 #0(A,D) | 36-14 6 #16(K-N,P,Q) 5 #12(B,D,F,H,J) 5 #8(A,C,E,G,I) | 36A16 18 #12 (B,C,V,J,K,M,N, R, T-Iron; A,D-F,H,L P,S,U-Constanat) | 36A46 27 #12 14 #16(A-G,Z-f) 14 #12(H-N,S-Y) 2 #8(O,R) 1 #4(P) |
| Service Rating | A | A | D | A | A |
|  |  |  |  |  |  |
| Shell Size No. of Contacts | 36-15 35 #16 | 36-7 40 #16(A-Z,a-s) 7 #12(t-z) | 36-8 46 #16(A-X,Z-z) 1 #12(Y) | 36-10 46 #16(A-X,Z-z) 1 #12(Y) | 36A34 52 #16 36A66 52 #16 4 #16(d,e,f,g) |
| Service Rating | D(m), A (all others) | A | A | A | A |
|  |  |  |  | | |
| Shell Size No. of Contacts | 40A33 7 #8(G-N) 6 #4(A-F) | 40-10 16 #16(A,B,E-H,M,N,P Q,V-Y,b,c) 9 #8(C,D,I,L,O,R,U,Z,a) 4 #4(K,J,S,T) | 40A27 60 #16 | 40-56 85 #16 | |
| Service Rating | A | A | A | A | |
|  |  | | | | |
| Shell Size No. of Contacts | 44-1 36 #16(A-S,Z-t) 6 #12(T-Y) | 48-5 90 #16(A-BL,BN-BT,BW,BX) 1 #8(CD) 9 #12(BM,BU,BV,BY-CC,CE) | | | |
| Service Rating | D | A | | | |

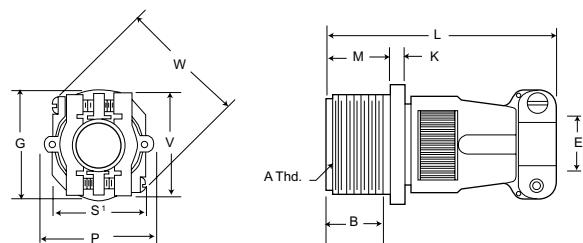
Cable Connecting Plug (Receptacle with no mounting flange)

MS3101E/MS3101F
Integral Cable Clamp

CA3101E/CA3101E


MS3101E cable connecting plugs are used for cable extension requirements, where mounting provisions are unnecessary.

MS3101E plugs mate with 3106, 3107 and 3108 plugs. Note: the D revision of MIL-C-5015 has changed the nomenclature of the 3101 from receptacle to plug.

**MS3101R**

CA3101R

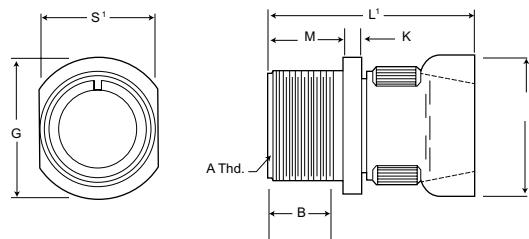MS3101R cable connecting plug is identical in purpose to the MS3101E. The MS3101R features a shorter lightweight endbell and mates with 3106, 3107 and 3108 plugs. Note: The D revision of the MIL-C-5015 specification has changed the nomenclature of the 3101 from receptacle to plug.



| Shell Size | B Min. | E Max. | E Min. | G Max. | K Max. | L Max. | L' Max. | M | P Max. | S' Max. | V Max. | W Max. |
|------------|--------------|---------------|--------------|---------------|-------------|----------------|----------------|---------------------------|---------------|---------------|---------------|---------------|
| | | | | | | | | +.031(.79) -.000(0.00) | | | | |
| 8S | .375 (9.53) | .235 (5.97) | .102 (2.59) | .844 (21.44) | .125 (3.18) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .890 (22.61) | .515 (13.08) | .840 (21.34) | 1.046 (26.57) |
| 10S | .375 (9.53) | .235 (5.97) | .102 (2.59) | .969 (24.61) | .125 (3.18) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .890 (22.61) | .640 (16.26) | .840 (21.34) | 1.046 (26.57) |
| 10SL | .375 (9.53) | .297 (7.54) | .140 (3.56) | 1.062 (26.97) | .125 (3.18) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .970 (24.64) | .640 (16.26) | .900 (22.86) | 1.125 (28.58) |
| 12S | .375 (9.53) | .297 (7.54) | .140 (3.56) | 1.062 (26.97) | .140 (3.56) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .970 (24.64) | .765 (19.43) | .900 (22.86) | 1.125 (28.58) |
| 14S | .375 (9.53) | .422 (10.72) | .195 (4.95) | 1.156 (29.36) | .140 (3.56) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | 1.150 (29.21) | .890 (22.61) | 1.00 (27.94) | 1.343 (34.11) |
| 16S | .375 (9.53) | .547 (13.89) | .255 (6.48) | 1.281 (32.54) | .140 (3.56) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | 1.250 (31.75) | 1.015 (25.78) | 1.200 (30.48) | 1.484 (37.69) |
| 12 | .625 (15.88) | .297 (7.54) | .140 (3.56) | 1.062 (26.97) | .146 (3.71) | 2.625 (66.68) | 2.181 (55.40) | .750 (19.05) | .970 (24.64) | .765 (19.43) | .900 (22.86) | 1.125 (28.58) |
| 14 | .625 (15.88) | .422 (10.72) | .195 (4.95) | 1.156 (29.36) | .146 (3.71) | 2.625 (66.68) | 2.181 (55.40) | .750 (19.05) | 1.150 (29.21) | .890 (22.61) | 1.100 (27.94) | 1.343 (34.11) |
| 16 | .625 (15.88) | .547 (13.89) | .255 (6.48) | 1.281 (32.54) | .146 (3.71) | 2.625 (66.68) | 2.181 (55.40) | .750 (19.05) | 1.250 (31.75) | 1.015 (25.78) | 1.200 (30.48) | 1.484 (37.69) |
| 18 | .625 (15.88) | .610 (15.49) | .285 (7.24) | 1.344 (34.14) | .180 (4.57) | 2.688 (68.28) | 2.281 (55.40) | .750 (19.05) | 1.450 (36.83) | 1.140 (28.96) | 1.300 (33.02) | 1.609 (40.87) |
| 20 | .625 (15.88) | .735 (18.67) | .350 (8.89) | 1.500 (38.10) | .180 (4.57) | 2.750 (69.85) | 2.281 (55.40) | .750 (19.05) | 1.570 (39.88) | 1.265 (32.13) | 1.500 (38.10) | 1.890 (48.01) |
| 22 | .625 (15.88) | .740 (18.80) | .350 (8.89) | 1.625 (41.28) | .180 (4.57) | 2.750 (69.85) | 2.281 (55.40) | .750 (19.05) | 1.570 (39.88) | 1.390 (35.31) | 1.500 (38.10) | 1.890 (48.01) |
| 24 | .625 (15.88) | .922 (23.42) | .468 (11.89) | 1.750 (44.45) | .203 (5.16) | 2.969 (75.44) | 2.281 (55.40) | .812 (20.62) | 1.880 (47.75) | 1.515 (38.48) | 1.740 (44.20) | 2.170 (55.12) |
| 28 | .625 (15.88) | .922 (23.42) | .468 (11.89) | 2.000 (50.80) | .203 (5.16) | 3.031 (76.99) | 2.281 (55.40) | .812 (20.62) | 1.880 (47.75) | 1.765 (44.83) | 1.740 (44.20) | 2.170 (55.12) |
| 32 | .625 (15.88) | 1.235 (31.37) | .664 (15.87) | 2.250 (57.15) | .203 (5.16) | 3.031 (76.99) | 2.322 (58.98) | .875 (22.23) | 2.205 (56.01) | 2.015 (51.18) | 2.075 (52.71) | 2.656 (67.46) |
| 36 | .625 (15.88) | 1.360 (34.54) | .694 (17.63) | 2.500 (63.50) | .203 (5.16) | 3.281 (83.34) | 2.322 (58.98) | .875 (22.23) | 2.400 (60.96) | 2.270 (57.66) | 2.300 (58.42) | 2.922 (74.22) |
| *40 | .625 (15.88) | 1.628 (41.35) | .911 (23.14) | 2.750 (69.85) | .203 (5.16) | 3.560 (89.66)† | 2.427 (61.65)† | .875 (22.23) | 2.840 (72.14) | 2.427 (61.65) | 2.688 (68.28) | - |

†Not to MS specification

*Not Available in MS3101E and MS3101R.

| Shell Size | A Thread | Shell Size | A Thread |
|------------|---------------|------------|-----------------|
| 8S | 1/2-28UNEF-2A | 16 | 1-20UNEF-2A |
| 10S | 5/8-24UNEF-2A | 18 | 1-1/8-18UNEF-2A |
| 10SL | 5/8-24UNEF-2A | 20 | 1-1/4-18UNEF-2A |
| 12S | 3/4-20UNEF-2A | 22 | 1-3/8-18UNEF-2A |
| 14S | 7/8-20UNEF-2A | 24 | 1-1/2-18UNEF-2A |
| 16S | 1-20UNEF-2A | 28 | 1-3/4-18UNS-2A |
| 12 | 3/4-20UNEF-2A | 32 | 2-18UNS-2A |
| 14 | 7/8-20UNEF-2A | 36 | 2-1/4-16UN-2A |
| | | 40 | 2-1/2-16UN-2A |

Performance Specifications - Page 168

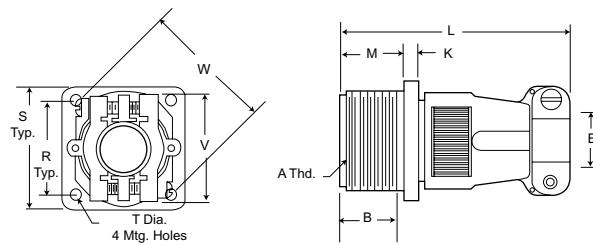
Contact, Sealing Plugs, Assembly Tools - Page

187


Contact Arrangements - Page 171-174

Wall Mounting Receptacle**MS3100E/MS3100F**
Integral Cable Clamp**CA3100E/CA3100E**

MS3100F wall mounting receptacles are used to carry wires thru walls or bulkheads, or to provide a means of disconnection at a bulkhead. MS3100F receptacles mate with 3106 and 3108 plugs. MS3100E is identical to MS3100F and is available upon request. For new equipment, customer should specify MS3100F.

**MS3100R****CA3100R**

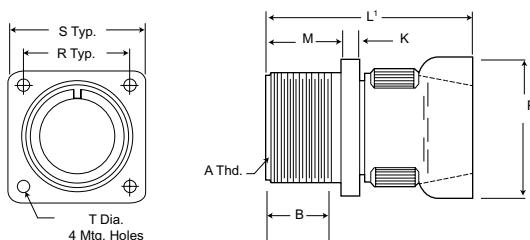The MS3100R receptacle is identical in purpose to the MS3100F. The MS3100R features a shorter light weight endbell and mates with 3106 and 3108 plugs.



| Shell Size | B Min. | E Max. | E Min. | K Max. | L Max. | L' Max. | M +.031 -.000 | P Max. | R +.005 | S +.031 -.005 | T +.010 -.005 | V Max. | W Max. |
|------------|-------------|---------------|--------------|-------------|----------------|----------------|---------------------|---------------|---------------|---------------------|---------------------|---------------|---------------|
| 8S | .375 (9.53) | .235 (5.97) | .102 (2.59) | .125 (3.18) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .890 (22.61) | .594 (15.09) | .875 (22.23) | .120 (3.05) | .840 (21.34) | 1.046 (26.57) |
| 10S | .375 (9.53) | .235 (5.97) | .102 (2.59) | .125 (3.18) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .890 (22.61) | .719 (18.26) | 1.000 (25.40) | .120 (3.05) | .840 (21.34) | 1.046 (26.57) |
| 10SL | .375 (9.53) | .297 (7.54) | .140 (3.56) | .125 (3.18) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .970 (24.64) | .719 (18.26) | 1.000 (25.40) | .120 (3.05) | .900 (22.86) | 1.125 (28.58) |
| 12S | .375 (9.53) | .297 (7.54) | .140 (3.56) | .140 (3.56) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | .970 (24.64) | .812 (20.62) | 1.094 (27.79) | .120 (3.05) | .900 (22.86) | 1.125 (28.58) |
| 14S | .375 (9.53) | .422 (10.72) | .195 (4.95) | .140 (3.56) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | 1.150 (29.21) | .906 (23.01) | 1.188 (30.18) | .120 (3.05) | 1.100 (27.94) | 1.343 (34.11) |
| 16S | .375 (9.53) | .547 (13.89) | .255 (6.48) | .140 (3.56) | 2.250 (57.15) | 1.838 (46.69) | .562 (14.27) | 1.250 (31.75) | .969 (24.61) | 1.281 (32.54) | .120 (3.05) | 1.200 (30.48) | 1.484 (37.69) |
| 12 | .625(15.88) | .297 (7.54) | .140 (3.56) | .146 (3.71) | 2.625 (66.68) | 2.181 (55.40) | .750 (19.05) | .970 (24.64) | .812 (20.62) | 1.094 (27.79) | .120 (3.05) | .900 (22.86) | 1.125 (28.58) |
| 14 | .625(15.88) | .422 (10.72) | .195 (4.95) | .146 (3.71) | 2.625 (66.58) | 2.181 (55.40) | .750 (19.05) | 1.150 (29.21) | .906 (23.01) | 1.188 (30.18) | .120 (3.05) | 1.100 (27.94) | 1.343 (34.11) |
| 16 | .625(15.88) | .547 (13.89) | .255 (6.48) | .146 (3.71) | 2.625 (66.58) | 2.181 (55.40) | .750 (19.05) | 1.250 (31.75) | .969 (24.61) | 1.281 (32.54) | .120 (3.05) | 1.200 (30.48) | 1.484 (37.69) |
| 18 | .625(15.88) | .610 (15.49) | .285 (7.24) | .180 (4.57) | 2.688 (68.28) | 2.281 (55.40) | .750 (19.05) | 1.450 (36.83) | 1.062 (26.97) | 1.375 (34.93) | .120 (3.05) | 1.300 (33.02) | 1.609 (40.87) |
| 20 | .625(15.88) | .735 (18.67) | .350 (8.89) | .180 (4.57) | 2.750 (69.85) | 2.281 (55.40) | .750 (19.05) | 1.570 (39.88) | 1.156 (29.36) | 1.500 (38.10) | .120 (3.05) | 1.500 (38.10) | 1.890 (48.01) |
| 22 | .625(15.88) | .740 (18.80) | .350 (8.89) | .180 (4.57) | 2.750 (69.85) | 2.281 (55.40) | .750 (19.05) | 1.570 (39.88) | 1.250 (31.75) | 1.625 (41.28) | .120 (3.05) | 1.500 (38.10) | 1.890 (48.01) |
| 24 | .625(15.88) | .922 (23.42) | .468 (11.89) | .203 (5.16) | 2.969 (75.44) | 2.281 (55.40) | .812 (20.62) | 1.880 (47.75) | 1.375 (34.93) | 1.750 (44.45) | .147 (3.73) | 1.740 (44.20) | 2.170 (55.12) |
| 28 | .625(15.88) | .922 (23.42) | .468 (11.89) | .203 (5.16) | 3.031 (76.99) | 2.281 (55.40) | .812 (20.62) | 1.880 (47.75) | 1.562 (39.67) | 2.000 (50.80) | .147 (3.73) | 1.740 (44.20) | 2.170 (55.12) |
| 32 | .625(15.88) | 1.235 (31.37) | .664 (15.87) | .203 (5.16) | 3.031 (76.99) | 2.322 (58.98) | .875 (22.23) | 2.205 (56.01) | 1.750 (44.45) | 2.250 (57.15) | .173 (4.39) | 2.075 (52.71) | 2.656 (67.46) |
| 36 | .625(15.88) | 1.360 (34.54) | .694 (17.63) | .203 (5.16) | 3.281 (83.34) | 2.322 (58.98) | .875 (22.23) | 2.400 (60.96) | 1.938 (49.23) | 2.500 (63.50) | .173 (4.39) | 2.300 (58.42) | 2.922 (74.22) |
| *40 | .625(15.88) | 1.628 (41.35) | .911 (23.14) | .203 (5.16) | 3.560 (89.66)† | 2.427 (61.65)† | .875 (22.23) | 2.840 (72.14) | 2.188 (55.58) | 2.750 (69.85) | .173 (4.39) | 2.688 (68.28) | - |

†Not to MS specification

*Not Available in MS3101E and MS3101R.

| Shell Size | A Thread | Shell Size | A Thread |
|------------|---------------|------------|-----------------|
| 8S | 1/2-28UNEF-2A | 16 | 1-20UNEF-2A |
| 10S | 5/8-24UNEF-2A | 18 | 1-1/8-18UNEF-2A |
| 10SL | 5/8-24UNEF-2A | 20 | 1-1/4-18UNEF-2A |
| 12S | 3/4-20UNEF-2A | 22 | 1-3/8-18UNEF-2A |
| 14S | 7/8-20UNEF-2A | 24 | 1-1/2-18UNEF-2A |
| 16S | 1-20UNEF-2A | 28 | 1-3/4-18UNS-2A |
| 12 | 3/4-20UNEF-2A | 32 | 2-18UNS-2A |
| 14 | 7/8-20UNEF-2A | 36 | 2-1/4-16UN-2A |
| | | 40 | 2-1/2-16UN-2A |

Performance Specifications - Page 168

Contact, Sealing Plugs, Assembly Tools - Page

187

Contact Arrangements - Page 171-174

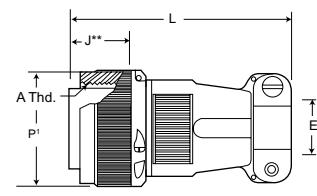

Straight Plug

MS3106E/MS3106F
Integral Cable Clamp

CA3106E/CA06R

MS3106F straight plugs mate with 3100 and 3102 receptacles and 3101 plugs.

The MS3106E is available upon request. For new equipment, customer should specify. MS3106F, MS3106E is identical to MS3106F except to O ring under the coupling nut.





MS3106R

CA3106R



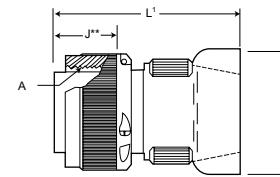The MS3106R straight plug is identical in purpose to the MS3106F. The MS3106R has the shorter endbell. This plug will mate with 3100 and 3102 receptacles and 3101 plugs.



| Shell Size | E Max. | E Min. | J** Max. | L Max. | L' Max. | N Max. | P1 Max. | V Max. | W Max. |
|------------|---------------|--------------|--------------|----------------|----------------|---------------|----------------|---------------|---------------|
| 8S | .235 (5.97) | .102 (2.59) | .536 (13.61) | 2.250 (57.15) | 1.838 (46.69) | .890 (22.61) | .844 (21.44) | .840 (21.34) | 1.046 (26.57) |
| 10S | .235 (5.97) | .102 (2.59) | .536 (13.61) | 2.250 (57.15) | 1.838 (46.69) | .890 (22.61) | .969 (24.61) | .840 (21.34) | 1.046 (26.57) |
| 10SL | .297 (7.54) | .140 (3.56) | .536 (13.61) | 2.250 (57.15) | 1.838 (46.69) | .970 (24.64) | .969 (24.61) | .900 (22.86) | 1.125 (28.58) |
| 12S | .297 (7.54) | .140 (3.56) | .536 (13.61) | 2.250 (57.15) | 1.838 (46.69) | .970 (24.64) | 1.062 (26.97) | .900 (22.86) | 1.125 (28.58) |
| 14S | .422 (10.72) | .195 (4.95) | .536 (13.61) | 2.250 (57.15) | 1.838 (46.69) | 1.150 (29.21) | 1.156 (29.36) | 1.00 (27.94) | 1.343 (34.11) |
| 16S | .547 (13.89) | .255 (6.48) | .536 (13.61) | 2.250 (57.15) | 1.838 (46.69) | 1.250 (31.75) | 1.250 (31.75) | 1.200 (30.48) | 1.484 (37.69) |
| 12 | .297 (7.54) | .140 (3.56) | .724 (18.39) | 2.625 (66.68) | 2.181 (55.40) | .970 (24.64) | 1.062 (26.97) | .900 (22.86) | 1.125 (28.58) |
| 14 | .422 (10.72) | .195 (4.95) | .724 (18.39) | 2.625 (66.68) | 2.181 (55.40) | 1.150 (29.21) | 1.156 (29.36) | 1.100 (27.94) | 1.343 (34.11) |
| 16 | .547 (13.89) | .255 (6.48) | .724 (18.39) | 2.625 (66.68) | 2.181 (55.40) | 1.250 (31.75) | 1.250 (31.75) | 1.200 (30.48) | 1.484 (37.69) |
| 18 | .610 (15.49) | .285 (7.24) | .724 (18.39) | 2.688 (68.28) | 2.281 (55.40) | 1.450 (36.83) | 1.344 (34.14) | 1.300 (33.02) | 1.609 (40.87) |
| 20 | .735 (18.67) | .350 (8.89) | .724 (18.39) | 2.750 (69.85) | 2.281 (55.40) | 1.570 (39.88) | 1.469 (37.31) | 1.500 (38.10) | 1.890 (48.01) |
| 22 | .740 (18.80) | .350 (8.89) | .724 (18.39) | 2.750 (69.85) | 2.281 (55.40) | 1.570 (39.88) | 1.594 (40.49) | 1.500 (38.10) | 1.890 (48.01) |
| 24 | .922 (23.42) | .468 (11.89) | .724 (18.39) | 2.969 (75.41) | 2.281 (55.40) | 1.880 (47.75) | 1.719 (43.66) | 1.740 (44.20) | 2.170 (55.12) |
| 28 | .922 (23.42) | .468 (11.89) | .724 (18.39) | 3.031 (76.99) | 2.281 (55.40) | 1.880 (47.75) | 1.969 (50.01) | 1.740 (44.20) | 2.170 (55.12) |
| 32 | 1.235 (31.37) | .664 (15.87) | .724 (18.39) | 3.031 (76.99) | 2.322 (58.98) | 2.205 (56.01) | 2.219 (56.36) | 2.075 (52.71) | 2.656 (67.46) |
| 36 | 1.360 (34.54) | .694 (17.63) | .724 (18.39) | 3.281 (83.34) | 2.322 (58.98) | 2.400 (60.96) | 2.469 (62.71) | 2.300 (58.42) | 2.922 (74.22) |
| * 40 | 1.628 (41.35) | .911 (23.14) | .724 (18.39) | 3.560 (89.66)† | 2.427 (61.65)† | 2.840 (72.14) | 2.723 (69.16)† | 2.688 (68.28) | - |

†Not to MS specification

** Barrel engaging face to shoulder.

| Shell Size | A Thread | Shell Size | A Thread |
|------------|---------------|------------|-----------------|
| 8S | 1/28UNEF-2B | 16 | 1-20UNEF-2B |
| 10S | 5/8-24UNEF-2B | 18 | 1-1/8-18UNEF-2B |
| 10SL | 5/8-24UNEF-2B | 20 | 1-1/4-18UNEF-2B |
| 12S | 3/4-20UNEF-2B | 22 | 1-3/8-18UNEF-2B |
| 14S | 7/8-20UNEF-2B | 24 | 1-1/2-18UNEF-2B |
| 16S | 1-20UNEF-2B | 28 | 1-3/4-18UNS-2B |
| 12 | 3/4-20UNEF-2B | 32 | 2-18UNS-2B |
| 14 | 7/8-20UNEF-2B | 36 | 2-1/4-16UN-2B |
| | | 40 | 2-1/2-16UN-2B |

Performance Specifications - Page 168

Contact, Sealing Plugs, Assembly Tools - Page

187

Contact Arrangements - Page 171-174

How to Order

MS type potting connectors are available with nylon cups. 00 and 06 shell styles with plastic cups and resilient insulators meet the requirements of MS3103 and MS25183. Also available is the 08 plug with resilient insulator and 90° angle nylon potting cup.

ITT Cannon provides for a 1/4" clearance for potting on all contact sizes.

| | | | | |
|----|-------|----|---------|---|
| MS | 25183 | - | 18 - 10 | P |
| MS | 3103 | - | 18 - 10 | P |
| CA | 3100 | ER | 18 - 10 | P |

| | |
|----------------------------|--|
| PREFIX | |
| SHELL STYLE | |
| CLASS | |
| SHELL SIZE | |
| CONTACT ARRANGEMENT | |
| CONTACT TYPE | |

PREFIX
CA - ITT Cannon prefix indicating special application or variation of MS

SHELL STYLE
Coupling thread diameter figured in sixteenths of an inch

SHELL STYLE
3100 - Wall mounting receptacle (MS3103)
3106 - Straight plug (MS25183)
3108 - 90° angle plug



CONTACT ARRANGEMENTS
See pages 171-174

CLASS
ER - Resilient insulator, nylon potting cup and
thread attachment ring
No class designator for MS types.

CONTACT TYPE
P for Pin: S for Socket

Wall Mounting Receptacle

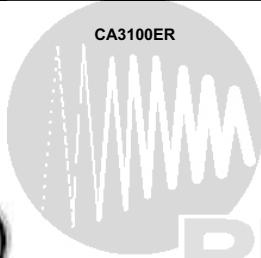MS3103
Nylon Potting Cup
Threaded Attachment Ring



The CA3100ER receptacle (MS3103) is supplied with a resilient insulator and nylon potting cup with a threaded attachment ring. This receptacle mates with 3106, 3107, and 3108 plugs.

| Shell Size | L Max. | R ±.005 (.±0.13) | S Max. | R +.010 (.+0.25) -.005 (.+0.13) | A Thread |
|------------|---------------|------------------|---------------|------------------------------------|----------------|
| 8S | 1.531 (38.89) | .594 (15.09) | .906 (23.01) | .120 (3.05) | 1/2-28UNEF-2A |
| 10S | 1.531 (38.89) | .719 (18.26) | 1.031 (26.19) | .120 (3.05) | 5/8-24NEF-2A |
| 10SL | 1.531 (38.89) | .719 (18.26) | 1.031 (26.19) | .120 (3.05) | 5/8-24NEF-2A |
| 12S | 1.531 (38.89) | .812 (20.62) | 1.125 (28.58) | .120 (3.05) | 3/4-20UNEF-2A |
| 14S | 1.531 (38.89) | .906 (23.01) | 1.219 (30.96) | .120 (3.05) | 7/8-20UNEF-2A |
| 16S | 1.531 (38.89) | .969 (24.61) | 1.312 (33.32) | .120 (3.05) | 1-20UNEF-2A |
| 12 | 1.968 (49.99) | .812 (20.62) | 1.125 (28.58) | .120 (3.05) | 3/4-20UNEF-2A |
| 14 | 1.968 (49.99) | .906 (23.01) | 1.219 (30.96) | .120 (3.05) | 3/4-20UNEF-2A |
| 16 | 1.968 (49.99) | .968 (24.59) | 1.312 (33.32) | .120 (3.05) | 1-20UNEF-2A |
| 18 | 1.968 (49.99) | 1.062 (26.97) | 1.406 (35.71) | .120 (3.05) | 1-1/8-18NEF-2A |
| 20 | 2.188 (55.58) | 1.156 (29.36) | 1.531 (38.89) | .120 (3.05) | 1-1/4-18NEF-2A |
| 22 | 2.188 (55.58) | 1.250 (31.75) | 1.656 (42.06) | .120 (3.05) | 1-3/8-18NEF-2A |
| 24 | 2.188 (55.58) | 1.375 (34.92) | 1.781 (45.24) | .147 (3.73) | 1-1/2-18NEF-2A |
| 28 | 2.188 (55.58) | 1.562 (39.67) | 2.031 (51.59) | .147 (3.73) | 1-3/4-18NS-2A |
| 32 | 2.188 (55.58) | 1.750 (44.45) | 2.281 (57.94) | .173 (4.39) | 2-18NS-2A |
| 36 | 2.188 (55.58) | 1.938 (49.23) | 2.531 (64.29) | .173 (4.39) | 2-1/4-16UN-2A |

Performance Specifications - Page 168

Contact, Sealing Plugs, Assembly Tools - Page

187



Contact Arrangements - Page 171-174

Straight Plug

MS25183
Nylon Potting Cup
Rubber Gasket



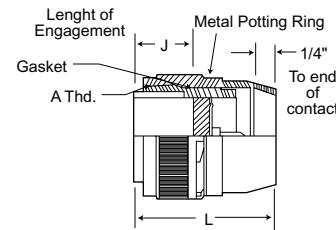CA3106ER





The CA3106ER plug is supplied with resilient insulators, nylon potting cups with threaded attachment rings, and a rubber gasket under the coupling nut. This plug mates with 3100 and 3102 receptacles and 3101 plugs.

90° Angle Plug

Nylon Potting Cup
Rubber Gasket

CA3108ER



The CA3108ER is supplied with resilient insulator, 90° nylon potting cup and threaded attachment ring with a rubber gasket under the coupling nut. This plug mates with 3100 and 3102 receptacles and 3101 plugs.

| CA3106ER | | | | | CA3108ER | | | | | | |
|------------|--------------|---------------|---------------|-----------------|--------------|---------------|-------------------------------|-----------------------------|----------------|-----------------|--|
| Shell Size | J Max. | L Max. | P Max. | A Thread | B Max. | D Max. | L Max. | | P Max. | A Thread | |
| | | | | | | | For Arr. w/#16 & #12 Contacts | For Arr. w/#8 & #4 Contacts | | | |
| 8S | .536 (13.61) | 1.562 (39.67) | .844 (21.44) | 1/2-28UNEF-2B | - | - | - | - | - | - | |
| 10S | .536 (13.61) | 1.562 (39.67) | .969 (24.61) | 5/8-24UNEF-2B | - | - | - | - | - | - | |
| 10SL | .536 (13.61) | 1.562 (39.67) | .969 (24.61) | 5/8-24UNEF-2B | .563 (13.61) | 1.040 (26.42) | 1.463 (37.16) | - | .969 (24.61) | 5/8-24UNEF-2B | |
| 12S | .536 (13.61) | 1.562 (39.67) | 1.062 (26.97) | 3/4-20UNEF-2B | .563 (13.61) | 1.040 (26.42) | 1.600 (40.64) | - | 1.062 (26.97) | 3/4-24UNEF-2B | |
| 14S | .536 (13.61) | 1.562 (39.67) | 1.156 (29.36) | 7/8-20UNEF-2B | .563 (13.61) | 1.040 (26.42) | 1.600 (40.64) | 2.300 (58.42) | 1.156 (29.36) | 7/8-20UNEF-2B | |
| 16S | .536 (13.61) | 1.562 (39.67) | 1.250 (31.75) | 1-20UNEF-2B | .563 (13.61) | 1.290 (32.77) | 1.600 (40.64) | 2.550 (64.77) | 1.250 (31.75) | 1-20UNEF-2B | |
| 12 | .724 (18.39) | 2.000 (50.80) | 1.062 (26.97) | 3/4-20UNEF-2B | .724 (18.39) | 1.040 (26.42) | 1.910 (48.51) | - | 1.062 (26.97) | 3/4-20UNEF-2B | |
| 14 | .724 (18.39) | 2.000 (50.80) | 1.156 (29.36) | 7/8-20UNEF-2B | .724 (18.39) | 1.040 (26.42) | 1.910 (48.51) | 2.610 (66.29) | 1.156 (29.36) | 7/8-20UNEF-2B | |
| 16 | .724 (18.39) | 2.000 (50.80) | 1.250 (31.75) | 1-20UNEF-2B | .724 (18.39) | 1.290 (32.77) | 1.910 (48.51) | 2.850 (72.39) | 1.250 (31.75) | 1-20UNEF-2B | |
| 18 | .724 (18.39) | 2.000 (50.80) | 1.344 (34.14) | 1-1/8-18UNEF-2B | .724 (18.39) | 1.290 (32.77) | 2.100 (53.34) | 2.850 (72.39) | 1.344 (34.14) | 1-1/8-18UNEF-2B | |
| 20 | .724 (18.39) | 2.125 (53.98) | 1.469 (37.31) | 1-1/4-18UNEF-2B | .724 (18.39) | 1.540 (39.12) | 2.100 (53.34) | 2.850 (72.39) | 1.469 (.37.31) | 1-1/4-18UNEF-2B | |
| 22 | .724 (18.39) | 2.125 (53.98) | 1.594 (40.49) | 1-3/8-18UNEF-2B | .724 (18.39) | 1.540 (39.12) | 2.100 (53.34) | 2.850 (72.39) | 1.594 (40.49) | 1-3/8-18UNEF-2B | |
| 24 | .724 (18.39) | 2.125 (53.98) | 1.719 (43.66) | 1-1/2-18UNEF-2B | .724 (18.39) | 1.790 (45.47) | 2.281 (57.94) | 2.985 (75.82) | 1.719 (43.66) | 1-1/2-18UNEF-2B | |
| 28 | .724 (18.39) | 2.125 (53.98) | 1.969 (50.01) | 1-3/4-18UNS-2B | .724 (18.39) | 2.040 (51.82) | 2.485 (63.12) | 2.985 (75.82) | 1.969 (50.01) | 1-3/4-18UNS-2B | |
| 32 | .724 (18.39) | 2.180 (55.37) | 1.219 (30.96) | 2-18UNS-2B | .724 (18.39) | 2.290 (58.17) | 2.485 (63.12) | 2.985 (75.82) | 1.219 (30.96) | 2-18UNS-2B | |
| 36 | .724 (18.39) | 2.180 (55.37) | 2.469 (62.71) | 2-1/4-16UN-2B | .724 (18.39) | 2.540 (64.52) | 2.485 (63.12) | 2.985 (75.82) | 2.469 (62.71) | 2-1/4-16UN-2B | |
| 40 | .724 (18.39) | 2.180 (55.37) | 2.723 (69.16) | 2-1/2-16UN-2B | | | | | | | |

Performance Specifications - Page 168


Contact, Sealing Plugs, Assembly Tools - Page

187

Contact Arrangements - Page 171-174

ComponentsMS3106R
CA3106R
Straight PlugMS3106F
CA06R
Straight PlugMS3106E*
CA3106E
Straight PlugMS3108E
CA3108E
90° Angle PlugMS3108R
CA3108R
90° Angle Plug

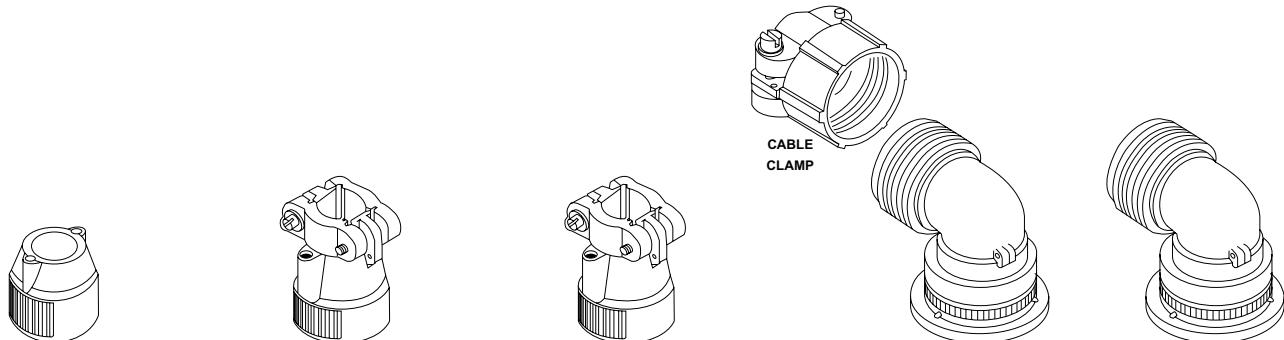
Endbell



Ferrule



Grommet




Pin Contacts




Insulator



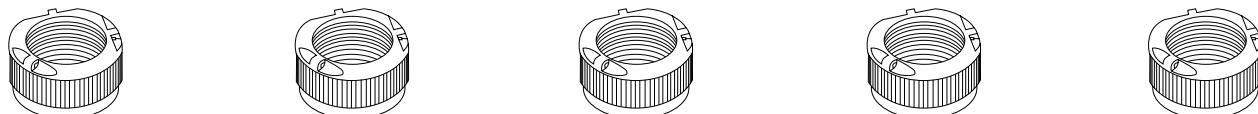Coupling Nut



Barrel

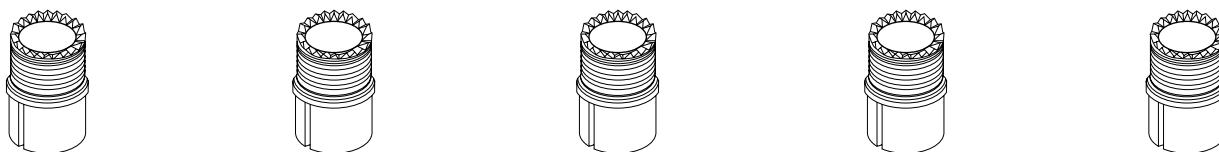

O Ring



Note: Class F is not applicable to MS3108 shell style.

* Class E inactive for new design. Use Class F or R.




How to Order

TBF and BFR pressurized bulkhead receptacles mate with standard MS type plugs (3106, 3107 and 3108) if contact arrangements correspond. Both the BFR and TBF have resilient insulators. The TBF (thru-bulkhead fitting) version has a double-faced construction allowing mating from both ends. An O ring is supplied as standard on both the BFR and the TBF. Contacts are silver plated copper or brass alloy. Shells are aluminum alloy.

| | | | | | | |
|---|---|---|---------|----|---|---|
| PREFIX | BF | R | 14S - 5 | P | * | 1 |
| | TBF | | 20 - 15 | PS | * | |
| CLASS | | | | | | |
| SHELL SIZE | | | | | | |
| CONTACT ARRANGEMENT | | | | | | |
| CONTACT TYPE | | | | | | |
| ALTERNATE POSITION | | | | | | |
| MOUNTING (BFR ONLY) | | | | | | |
| PREFIX | CONTACT ARRANGEMENTS | | | | | |
| BF - Bulkhead Fittings | See pages 171 - 174. | | | | | |
| TBF - Thru bulkhead fittings | | | | | | |
| CLASS | CONTACT TYPE | | | | | |
| * R - Resilient insulators | P for Pin; S for Socket; PS for Pin and Socket (TBF only) | | | | | |
| H - Hermetic; see page 327 | | | | | | |
| * Letter designator "R" not required for TBF. | | | | | | |
| SHELL SIZE | ALTERNATE POSITION | | | | | |
| Coupling thread diameter figured in sixteenths of an inch | (Consult factory for available alternate positions.) | | | | | |
| MOUNTING | | | | | | |
| BFR only; see chart on page 183 | | | | | | |

Thru-Bulkhead Receptacle

TBF - Resilient Insulator



TBF thru-bulkhead fittings have pressurized resilient insulators. Special double-face pin and socket contact construction permits cable components to be wired and tested in the shop and then to be plugged into the mounted TBF plug to complete the installation. The TBF mates with 3106, 3107 and 3108 plugs.

| Shell Size | K Max. | L Max. | M +.031 (0.79) -.000 (0.00) | R +.005 (0.13) | S +.031 (0.79) | T +.010 (0.25) -.005 (0.13) | V Max. | A Thread |
|------------|-------------|---------------|-----------------------------------|-------------------|-------------------|-----------------------------------|--------------|-----------------|
| 8S | .125 (3.18) | 1.482 (37.64) | .562 (14.27) | .594 (15.09) | .875 (22.22) | .120 (3.05) | .325 (8.26) | 1/2-28UNEF-2A |
| 10S | .125 (3.18) | 1.482 (37.64) | .562 (14.27) | .179 (18.26) | 1.000 (25.40) | .120 (3.05) | .325 (8.26) | 5/8-24UNEF-2A |
| 10SL | .125 (3.18) | 1.482 (37.64) | .562 (14.27) | .179 (18.26) | 1.000 (25.40) | .120 (3.05) | .325 (8.26) | 5/8-24UNEF-2A |
| 12S | .140 (3.56) | 1.482 (37.64) | .562 (14.27) | .812 (20.62) | 1.094 (27.79) | .120 (3.05) | .325 (8.26) | 3/4-20UNEF-2A |
| 14S | .140 (3.56) | 1.482 (37.64) | .562 (14.27) | .906 (23.01) | 1.188 (30.18) | .120 (3.05) | .325 (8.26) | 7/8-20UNEF-2A |
| 16S | .140 (3.56) | 1.482 (37.64) | .562 (14.27) | .968 (24.59) | 1.281 (32.54) | .120 (3.05) | .325 (8.26) | 1-20UNEF-2A |
| 12 | .146 (3.71) | 2.030 (51.56) | .750 (19.05) | .812 (20.62) | 1.094 (27.79) | .120 (3.05) | .445 (11.30) | 3/4-20UNEF-2A |
| 14 | .146 (3.71) | 2.030 (51.56) | .750 (19.05) | .906 (23.01) | 1.188 (30.18) | .120 (3.05) | .445 (11.30) | 7/8-20UNEF-2A |
| 16 | .146 (3.71) | 2.030 (51.56) | .750 (19.05) | .968 (24.59) | 1.281 (32.54) | .120 (3.05) | .445 (11.30) | 1-20UNEF-2A |
| 18 | .180 (4.57) | 2.030 (51.56) | .750 (19.05) | 1.062 (26.97) | 1.375 (34.92) | .120 (3.05) | .445 (11.30) | 1/18-18UNEF-2A |
| 20 | .180 (4.57) | 2.030 (51.56) | .750 (19.05) | 1.156 (29.36) | 1.500 (38.10) | .120 (3.05) | .445 (11.30) | 1-1/4-18UNEF-2A |
| 22 | .180 (4.57) | 2.030 (51.56) | .750 (19.05) | 1.250 (31.75) | 1.625 (41.28) | .120 (3.05) | .445 (11.30) | 1-3/8-18UNEF-2A |
| 24 | .203 (5.16) | 2.030 (51.56) | .812 (20.62) | 1.375 (34.92) | 1.750 (44.45) | .147 (3.73) | .383 (9.73) | 1-1/2-18UNEF-2A |
| 28 | .203 (5.16) | 2.030 (51.56) | .812 (20.62) | 1.562 (39.67) | 2.000 (50.80) | .147 (3.73) | .383 (9.73) | 1-3/4-18UNS-2A |
| 32 | .203 (5.16) | 2.030 (51.56) | .875 (22.22) | 1.750 (44.45) | 2.250 (57.15) | .173 (4.39) | .320 (8.13) | 2-18UNS-2A |
| 36 | .203 (5.16) | 2.030 (51.56) | .812 (20.62) | 1.938 (49.23) | 2.500 (63.50) | .173 (4.39) | .383 (9.73) | 2-1/4-16UN-2A |
| 40 | .203 (5.16) | 2.030 (51.56) | .875 (22.22) | 2.188 (55.58) | 2.750 (69.85) | .173 (4.39) | .383 (9.73) | |

Performance Specifications - Page 168

Contacts, Sealing Plugs, Assembly Tools - Page 187




Contact Arrangements - Page 171-174

Pressurized Bulkhead Receptacle

BFR



BFR pressurized bulkhead receptacles withstand the air leakage requirements of MIL-C-5015 not to exceed 1 cu. in. of air per hour when subjected to a pressure differential of 30 psi at - 55°C. Insulators are resilient material bonded to aluminum shell. Both pin and socket assemblies are available. The BFR will mate with standard MS type 3106, 3107, 3108 plugs.



Standard Position
Pin is 3/32" Dia.

TYPE 1

| | |
|--------------|-----------------------|
| Shell | Standard |
| Insulator | Polychloroprene |
| Lock Nut | Hex with 6 wire holes |
| O Ring | Neoprene |
| Position Pin | Standard |
| Mounting | Figure 1 or 2 |

Part No. Example: BFR14S-5P-1


| Shell Size | C Max. | G Max. | H Max. | L Max. | M Max. | N Max. | #16 | T Max. Solder Pot Ext. | | | | V Max. |
|------------|---------------|---------------|---------------|---------------|---------------|---------------|-------------|------------------------|-------------|-------------|-------------|-------------|
| | | | | | | | | #12 | #8 | #4 | #0 | |
| 8S | .853 (21.67) | .895 (22.73) | 1.077 (27.36) | 1.087 (27.61) | .702 (17.83) | .820 (20.83) | .140 (3.56) | - | - | - | - | .250 (6.35) |
| 10S | .853 (21.67) | 1.015 (25.78) | 1.203 (30.56) | 1.087 (27.61) | .822 (20.88) | .960 (24.38) | .140 (3.56) | - | - | - | - | .250 (6.35) |
| 10SL | .853 (21.67) | 1.015 (25.78) | 1.203 (30.56) | 1.087 (27.61) | .822 (20.88) | .960 (24.38) | .140 (3.56) | - | - | - | - | .250 (6.35) |
| 12S | .853 (21.67) | 1.077 (27.36) | 1.327 (33.71) | 1.087 (27.61) | .955 (24.26) | 1.110 (28.19) | .140 (3.56) | - | - | - | - | .250 (6.35) |
| 14S | .853 (21.67) | 1.203 (30.56) | 1.453 (36.91) | 1.087 (27.61) | 1.072 (27.23) | 1.250 (31.75) | .140 (3.56) | - | - | - | - | .375 (9.52) |
| 16S | .853 (21.67) | 1.327 (33.71) | 1.577 (40.06) | 1.087 (27.61) | 1.265 (32.13) | 1.460 (37.08) | .140 (3.56) | - | - | - | - | .375 (9.52) |
| 12 | 1.244 (31.60) | 1.077 (27.36) | 1.327 (33.71) | 1.525 (38.74) | .955 (24.26) | 1.110 (28.19) | .062 (1.57) | .062 (1.57) | - | - | - | .375 (9.52) |
| 14 | 1.244 (31.60) | 1.203 (30.56) | 1.453 (36.91) | 1.525 (38.74) | 1.072 (27.23) | 1.250 (31.75) | .062 (1.57) | .062 (1.57) | .125 (3.18) | - | - | .375 (9.52) |
| 16 | 1.244 (31.60) | 1.327 (33.71) | 1.577 (40.06) | 1.525 (38.74) | 1.265 (32.13) | 1.460 (37.08) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | - | .375 (9.52) |
| 18 | 1.244 (31.60) | 1.453 (36.91) | 1.703 (43.26) | 1.525 (38.74) | 1.395 (35.43) | 1.610 (40.89) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | - | .375 (9.52) |
| 20 | 1.244 (31.60) | 1.577 (40.06) | 1.827 (46.41) | 1.525 (38.74) | 1.515 (38.48) | 1.750 (44.45) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | .359 (9.12) | .375 (9.52) |
| 22 | 1.244 (31.60) | 1.577 (40.06) | 1.953 (49.61) | 1.525 (38.74) | 1.635 (41.53) | 1.900 (48.26) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | .359 (9.12) | .375 (9.52) |
| 24 | 1.244 (31.60) | 1.827 (46.41) | 2.077 (52.76) | 1.525 (38.74) | 1.765 (44.83) | 2.030 (51.56) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | .359 (9.12) | .375 (9.52) |
| 28 | 1.244 (31.60) | 1.953 (49.61) | 2.327 (59.11) | 1.525 (38.74) | 2.015 (51.18) | 2.330 (59.18) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | .359 (9.12) | .375 (9.52) |
| 32 | 1.244 (31.60) | 2.203 (55.96) | 2.577 (65.46) | 1.525 (38.74) | 2.205 (56.01) | 2.550 (64.77) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | .359 (9.12) | .375 (9.52) |
| 36 | 1.244 (31.60) | 2.577 (65.46) | 2.827 (71.81) | 1.525 (38.74) | 2.455 (62.36) | 2.840 (72.14) | .062 (1.57) | .062 (1.57) | .125 (3.18) | .125 (3.18) | .359 (9.12) | .312 (7.92) |

| Shell Size | A Thread | Shell Size | A Thread |
|------------|---------------|------------|-----------------|
| 8S | 1/2-28UNEF-2A | 16 | 1-20UNEF-2A |
| 10S | 5/8-24UNEF-2A | 18 | 1-1/8-18UNEF-2A |
| 10SL | 5/8-24UNEF-2A | 20 | 1-1/4-18UNEF-2A |
| 12S | 3/4-20UNEF-2A | 22 | 1-3/8-18UNEF-2A |
| 14S | 7/8-20UNEF-2A | 24 | 1-1/2-18UNEF-2A |
| 16S | 1-20UNEF-2A | 28 | 1-3/4-18UNS-2A |
| 12 | 3/4-20UNEF-2A | 32 | 2-18UNS-2A |
| 14 | 7/8-20UNEF-2A | 36 | 2-1/4-16UN-2A |

Performance Specifications - Page 168

Contacts, Sealing Plugs, Assembly Tool - Page 187

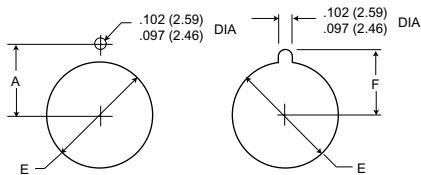Contact Arrangements - Page 171-174

Mounting Dimensions

| Shell Size | A +.005 (.13) | E +.015 (0.38) -.000 (0.00) | F +.005 (.13) |
|------------|---------------------|-----------------------------------|---------------------|
| 8S | .323 (8.20) | .500 (12.70) | .373 (9.47) |
| 10S, 10SL | .385 (9.78) | .625 (15.88) | .435 (11.05) |
| 12S, 12 | .448 (11.38) | .750 (19.05) | .498 (12.65) |
| 14S, 14 | .510 (12.95) | .875 (22.22) | .560 (14.22) |
| 16S, 16 | .573 (14.55) | 1.000 (25.40) | .623 (15.82) |
| 18 | .635 (16.13) | 1.125 (28.58) | .685 (17.40) |

| Shell Size | A +.005 (.13) | E +.015 (0.38) -.000 (0.00) | F +.005 (.13) |
|------------|---------------------|-----------------------------------|---------------------|
| 20 | .698 (17.73) | 1.250 (31.75) | .748 (19.00) |
| 22 | .760 (19.30) | 1.375 (34.92) | .810 (20.57) |
| 24 | .823 (20.90) | 1.500 (38.10) | .873 (22.17) |
| 28 | .948 (24.08) | 1.750 (44.45) | .998 (25.35) |
| 32 | 1.073 (27.25) | 2.000 (50.80) | 1.123 (28.52) |
| 36 | 1.198 (30.43) | 2.250 (57.15) | 1.248 (31.70) |

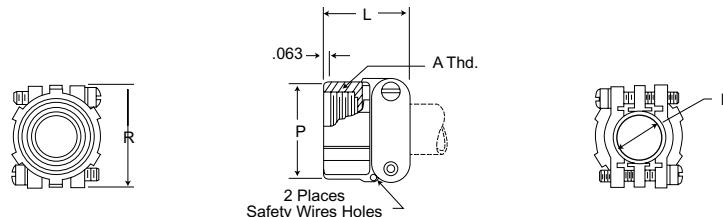
Cable Clamp

M85049/41

With or Without Bushing



The M85049/41 cable clamp is made for plugs and receptacles that have an endbell with external conduit threads. The double clamping action provides a balanced, positive hold on the wires and greatly reduces moisture transmission. Provision is made for safety wiring. This clamp is supplied without bushing; to order bushing; add "with bushing" after part number.





| Part Number* | Superseded Part Number* | Fits Shell Size | Accommodates MS Bushings | E Min. | E Max. | L ± 0.31 (0.79) | P ± 0.31 (0.79) | R ± 0.31 (0.79) | A Thread |
|---------------|-------------------------|----------------------|--------------------------|--------------|---------------|---------------------|---------------------|---------------------|------------------|
| M85049/41-3A | MS3057-3A | 8S-10S | MS3420-3 | .102 (2.59) | .250 (6.35) | .812 (20.62) | .688 (17.48) | .812 (20.62) | 1/2-28UNEF-2B |
| M85049/41-4A | MS3057-4A | 10SL, 12S, 12 | MS3420-4 | .140 (3.56) | .312 (7.92) | .812 (20.62) | .812 (20.62) | .875 (22.22) | 5/8-24UNEF-2B |
| M85049/41-6A | MS3057-6A | 14S, 14 | MS3420-6 | .195 (4.95) | .438 (11.13) | .875 (22.22) | .969 (24.61) | 1.062 (26.97) | 3/4-20UNEF-2B |
| M85049/41-8A | MS3057-8A | 16S, 16 | MS3420-8 | .255 (6.48) | .562 (14.27) | .938 (23.83) | 1.094 (27.79) | 1.156 (29.36) | 7/8-20UNEF-2B |
| M85049/41-10A | MS3057-10A | 18 | MS3420-10 | .285 (7.24) | .625 (15.88) | .938 (23.83) | 1.188 (30.18) | 1.250 (31.75) | 1-20UNEF-2B |
| M85049/41-12A | MS3057-12A | 20, 22 | MS3420-12 | .350 (8.89) | .750 (19.05) | .938 (23.83) | 1.375 (34.92) | 1.469 (37.31) | 1-3/16-18UNEF-2B |
| M85049/41-16A | MS3057-16A | 24, 28 | MS3420-16, 12 | .468 (11.89) | .938 (23.83) | 1.031 (26.19) | 1.656 (42.06) | 1.688 (42.88) | 1-7/16-18UNEF-2B |
| M85049/41-20A | MS3057-20A | 32 | MS3420-20, 16 | .664 (16.87) | 1.250 (31.75) | 1.094 (27.79) | 2.031 (51.59) | 2.031 (51.59) | 1-3/4-18UNS-2B |
| M85049/41-24A | MS3057-24A | 36 | MS3420-24, 20 | .694 (17.63) | 1.375 (34.92) | 1.156 (29.36) | 2.219 (56.36) | 2.281 (57.94) | 2-18UNS-2B |
| M85049/41-28A | MS3057-28A | 40 | MS3420-24, 20 | .911 (23.14) | 1.625 (41.28) | 1.688 (42.88) | 2.500 (63.50) | 2.688 (68.28) | 2-1/4-16UN-2B |
| M85049/41-32A | MS3057-32A | 44 | MS3420-32, 28, 24 | - | 1.875 (47.62) | 1.750 (44.45) | 2.781 (70.64) | 2.938 (74.63) | 2-1/2-16UN-2B |
| M85049/41-40A | MS3057-40A | 48 | MS3420-40, 32, 28 | - | 2.375 (60.32) | 1.750 (44.45) | 3.281 (83.34) | 3.500 (88.90) | 3-16UN-2B |

*To order cable clamp with bushing, add "with bushing" after part number.

Telescoping BushingMS3420/
MS39056(REF.)

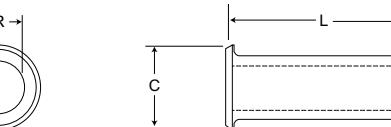CA18220

Telescoping bushing with
M85049/41 cable clamp

Telescoping gland bushing (used with M85049/41 cable clamp) keep dirt, oil and moisture out of endbell. Taping or wrapping wires is eliminated since bushing protects wires going thru clamp. Combinations of bushings may be used to decrease cable entry diameter to improve sealing.


| MS Part Number | Superseded MS Part Number | ITT Cannon Part Number | Fits Shell Size | C ± 0.16 (0.41) | L ± 0.31 (0.79) | R ± 0.16 (0.41) |
|----------------|---------------------------|------------------------|----------------------|---------------------|---------------------|---------------------|
| MS3420-3 | MS39056-1 | CA18220-3 | 8S-10S | .379 (9.63) | 2.875 (73.02) | 1.30 (3.30) |
| MS3420-4 | MS39056-2 | CA18220-4 | 10SL, 12S, 12 | .505 (12.83) | 2.750 (69.85) | .200 (5.59) |
| MS3420-6 | MS39056-3 | CA18220-6 | 14S, 14 | .619 (15.72) | 2.625 (66.68) | .312 (7.92) |
| MS3420-8 | MS39056-4 | CA18220-8 | 16S, 16 | .744 (18.90) | 2.500 (63.50) | .437 (11.10) |
| MS3420-10 | MS39056-5 | CA18220-10 | 18 | .869 (22.07) | 2.375 (60.32) | .562 (14.27) |
| MS3420-12 | MS39056-6 | CA18220-12 | 20, 22 | 1.064 (27.03) | 2.250 (57.15) | .625 (15.88) |
| MS3420-16 | MS39056-7 | CA18220-16 | 24, 28 | 1.314 (33.38) | 2.125 (53.98) | .750 (19.05) |
| MS3420-20 | MS39056-8 | CA18220-20 | 32 | 1.596 (40.54) | 2.000 (50.80) | .937 (23.80) |
| MS3420-24 | MS39056-9 | CA18220-24 | 36 | 1.847 (46.91) | 1.875 (47.62) | 1.250 (31.75) |
| MS3420-28 | MS39056-10 | CA18220-28 | 40 | 2.085 (52.96) | 1.750 (44.45) | 1.375 (34.92) |
| MS3420-32 | MS39056-11 | CA18220-32 | 44 | 2.335 (59.31) | 1.625 (41.28) | 1.624 (41.25) |
| MS3420-40 | MS39056-12 | CA18220-40 | 48 | 2.835 (72.01) | 1.500 (38.10) | 1.874 (47.60) |

Plastic Protective Caps



025-XXXX-000

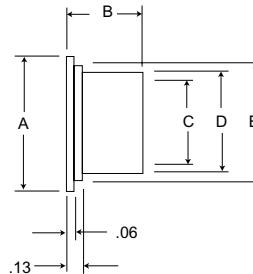Protective dust caps are designed to cover the coupling and conduit ends of MS connectors where there is a possibility of foreign matter accumulating on the interior of the connector or of damage to the threaded parts. Material is red polyethylene. Plastic dust caps can be reused, but are not intended to replace the standard aluminum dust caps shown on preceding pages.



| Part Number* | MS3100F,R | | MS3102F,R | | MS-F (only) Solder Pot End | MS3106/MS3108 F,R | | Dimensions | | | | | |
|--------------|-----------------|-------------------|-----------------|-------------------|----------------------------------|----------------------|-------------------|------------|-----------|-----------|-----------|-----------|------------|
| | Coupling End | Solder Pot End | Coupling End | Solder Pot End | | Coupling End | Solder Pot End | A Max. | B Max. | C Max. | D Max. | E Max. | Wt. Lb. |
| 025-0458-000 | | | | 8S | | 8S | | .673 | .440 | .430 | .486 | .583 | .0012 |
| 025-0459-000 | 8S | 8S, 10S | 8S | 8S, 10S | 10S | | 8S, 10S | .734 | .440 | .490 | .546 | .644 | .0014 |
| 025-0460-000 | 10S, 10SL | 10SL, 12S, 12 | 10S, 10SL | 10SL, 12S, 12 | | 10SL, 12S, 12 | 10SL, 12S, 12 | .848 | .700 | .600 | .656 | .758 | .0022 |
| 025-0462-000 | 12S, 12 | 14S, 14 | 12S, 12 | 14S, 14 | | | 14S, 14 | .973 | .700 | .730 | .786 | .883 | .0028 |
| 025-0463-000 | 14S, 14 | 16S, 16 | 14S, 14 | 16S, 16 | | | 16S, 16 | 1.098 | .700 | .850 | .908 | 1.008 | .0033 |
| 025-0466-000 | | | | 18 | 18 | | | 1.209 | .700 | .950 | 1.016 | 1.119 | .0042 |
| 025-0467-000 | | | | 20 | | 20 | | 1.396 | .700 | 1.150 | 1.216 | 1.308 | .0054 |
| 025-0468-000 | 20 | | 20 | 22 | 22 | | | 1.500 | .700 | 1.240 | 1.306 | 1.405 | .0060 |
| 025-0469-000 | 22 | | 22 | 24 | 24 | | | 1.625 | .700 | 1.360 | 1.426 | 1.530 | .0067 |
| 025-0470-000 | | | | 28 | | | | 1.870 | .700 | 1.610 | 1.676 | 1.775 | .0087 |
| 025-0471-000 | | | | 32 | | | | 2.120 | .700 | 1.860 | 1.926 | 2.025 | .0103 |
| 025-0472-000 | | | | 36 | | | | 2.370 | .700 | 2.110 | 2.176 | 2.275 | .0141 |
| 025-0473-000 | | | | 40 | | | | 2.501 | .700 | 2.310 | 2.380 | 2.491 | .0164 |
| 025-0474-000 | | | | 44 | | | | 2.872 | .700 | 2.590 | 2.660 | 2.772 | .0186 |
| 025-0475-000 | | | | 48 | | | | 3.122 | .700 | 2.840 | 2.910 | 3.022 | .0222 |
| 025-0477-000 | | | | | | 10S, 10SL | | .802 | .491 | .550 | .616 | .712 | .0017 |
| 025-0478-000 | | | | | | 12S, 12 | | .911 | .571 | .669 | .725 | .821 | .0022 |
| 025-0479-000 | | | | | | 14S, 14 | | 1.036 | .571 | .794 | .850 | .946 | .0027 |
| 025-0480-000 | | | | | | 16S, 16 | | 1.161 | .571 | .919 | .975 | 1.071 | .0033 |
| 025-0484-000 | | | | | | 18 | | 1.290 | .576 | 1.028 | 1.094 | 1.195 | .0044 |
| 025-0486-000 | | | | | | 22 | | 1.540 | .576 | 1.278 | 1.344 | 1.445 | .0058 |
| 025-0487-000 | | | | | | 24 | | 1.665 | .576 | 1.403 | 1.469 | 1.570 | .0066 |
| 025-0488-000 | | | | | | 28 | | 1.907 | .576 | 1.645 | 1.711 | 1.812 | .0084 |
| 025-0489-000 | | | | | | 32 | | 2.157 | .576 | 1.895 | 1.961 | 2.062 | .0102 |
| 025-0490-000 | | | | | | 36 | | 2.412 | .576 | 2.140 | 2.216 | 2.317 | .0132 |
| 025-0491-000 | | | | | | 40 | | 2.672 | .576 | 2.390 | 2.466 | 2.572 | .0163 |
| 025-0492-000 | | | | | | 44 | | 2.922 | .576 | 2.640 | 2.716 | 2.822 | .0186 |
| 025-0493-000 | | | | | | 48 | | 3.172 | .576 | 2.890 | 2.966 | 3.072 | .0213 |
| 025-0498-000 | 16S, 16 | 18 | 16S, 16 | 48 | | | 18 | 1.240 | .700 | .990 | 1.056 | 1.150 | .0044 |
| 025-0499-000 | | 20, 22 | | 36 | | 22 | 20, 22 | 1.427 | .700 | 1.117 | 1.183 | 1.337 | .0055 |
| 025-0500-000 | | 24, 28 | | 40 | | | 24, 28 | 1.677 | .700 | 1.420 | 1.486 | 1.587 | .0072 |
| 025-0501-000 | 28 | 32 | 28 | 44 | | | 32 | 1.985 | .700 | 1.730 | 1.796 | 1.895 | .0095 |
| 025-0502-000 | 32 | 36 | 32 | 32 | | | 36 | 2.245 | .700 | 1.980 | 2.046 | 2.155 | .0114 |
| 025-0503-000 | 36 | 40 | 36 | 24, 28 | | | 40 | 2.495 | .700 | 2.230 | 2.296 | 2.400 | .0134 |
| 025-0504-000 | 40 | 44 | 40 | 20, 22 | | | 44 | 2.742 | .700 | 2.480 | 2.546 | 2.652 | .0186 |
| 025-0505-000 | 48 | | 48 | 18 | | | 48 | 3.257 | .700 | 2.980 | 3.046 | 3.157 | .0233 |
| 025-0507-000 | 18 | | 18 | | 20 | | | 1.365 | .700 | 1.110 | 1.176 | 1.275 | .0050 |
| 025-0510-000 | 24 | | 24 | | | | | 1.740 | .700 | 1.490 | 1.556 | 1.650 | .0077 |
| 025-0511-000 | 44 | 48 | 44 | | | | | 3.007 | .700 | 2.730 | 2.796 | 2.907 | .0220 |
| 025-0608-000 | | | | 8S | | | | .643 | .440 | .400 | .456 | .553 | .0011 |
| 025-0609-000 | | | | 10SL, 12S, 12 | | | | .829 | .700 | .580 | .636 | .739 | .0021 |
| 025-0610-000 | | | | 14S, 14 | | | | .954 | .700 | .710 | .766 | .864 | .0028 |
| 025-0611-000 | | | | 16S, 16 | | | | 1.079 | .700 | .830 | .886 | .989 | .0032 |
| 025-0612-000 | | | | 28 | | | | 1.839 | .700 | 1.570 | 1.626 | 1.744 | .0088 |
| 025-0613-000 | | | | 32 | | | | 2.089 | .700 | 1.820 | 1.876 | 1.994 | .0100 |
| 025-0614-000 | | | | 36 | | | | 2.376 | .700 | 2.010 | 2.066 | 2.231 | .0132 |



ITT Industries

Cannon

Dimensions are shown in inches (millimeters).
Dimensions subject to change.

www.ittcannon.com

F80 Assembly Instructions

ITT Cannon provides a complete line of crimp insertion and extraction tooling to be used with CA-F80 contacts as follows.

| Contact Size | Hand Crimp Tool* | Locator | Power Crimp Tool** | Crimp Head | Locator | Gauge |
|--------------|------------------|---------|--------------------|------------|-----------|---------|
| 16 | M-22520/1-01 | TH-70-1 | CBT-530 | | | |
| 12 | M-22520/1-01 | TP567 | CBT-600/600B | CCH-12-7 | CCHP-12-2 | - |
| 8 | - | - | CBT-600/600B | CCH-8-1 | CCHP-8-1 | CCH-8-1 |
| 4 | - | - | CBT-600/600B | CCH-4-1 | CCHP-4-1 | CCH-4-1 |
| 0 | - | - | CBT-600B | CCH-0-1 | CCHP-0-9 | CCH-0 |

*The M-22520/1-01 is the MIL standard crimp tool for #12 thru #20 contacts and when used with crimp #12, 16 and 20 contacts for the CA-F80.

**The CBT-600 is recommended for crimping of #4 thru #12 contacts. The CBT-600B for #0 thru #8. The appropriate locators and crimp heads are available as shown above

Crimp Tool



Crimping Contacts

- Check the crimp tool to be sure that the proper crimp head locator is used
- Cycle the tool to be sure the indentors are open.
- Place the contact, mating end first, into the tool.
- Insert the stripped wire into the hollow end of the contact. Be sure the wire is inserted as far as it will go.
- Close the tool completely to crimp. Unless the tool is closed completely, the tool will not release the contact.
- Remove the crimped contact from the tool. Check the inspection hole to verify that the wire is fully inserted.

Insert/Extraction Tools



Insert and extraction tools used for these connectors are available for contact sizes 16 thru 0 as shown.

| Contact Size | Insertion Tools | Extraction Tools | Handle Color |
|--------------|-------------------------|---------------------------|--------------|
| 16 | CIT-16 (038895-0000) | CET-16-4 (038888-0004) | Blue |
| 12 | CIT-12 (038896-0000) | CET12-2 (038890-0002) | Yellow |
| 8 | CIT-8 | CET-8 | Red |
| 4 | CIT-4 | CET-4 | Blue |
| 0 | CIT-0 | CET-0 | Yellow |



CBT-600



CBT-520/530

Insertion of Contacts

- Before inserting the contacts, remove the endbell, grommets, and ferrule from the receptacle. Remove the endbell, grommet, ferrule, and coupling nut from the plug. Slide the hardware over the wire bundle in the proper order for reassembly after all the contacts are inserted.
- To assist insertion of contacts, lubricate insert cavities with isopropyl alcohol. Alcohol will evaporate and will not leave a conductive film. **Caution: Never use any lubricant other than isopropyl alcohol.** Hold the plug or receptacle body firmly and insert the wired contacts as far as possible by hand. Starting at one side of the insulator, work progressively from contact to contact across the layout. When inserting socket contacts, be sure to provide fixture space below the front face to permit length of guide pins for #16 and #12 contacts to clear insulator face.
- Place the correct insertion tool on the contact so that the wire runs along the groove in the tool. (Tool tip will butt against the shoulder.)
- Beginning with a cavity on the outer edge of the plug, apply a slow, even pressure perpendicular to the insulator face until the contact snaps into position. If contacts are not inserted all the way prior to removing insertion tool, do not try to reinsert the insertion tool. Instead, using the extraction tool, push the contact back to position it was in when the insertion tool was originally placed over the contact for push-in; otherwise the inside of contact cavity may be damaged by reinserting the insertion tool.
- Inspect the front end of the insulator to assure that the contacts are inserted to the proper depth.

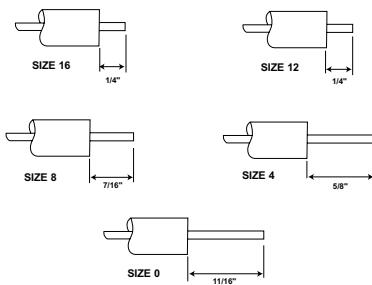
Completion

After all the cavities have been filled, slide the hardware back into position on the barrel. Tighten the endbell until the ferrule and endbell are flush. Compression of the grommet in this manner results in maximum sealing characteristics of the plug.

Extraction of Contacts

- Select the appropriate tool. (Tool tips are reversible for either pin or socket.) Place the extraction tool over the pin or into the socket.
- Apply a slow, even pressure to push the contact out of the rear of the insulator.

Recommended Wire Stripping



Contacts

| Contact Part Numbers | | |
|----------------------|--------------|--------------|
| F80 | | |
| Contact Size | Pin | Socket |
| 16S | 330-0345-016 | 031-0554-161 |
| 16 | 330-0351-016 | 031-0560-161 |
| 12 | 330-0351-012 | 031-0560-121 |
| 8 | 330-0351-008 | 031-0560-081 |
| 4 | 330-0351-004 | 031-0560-041 |
| 0 | 330-0351-000 | 031-0560-001 |

Guide Pins

Guide pins are used to assist insertion of socket contact Sizes #16 and #12. Larger sizes do not require guide pins.

| Contact | Guide Pin |
|---------|--------------|
| #16 | 226-1017-000 |
| #12 | 226-1018-000 |

Wire Hole Fillers

| Size | ITT Cannon Part Number | MS Number |
|------|------------------------|------------|
| 16 | 225-0017-000 | MS25251-16 |
| 12 | 225-0018-000 | MS25251-12 |
| 8 | 225-0019-000 | MS25251-8 |