






Heatsink Details for 510AB

[Heatsink home](#)
[Contact technical sales](#)
[View another heatsink](#)
[Find another heatsink type](#)

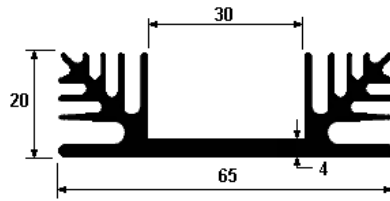

Stock Category A . Profile normally held in stock and available on a short leadtime.

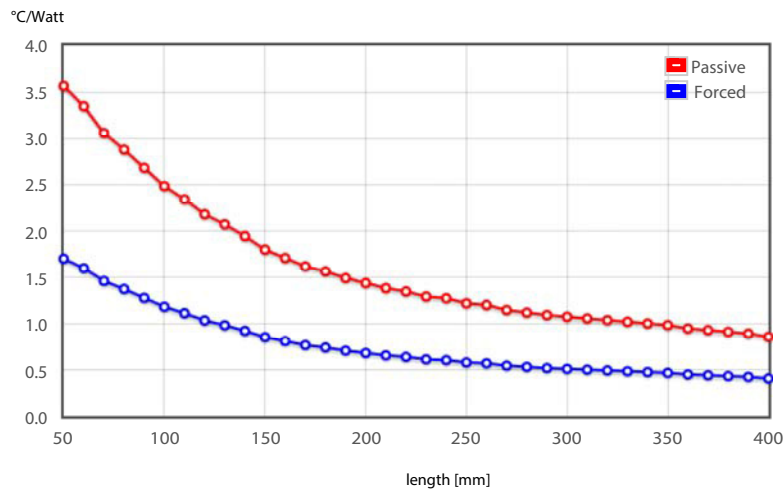

Thermal Performance Results	
Passive [°C/W]	1.800
Forced air flow [°C/W]	0.860

Interactive Performance Graph		
Enter new length [mm]	<input type="text" value="150"/>	Default: 150
Enter new air flow [m/s]	<input type="text" value="2.00"/>	Default: 2
<input type="button" value="Calculate"/>		
Thermal Performance Results above		

Thermal Resistance is calculated based on a distributed heat load on anodised heatsink with vertically mounted fins based on a 60°C temperature rise. Under general operating conditions the thermal mounting arrangement of devices is not known and therefore the figures should be used only as a guide to selection. We recommend that the effectiveness of any heatsink is tested in the specific operating environment in which it will be subjected. All information is for reference purposes only.