

The essential guide Preventa machine safety

helping you easily
select the right product

2009



Schneider
 **Electric**

Preventa

Ingenious and innovative, Preventa safety solutions provide maximum protection for all the safety functions of your automation system.


Select Preventa:

- To export your machines to any location in the world, you expect solutions that are both *approved* and *conform* to international standards.
- To maintain productivity, you need solutions *quickly* to assist you, irrespective of the circumstances.
- You seek *universal* solutions to respond to the diversity of your customers' requirements and, at the same time, *optimise* your stock.

9

Since a perfect safety system does not exist, the latest standards relating to functional safety and voluntary application provide new risk management methods to be used from the design stage by applying principles such as the safety integrity level (SIL) as well as extensively using established operating safety concepts.

Full safety chain:

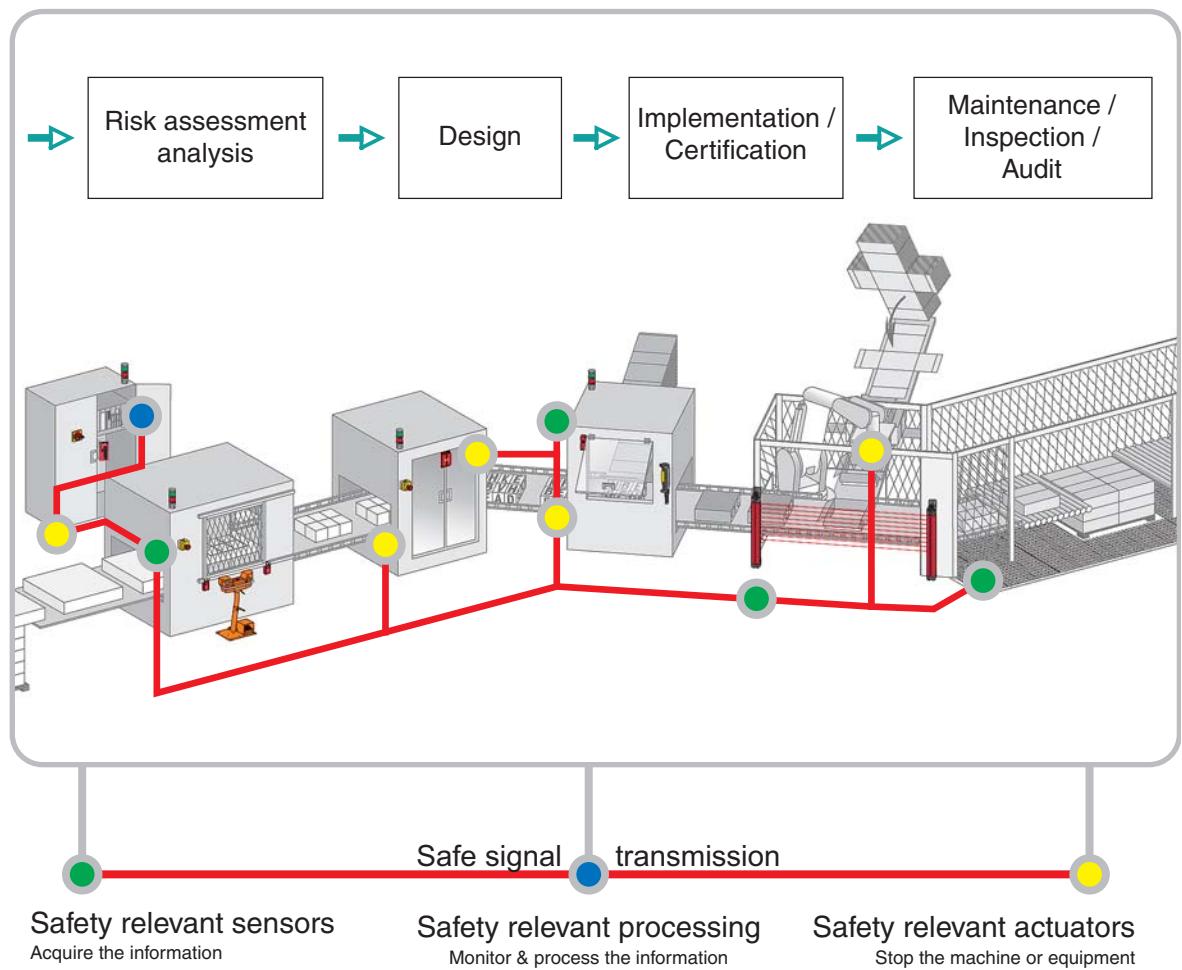

9 | Machine safety



WARNING

This document is a selection of
the top selling products.

Safety standards 2 to 9

Automation 6 to 11

- Safety PLCs
- Safety controllers and modules

AS-Interface Safety at work 12 and 13

- Safety monitors and interfaces

Detection 14 to 21

- Safety switches
- Safety limit switches
- Coded magnetic technology
- Safety mats
- Safety light curtains


Operator dialogue 22 to 26

- Emergency stops
- Foot switches
- Two-hand control and enabling switches

Motor control 27 to 29

- Switch disconnectors
- TeSys motor starters


Functional safety: Safety integrity level (SIL), Performance level (PL)

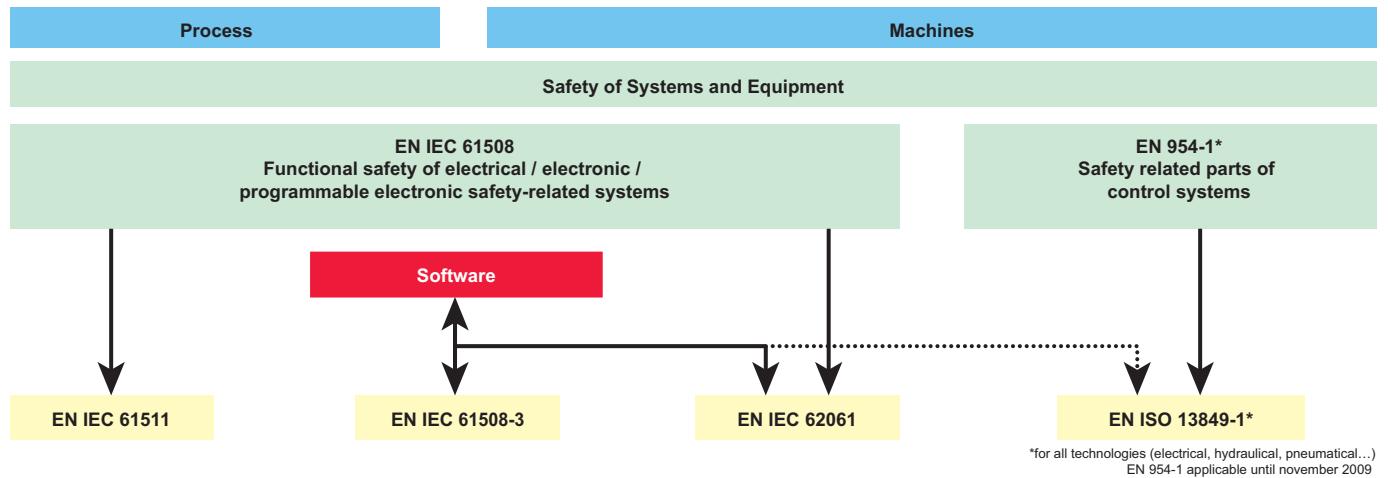

Risk reduction according to EN IEC 61508


- **Safety** is achieved by risk reduction (for those hazards that cannot be designed-out).
- **Residual risk** is the risk remaining after protective measures have been taken.
- **Protective measures** realised by E/E/PE* safety related systems contribute to risk reduction.

* Electric / Electronic / Programmable electronic

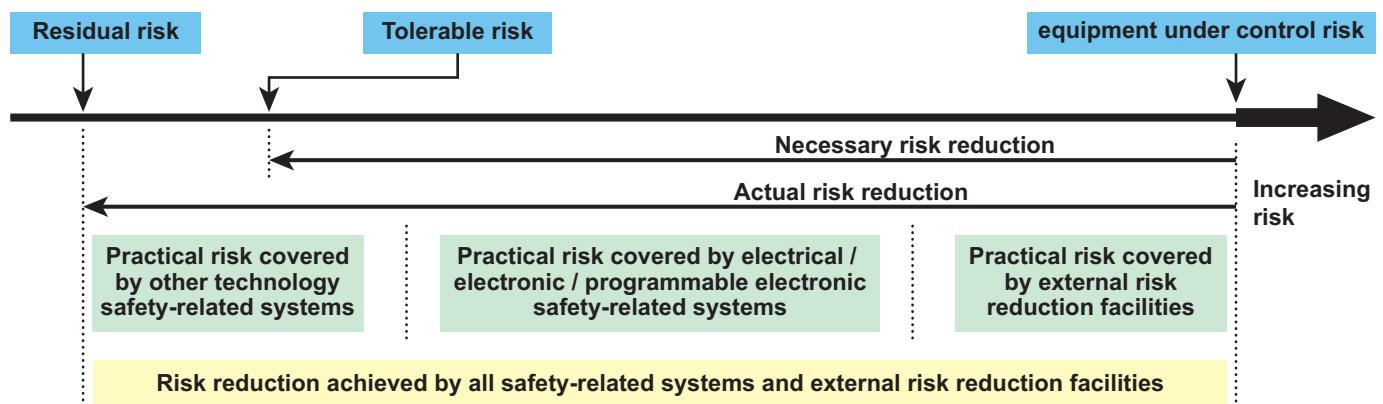

Functional safety of machinery: approach according to EN IEC 62061

Risk estimation for SIL assignment

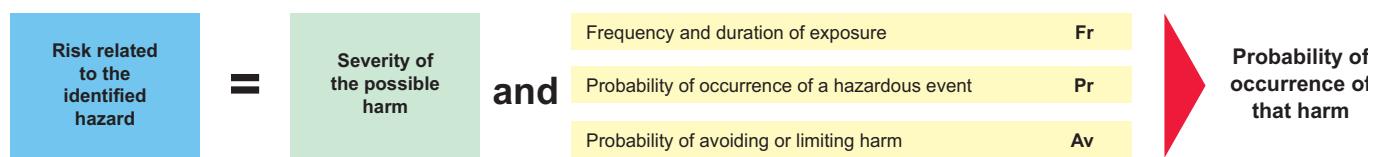

SIL assignment

This assignment should be carried by determining the risk parameters that are shown below in an example.

Consequences	Severity (Se)
Irreversible: death, losing an eye or arm	4
Irreversible: broken limb(s), losing a finger(s)	3
Reversible: requiring attention from a medical practitioner	2
Reversible: requiring first aid	1

Frequency and duration of exposure (Fr)	
Frequency of exposure	Duration
1 h	> 10 min
> 1 h to 1 day	5
> 1 day to 2 weeks	4
> 2 weeks to 1 year	3
> 1 year	2

Probability of occurrence	Probability (Pr)
Very high	5
Likely	4
Possible	3
Rarely	2
Neeglible	1

Probability of a voiding or limiting harm (Av)	
Impossible	5
Rarely	3
Probable	1

Serial no.	Hazard	Se	Fr	Pr	Av	CI
1	Hazard x	4	5	+	4	+
2					3	= 12

In this example the SIL 3 must be achieved by the safety-related control function intended to reduce the risk related to the identified hazard.

Determination of the SIL level achieved by the Safety-related control function (SRCF)

According to standard EN IEC 62061 for each safety related control function, the SIL level is link to:

- a target failure value for the probability of dangerous failure by hour of the SRCF: PFHD
 - architectural constraints (hardware fault tolerance, diagnostic)
 - a set of requirements related to the lifecycle of the safety related electrical control system

Safety integrity level SIL	High demand or continuous mode of operation (Probability of a dangerous failure per hour) PFHD
3	10^{-8} to $< 10^{-7}$
2	10^{-7} to $< 10^{-6}$
1	10^{-6} to $< 10^{-5}$

λ_s = rate of safe failures,
 λ_{dd} = rate of detected dangerous failures,
 λ_{du} = rate of undetected dangerous failures

In practice, detected dangerous failure are dealt with by fault reaction functions

- The rate of failures λ can be expressed as follows:
$$\lambda = \lambda_s + \lambda_{dd} + \lambda_{du}$$
 - The calculation of the PFHD for a system or subsystem depends on several parameters:
 - the dangerous failure rate (λ_d) of the subsystem elements
 - the fault tolerance (e.g. redundancy) of the system
 - the diagnostic test interval (T2)
 - the proof test interval (T1) or lifetime whichever is smaller
 - the susceptibility to common cause failures (β)
 - For each of the four different logical architectures A to D there is a different formula to calculate the PFHD. (see EN IEC 62061)
(For a simple system without redundancy and without diagnostic:
$$PFHD = \lambda_d \times 1h$$

$$\lambda_d = \lambda_{dd} + \lambda_{du}$$

Functional safety of machinery: approach according EN ISO 13849-1

Determination of the Performance Level requested (PL_r)

This determination could be done using the risk graph.

S = Severity of injury


S1 = Slight (normally reversible injury)
S2 = Serious (normally irreversible) injury including death

F = Frequency and/or exposure time to the hazard

F1 = Seldom to less often and/or the exposure time is short
F2 = Frequent to continuous and/or the exposure time is long

P = Possibility of avoiding the hazard or limiting the harm

P1 = Possible under specific conditions
P2 = Scarcely possible

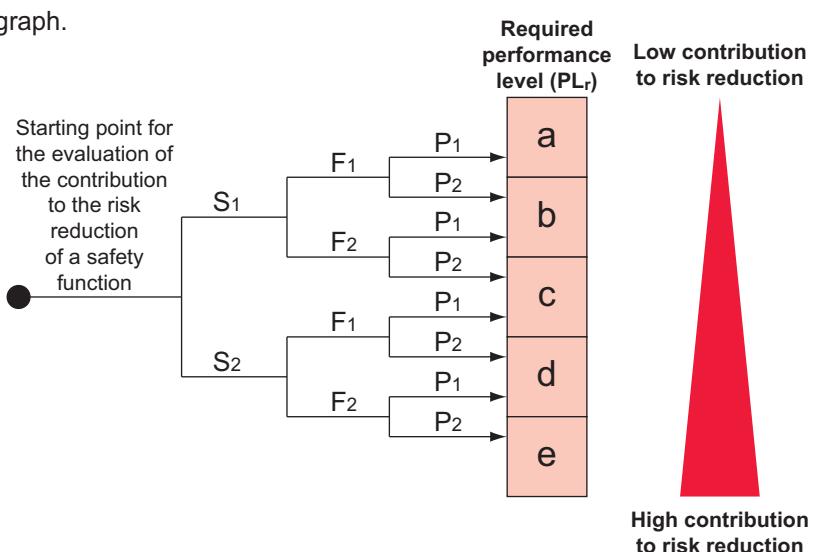


Determination of the PL achieved by the Safety-related parts of control systems (SRP/CS)

According to standard EN ISO 13849-1, the Performance level (PL) is linked to a target failure value of probability of dangerous failure per hour for each safety related control function.

PL	Probability of dangerous failures per hour
a	$\geq 10^{-5} \dots < 10^{-4}$
b	$\geq 3 \times 10^{-6} \dots < 10^{-5}$
c	$\geq 10^{-6} \dots < 3 \times 10^{-6}$
d	$\geq 10^{-7} \dots < 10^{-6}$
e	$\geq 10^{-8} \dots < 10^{-7}$

For a SRP/CS (or a combination of SRP/CS) designed according the requirements of the article 6, the PL could be estimated with the figure below after estimation of several factors such system structure (categories), mechanism of failures detection [Diagnostic Coverage (DC)], components reliability [mean time to dangerous failure (MTTF_d), Common Cause Failure (CCF)]...

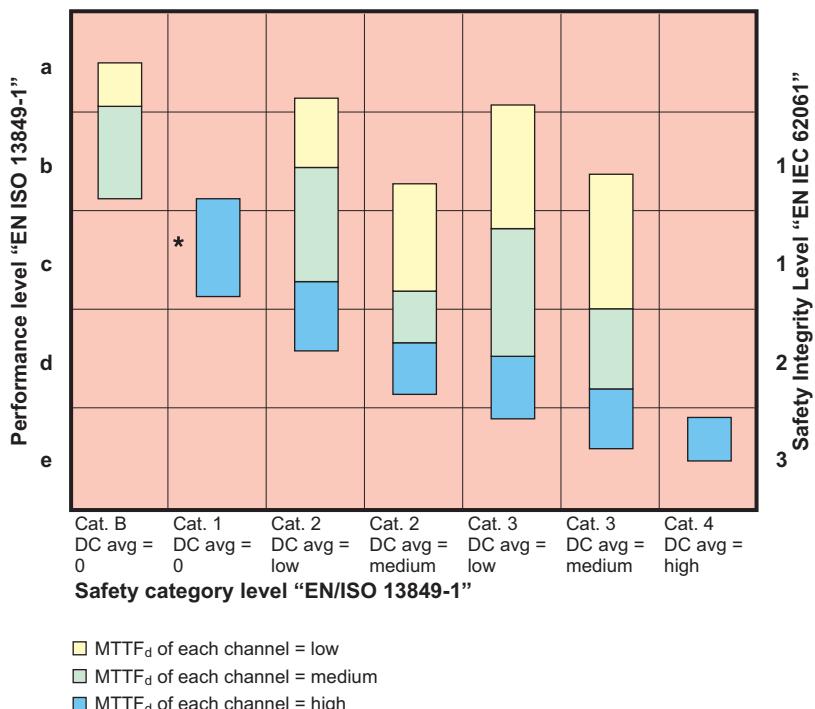

* In several applications the realization of performance level c by category 1 may not be sufficient. In this case a higher category e.g. 2 or 3 should be chosen.

More details please consult safety functions and solutions catalogue according to Preventa, or our internet site: www.schneider-electric.com.

SafetySuite V2 software



■ Protect Area Design

Safety light curtains and sensing mats configuration software.

SafetySuite V2 software incorporates 4 software applications for machine safety, it is available in 4 complete versions and 3 versions updated, adapted to your particular needs:

SafetySuite V2 comprising Protect Area Design (full version) and demo versions of the 3 other software applications.

Reference: **SISCD104200**



■ ASI SWIN

AS-Interface safety monitor configuration software.

SafetySuite V2 comprising Protect Area Design and ASI SWIN (full versions) and demo versions of the other 2 software applications.

Reference: **ASISWIN2**

ASISWIN update version comprising the new ASISWIN 2+, only if the previous version of Safety Suite V1 with ASISWIN2 version 2.0.3 (ref: ASISWIN) have been already installed.

Reference: **SSVASISWINUP**



■ XPS MCWIN

XPS MC safety controllers configuration software.

SafetySuite V2 comprising Protect Area Design, ASI SWIN and XPS MCWIN (full versions) and demo version of XPS MFWIN.

Reference: **XPSMCWIN**

XPSMCWIN update version comprising the new XPSMCWIN 2.10, only if the previous version of Safety Suite V1 with XPSMCWIN version 2.0 (ref: XPSMCWIN) have been already installed.

Reference: **SSVXPSMCWINUP**



■ XPS MFWIN

XPS MF safety PLCs programming software.

SafetySuite V2 comprising Protect Area Design, ASI SWIN, XPS MCWIN and XPS MFWIN (full versions).

Reference: **SSV1XPSMFWIN**

XPSMFWIN update version comprising the new XPSMFWIN 4.1 build 6150, only if the previous version of Safety Suite V1 with XPSMFWIN version 4.1 (ref: SSV1XPSMFWIN) have been already installed.

Reference: **SSVXPSMFWINUP**

For all XPSMF PLCs

- Maximum category of the solution **Category 4**
(EN 954-1)
- Max performance level for the solution **PL e**
(EN ISO 13849-1)
- Max safety integrity level for the solution **SIL 3**
(EN IEC 62061)



Safety PLC type		Compact					
Number of inputs/outputs	Digital (configurable with XPSMFWIN software)	24					
	Pulsed (1)	2x4					
Memory capacity	Application	250 Kb					
	Data	250 Kb					
Supply	External 24 VDC supply (with separate protection conforming to IEC 61131-2)						
Communication	On Ethernet network with safe Ethernet protocol	Integrated (2xRJ45)					
	On Modbus TCP/IP	—	Integrated (2xRJ45)	—	Integrated (2xRJ45)	—	Integrated (2xRJ45)
	On Modbus (Serial link)	—	—	Integrated (1xRJ45)	Integrated (1xRJ45)	—	—
	On Profibus DP	—	—	—	—	Integrated (SUB-D9)	Integrated (SUB-D9)
Input/output connections	Removable screw terminal blocks or removable cage clamp terminal blocks coded with locating device						
References	XPSMF4000	XPSMF4002	XPSMF4020	XPSMF4022	XPSMF4040	XPSMF4042	


(1) They outputs are not safety outputs.

Compact



Safety PLC type		Compact					
Number of inputs	Digital	20	20	24	24	24	24
	Analogue	—	—	8	8	8	8
	Counting	—	—	2	2	2	2
Number of outputs	Digital	8	8	8	8	8	8
	Analogue	—	—	—	—	—	—
	Relay	—	—	—	—	—	—
Memory capacity	Application	250 Kb					
	Data	250 Kb					
Supply	External 24 VDC supply (with separate protection conforming to IEC 61131-2)						
Communication	On Ethernet network (Modbus TCP/IP)	Integrated (4xRJ45)					
	On Modbus (Serial link)	Integrated (SUB-D9)	—	—	Integrated (SUB-D9)	—	
	On Profibus DP	—	—	—	—	—	Integrated (SUB-D9)
Input/output connections	Removable screw terminal blocks, coded with locating device						
References (2)	XPSMF3022	XPSMF31222	XPSMF3502	XPSMF3522	XPSMF3542		

(2) Products referenced XPSMF30/MF31/MF35 are marked Himatrix F30, F31 and F35.

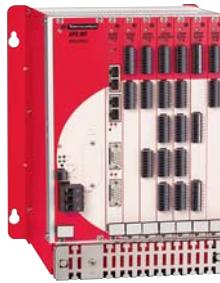

For all XPSMF PLCs

- Maximum category of the solution **Category 4**
(EN 954-1)
- Max performance level for the solution **PL e**
(EN ISO 13849-1)
- Max safety integrity level for the solution **SIL 3**
(EN IEC 62061)

Type	CPU	Power supply module	Rack with 6 slots	Software
Memory capacity	Application	500 Kb	—	For XPSMF PLCs
	Data	500 Kb	—	
Supply	—	External 24 VDC, integrated	—	Complete version SSV1XPSMFWIN
	On Ethernet network (Modbus TCP/IP)	Integrated (4xRJ45)	—	
Communication	On Modbus bus (Serial link)	Integrated (SUB-D9)	—	(1) Update version SSVXPSMFWINUP
	—	Screw terminal blocks	Screw terminal blocks	
Dimensions W x D x H	—	—	257 x 239 x 310 mm	
References	XPSMFCPU22	XPSMFP01	XPSMFGEH01	



I/O module type	For modular safety PLC						
	Analogue	Digital					Relay
Number of inputs	Digital	—	—	24	32	24	—
	Analogue	8	—	—	—	—	—
	Counting	—	—	2	—	—	—
Number of outputs	Digital	—	—	4	—	—	16
	Analogue	—	8	—	—	—	—
	Relay	—	—	—	—	—	8
Supply	Removable screw terminal blocks, coded with locating device						
References	XPSMFAI801	XPSMFA0801	XPSMFCIO2401	XPSMFDI2401	XPSMFDI3201	XPSMFDI0241601	XPSMFD0801

Decentralised safety I/O modules



Module type	Inputs/Outputs				
	Digital				
Number of inputs	Digital	16	8+2	16	20
Number of outputs	Digital	—	8	8	8
	Pulsed	4	2	2	—
Supply	External 24 VDC supply (with separate protection conforming to IEC 61131-2)				
Communication	On Safe Ethernet network (Modbus TCP/IP)				
Input/output connections	Integrated (2xRJ45)				
References (2)	XPSMF1DI1601	XPSMF3DIO8801	XPSMF3DIO16801	XPSMF3DIO20802	




I/O module type	Inputs/Outputs	Outputs	Digital			Relay
	Analogue	Digital				
Number of inputs	Analogue	8	—	—	—	—
Number of outputs	Digital	—	4	16	—	—
	Analogue (not safety)	4	—	—	—	—
	Relay	—	—	—	8	16
Supply	External 24 VDC supply (with separate protection conforming to IEC 61131-2)					
Communication	On Safe Ethernet network (Modbus TCP/IP)					Integrated (2xRJ45)
Input/output connections	Removable screw terminal blocks, coded with locating device					
References (2)	XPSMF3AI08401	XPSMF2DO401	XPSMF2DO1601	XPSMF2DO801	XPSMF2DO1602	

(1) To be ordered only if the previous version of have been already installed.

(2) Products referenced **XPSMF1/MF2/MF3** are marked **Himatrix F1, F2 and F3**.

For all XPSMC controllers

- Max performance level for the solution (EN ISO 13849-1)PL e
- Max safety integrity level for the solution (EN IEC 62061)SIL 3

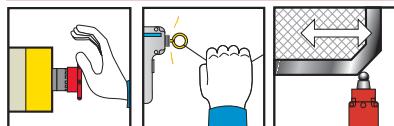

Universal



**Maximum category of the solution
(EN 954-1)**

Category 4

Number of circuits	Safety	2 x 2N/O + 6 solid-state	2 x 3N/O per function
	Additional	–	3 solid-state
Display (number of LEDs)		30	12
Width of housing		74 mm	45 mm
Communication interface	Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (1)(2)	XPSMC32ZC (1)(2)	XPSMC32ZP (1)(2)	XPSMP11123P (3)
----------------	--------	-----------------	------------------	------------------	-----------------

**coded magnetic switches
enabling switch**



Universal



**Maximum category of the solution
(EN 954-1)**

Category 4

For monitoring		magnetic switches and enabling switch	
Number of circuits	Safety	2 x 2N/O + 6 solid-state	2 x 3N/O per function
	Additional	–	3 solid-state
Display (number of LEDs)		30	12
Width of housing		74 mm	45 mm
Communication interface	Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage	24 VDC	XPSMC32Z (1)(2)	XPSMC32ZC (1)(2)	XPSMC32ZP (1)(2)	XPSMP11123P (3)
----------------	--------	-----------------	------------------	------------------	-----------------

safety mats and edging



Universal



**Maximum category of the solution
(EN 954-1)**

Category 3

Number of circuits	Safety	2 x 2N/O + 6 solid-state	2 x 3N/O per function
	Additional	–	3 solid-state
Display (number of LEDs)		30	12
Width of housing		74 mm	45 mm
Communication interface	Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)


Supply voltage	24 VDC	XPSMC32Z (1)(2)	XPSMC32ZC (1)(2)	XPSMC32ZP (1)(2)	XPSMP11123P (3)
----------------	--------	-----------------	------------------	------------------	-----------------

(1) Version with 32 inputs. For version with 16 inputs, replace 32 in the reference by 16 (example: XPSMC32Z becomes XPSMC16Z).

(2) Configuration software XPSMCWIN (complete version) or SSVXPSMCWINUP (update version), connecting cable, adaptor and set of screw terminal plug-in connectors XPSMCTS16 and XPSMCTS32 or set of spring clip terminal plug-in connectors XPSMCTC16 and XPSMCTC32 to be ordered separately.

(3) For fixed connector version, delete the letter P from the end of the reference (example: XPSMP11123P becomes XPSMP11123).

Safety modules for monitoring emergency stops and limit switches

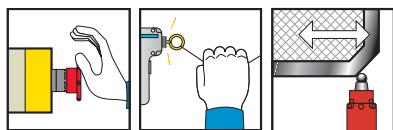


Maximum category of the solution (EN 954-1)		Category 3	Category 4				
Number of circuits	Safety	3N/O	3N/O	3N/O	7N/O	3N/O+3N/O time del.	2N/O+3N/O time del.
	Additional	1 solid-state	–	1N/C + 4 solid-state	2N/C + 4 solid-state	3 solid-state	4 solid-state
Display (number of LEDs)		2	3	4	4	11	4
Width of housing		22.5 mm	22.5 mm	45 mm	90 mm	45 mm	45 mm

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage (1)	24 VDC	–	–	–	XPSAV11113P	–
	24 VAC/DC	XPSAC5121P	XPSAF5130P	XPSAK311144P	XPSAR311144P	–
	230 VAC	–	–	–	–	XPSATE3710P

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSAV11113P becomes XPSAV11113).

coded magnetic switches enabling switch

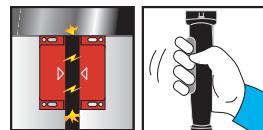

Maximum category of the solution (EN 954-1)		Category 4		
For monitoring		2 coded magnetic switches maximum	6 coded magnetic switches maximum	enabling switch
Number of circuits	Safety	2N/O	2N/O	2N/O
	Additional	2 solid-state	2 solid-state	2 solid-state
Display (number of LEDs)		3	15	3
Width of housing		22.5 mm	45 mm	22.5 mm

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	XPSDMB1132P (1)	XPSDME1132P (1)	XPSVC1132P (1)
----------------	--------	-----------------	-----------------	----------------

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSDMB1132P becomes XPSDMB1132).

safety mats and edging



Maximum category of the solution (EN 954-1)		Category 3	
Number of circuits	Safety	3N/O	
	Additional	1N/C + 4 solid-state	
Display (number of LEDs)		4	
Width of housing		45 mm	


Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VAC/DC	XPSAK311144P (1)
----------------	-----------	------------------

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSAK311144P becomes XPSAK311144).

For all XPSMC controllers

- Max performance level for the solution (EN ISO 13849-1) PL e
- Max safety integrity level for the solution (EN IEC 62061) SIL 3



Universal



**Maximum category of the solution
(EN 954-1)**

Category 4

Number of circuits	Safety	2 x 2N/O + 6 solid-state		
	Additional	–		
Display (number of LEDs)		30		
Width of housing		74 mm		
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage

24 VDC


XPSMC32Z (1)(2)

XPSMC32ZC (1)(2)

XPSMC32ZP (1)(2)



light curtains

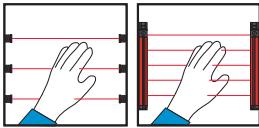

Universal



**Maximum category of the solution
(EN 954-1)**

Category 4

Number of circuits	Safety	2 x 2N/O + 6 solid-state	2x3N/O per function	2 light curtains monitoring max.
	Additional	–	3 solid-state	1 PNP + 1 NPN
Display (number of LEDs)		30	12	14 + double display units
Width of housing		74 mm	45 mm	100 mm
Integral Muting function		Yes	No	Yes
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP
			–	–

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage

24 VDC

XPSMC32Z(1)(2)

XPSMC32ZC(1)(2)

XPSMC32ZP(1)(2)

XPSMP11123P (3)


XPSLCM1150 (4)

(1) Version with 32 inputs, for version with 16 inputs, replace 32 in the reference by 16 (example: XPSMC32Z becomes XPSMC16Z).

(3) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSMP11123P becomes XPSMP11123).

(4) Removable terminal blocks

zero speed, time delay

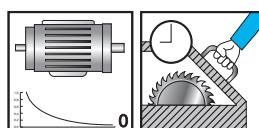

Universal



**Maximum category of the solution
(EN 954-1)**

Category 4

For monitoring		Motor zero speed condition		
Number of circuits	Safety	2 x 2N/O + 6 solid-state		
	Additional	–		
Display (number of LEDs)		30		
Width of housing		74 mm		
Communication interface		Modbus	Modbus, CANopen	Modbus, Profibus DP

Universal solutions: safety controllers (for monitoring several safety functions simultaneously)

Supply voltage

24 VDC

XPSMC32Z (5) (2)


XPSMC32ZC (5) (2)

XPSMC32ZP (5) (2)

(2) Configuration software XPSMCWIN (complete version) or SSVXPSMCWINUP (update version), connecting cable, adaptor and set of screw terminal plug-in connectors XPSMCTS16 and XPSMCTS32 or set of spring clip terminal plug-in connectors XPSMCTC16 and XPSMCTC32 to be ordered separately.

(5) Plug-in connector version only.

Safety modules for monitoring two-hand control




Maximum category of the solution (EN 954-1)	Category 1 (type IIIA to EN 574)	Category 4 (type IIIC to EN 574)	
Number of circuits	Safety	1N/O	2N/O
	Additional	1N/C	1N/C
Display (number of LEDs)		2	3
Width of housing	22.5 mm	45 mm	22.5 mm

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	–	XPSBC1110	XPSBF1132P (1)
	24 VAC/DC	XPSBA5120	–	–

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSBF1132P becomes XPSBF1132).

light curtains

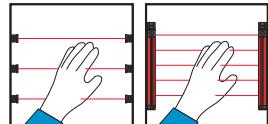


Maximum category of the solution (EN 954-1)	Category 2	Category 4		
Number of circuits	2N/O	3N/O	3N/O	7N/O
	4 solid-state	–	1N/C + 4 solid-state	1N/C + 4 solid-state
Display (number of LEDs)	4	3	4	4
Width of housing	45 mm	22.5 mm	45 mm	90 mm
Integral Muting function	Yes	No	No	No

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	XPSCM1144P (1)	–	–	–
	24 VAC/DC	–	XPSAFL5130P (1)	XPSAK311144P (1)	XPSAR311144P (1)

(1) For version with non removable terminal block, delete the letter P from the end of the reference (example: XPSCM1144P becomes XPSCM1144).

zero speed, time delay and lifts

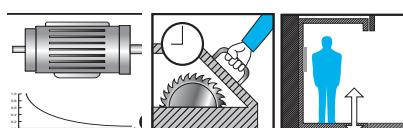

Maximum category of the solution (EN 954-1)	Category 3	Category 4	
For monitoring	Motor zero speed condition	Safety time delay	Lifts
Number of circuits	1N/O + 1N/C	1N/O time delay	2N/O
	2 solid-state	2N/C + 2 solid-state	2 solid-state
Display (number of LEDs)	4	4	4
Width of housing	45 mm	45 mm	45 mm

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 VDC	XPSVNE1142P (1)	–	–	–
	24 VAC/DC	–	XPSTSA5142P (2)	XPSTSW5142P (2)	XPSDA5142

(1) Motor frequency \leq 60 Hz.. For frequencies \geq 60 Hz, please refer to the "Safety solution" catalogue.

(2) Removable terminal block version only.

For all ASISAFEMON monitors

- Max performance level for the solution PL e
(EN ISO 13849-1)
- Max safety integrity level for the solution SIL 3
(EN IEC 62061)



Maximum category of the solution (EN 954-1)		Category 4	
Number of circuits	Safety	2N/O	2 x 2N/O
	Auxiliary	1 solid-state	2 solid-state
Display (number of LEDs)		5	8
Width of housing		45 mm	45 mm
AS-Interface profile		S.7.F	S.7.F
Master module compatibility		V1 / V2.1	V1 / V2.1
References of monitor with	enhanced functions	ASISAFEMON1B	ASISAFEMON2B
	standard functions	ASISAFEMON1	ASISAFEMON2

Configuration software, adjustment terminal and AS-Interface analyser



Type	“Safety Suite” configuration software (1)	Adjustment terminal (2)	AS-Interface Analyser
Multilingual	EN / FR / DE / ES / IT / PT	–	■ Analysis and diagnostics of AS-Interface line and Safety at Work
For use with	ASISAFEMON1/2, ASISAFEMON1B/2B	–	■ Complements the diagnostic functions of the local AS-Interface master
Media	CD-ROM PC	–	■ Maintenance or validation of AS-Interface lines
Environment	Windows	–	■ Print-out of AS-Interface line tests
Degree of protection	–	IP 40	92 x 28 x 139 mm
Supply	–	4 x LR6 batteries	
Dimensions W x D x H	–	70 x 50 x 170 mm	
References	Complete version Update version (3)	ASISWIN2 SSVASICWINUP	ASISA01

(1) CD-ROM with hardware and software user guides.

(2) For addressing safety interfaces, use the infrared adaptor ASITERIR1 or the standard adaptor ASISAD1.

(3) To be ordered only if a previous version of ASISWIN have been already installed.

Accessories



Type	Adaptor for the addressing of safety interfaces	Infrared adaptor for adjustment terminal	Tap-off for AS-Interface cable	Cable for monitor parametering, RS 232	Cable for monitor to monitor transfer
Degree of protection	–	IP 67	IP 67	IP 20	IP 20
Cable length	–	1 m	2 m	2 m	0.2 m
References	ASISAD1	ASITERIR1	TCSATN01N2	ASISCPC	ASISCM

Safety interfaces

For Ø 22 Emergency stop



Interface type	For mushroom head pushbuttons				Control stations	
	Metal	(1)	Plastic	(1)	Plastic	
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 65	IP 65
Dimensions W x D x H (mm)	40 x 90 x 68	40 x 80 x 40	40 x 90 x 64	40 x 90 x 40	66 x 95 x 78	66 x 95 x 78
AS-Interface profile	S.O.B.F.F	S.O.B.F.F	S.O.B.F.F	S.O.B.F.F	S.O.B.F.F	S.O.B.F.F
Consumption from AS-Interface	45 mA	45 mA	45 mA	45 mA	45 mA	45 mA
Infrared addressing	Yes	No	Yes	No	No	No
Connection on AS-Interface	IDC (2)	Connector	IDC (2)	Connector	M12 connector	M12 connector
Reference with N/C + N/C contact (head not included)	ASISSLB4	ASISSLE4	ASISSLB5	ASISSLE5	ASISEA1C	ASISEK1C
Reference of head (Ø40 latching mushroom head, turn to release)	ZB4BS844 (3)	ZB4BS844 (3)	ZB4AS844 (3)	ZB5AS844 (3)	Integrated (4)	Integrated (5)

(1) For installation in enclosures.

(2) IDC: Insulation Displacement Connector.

(3) Head to be ordered separately. For other heads, please refer to www.schneider-electric.com.

(4) Turn to release latching mushroom head.

(5) Key release (n° 455) latching mushroom head.

For other safety products with M12 connector outputs or ISO M16/20




Type of entry	2 x M12 entries (6)	1 x M12 entry	1 x ISO M16 entry (7)
Degree of protection	IP 67	IP 67	IP 67
Dimensions W x D x H	40 x 40 x 58 mm	40 x 40 x 58 mm	40 x 40 x 57.5 mm
AS-Interface profile	S.O.B.F.F	S.O.B.F.F	S.O.B.F.F
Consumption from AS-Interface	45 mA	45 mA	45 mA
Infrared addressing	Yes	Yes	Yes
Connection on AS-Interface	IDC (1)	IDC (1)	IDC (1)
References	ASISSLC2	ASISSLC1	ASISSLLS


(6) For connection using 2 pre-wired connectors, or 1 pre-wired connector + 1 connector.

(7) For 1 x ISO M20 entry, use adaptor shown below.

Accessories

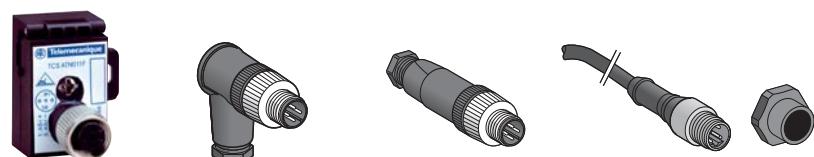

Type	Tap-off for AS-Interface cable	Connectors	Pre-wired connector	Adaptor (sold in lots of 5)
Description	M12 female, threaded	elbowed	straight	ISO M16/M20
Degree of protection	IP 67	IP 67	IP 67	IP 67
Length of cable	–	–	–	–
References	TCSATN011F	XZCC12MCM40B	XZCC12MDM40B	XZCP1541L2
				DE9RI2016


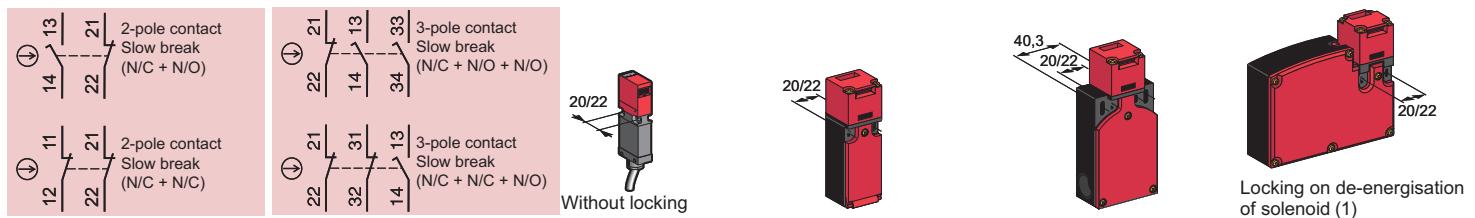


Plastic, double insulated switches	Type XCSMP pre-cabled, L = 2 m	Type XCSPA and TA 1xISO M16 entry. (2)	Type XCSTA 2xISO M16 entries. (2)	Type XCSTE 1x ISO M16 cable entry (2)
Actuation speed (min → max)	0,05 m/s → 1,5 m/s	0,1 m/s → 0,5 m/s		0,1 m/s → 0,5 m/s
Degree of protection	IP 67	IP 67		IP 67
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC 15, C 300 / DC 13, Q 300	AC 15, A 300 / DC 13, Q 300		AC 15, B 300 / DC 13, Q 300
Dimensions (body + head) W x D x H	30 x 15 x 87 mm	30 x 30 x 93,5 mm	52 x 30 x 114,5 mm	110 x 33 x 93,5 mm
Solenoid supply voltage	—	—	—	24 VAC/DC
Complete switch	"N/C+N/O" stag. slow break XCSMP59L2 (3) ⊖ "N/C+N/C" slow break XCSMP79L2 (3) ⊖ "N/C+N/C+N/C" slow break XCSMP70L2 (3) ⊖ "N/C+N/C+N/C" snap action — "N/C+N/C+N/C" slow break XCSMP80L2 (3) ⊖ "N/C+N/C+N/C" snap action —	"N/C+N/O" slow break XCSPA592 ⊖ "N/C+N/C" slow break XCSPA792 ⊖ "N/C+N/C+N/C" slow break XCSPA892 ⊖ "N/C+N/C+N/C" snap action — "N/C+N/C+N/C" slow break XCSPA992 ⊖ "N/C+N/C+N/C" snap action XCSPA492 ⊖	"N/C+N/O" slow break XCSTA592 ⊖ "N/C+N/C" slow break XCSTA792 ⊖ "N/C+N/C+N/C" slow break XCSTA992 ⊖ "N/C+N/C+N/C" snap action —	"N/C+N/O" slow break XCSTE5312 ⊖ "N/C+N/C" slow break XCSTE7312 ⊖ "N/C+N/C+N/C" slow break XCSTE5312 ⊖ "N/C+N/C+N/C" snap action —

(1) For locking on energisation of solenoid, please refer to www.schneider-electric.com.

(2) With entry for n° 11 (Pg 11) cable gland, replace the last digit in the reference by 1 (example: XCSPA592 becomes XCSPA591).

(3) For other models, please refer to www.schneider-electric.com.

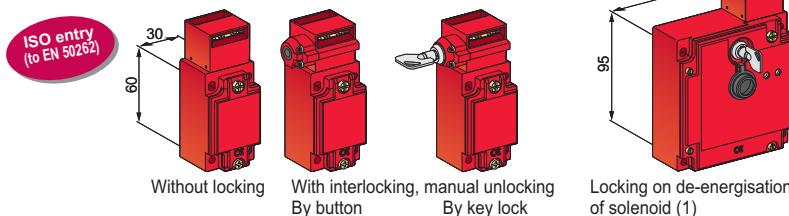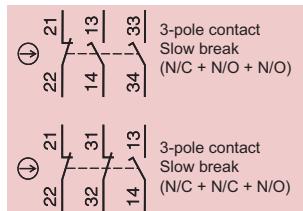


Metal switches	Type XCSA/B/C 1 x ISO M20 cable entry (2)	Type XCSE 2 x ISO M20 cable entries (2)
Actuation speed (min → max)	0.1 m/s → 0.5 m/s	0.1 m/s → 0.5 m/s
Degree of protection	IP 67	IP 67
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC 15, A 300 / DC 13, Q 300	AC 15, B 300 / DC 13, Q 300
Dimensions (body + head) W x D x H	40 x 44 x 113,5 mm	52 x 44 x 113,5 mm
Solenoid supply voltage	—	24 VAC/DC
Complete switch	N/C + N/O + N/O slow break XCSA502 ⊖ N/C + N/C + N/O slow break XCSA702 ⊖	XCSB502 ⊖ XCSC502 ⊖ XCSE5312 ⊖ XCSE7312 ⊖ XCSB702 ⊖ XCSC702 ⊖ XCSE7312 ⊖ XCSE7332 ⊖ XCSE7342 ⊖

(1) For locking on energisation of solenoid, please refer to www.schneider-electric.com.

(2) With entry for n° 13 (Pg 13.5) cable gland, replace the last digit in the reference by 1 (example: XCSA502 becomes XCSA501).


Accessories

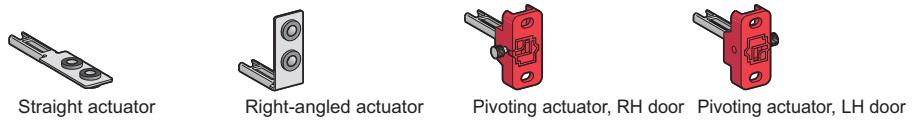


For safety switches XCSMP	Actuators			
References	XCSZ81	XCSZ84	XCSZ83	XCSZ85
	Straight actuator	Wide actuator L=40 mm (1)	Right-angled actuator	Pivoting actuator
				Guard/door retainer
References	Actuators			Retaining device
(1) For L = 29 mm, reference = XCSZ15.	XCSZ11	XCSZ12	XCSZ14	XCSZ13

For safety switches XCSA/B/C/E	Actuators			
References	XCSZ01	XCSZ02	XCSZ03	Door lock

Safety switches with rotary lever or spindle

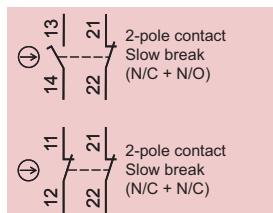

ISO entry
(to EN 50262)

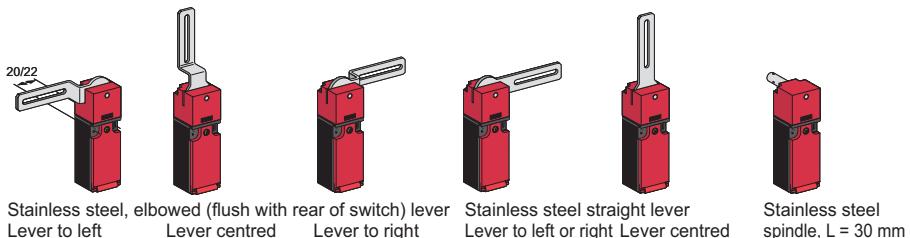


Plastic switches


		Type XCSPL with rotary lever or XCSPR with spindle				
		1 x ISO M16 cable entry (1)				
Minimum torque (actuation / positive opening)		0,1 / 0,25 N.m				
Degree of protection		IP 67				
Rated operational characteristics		AC 15, A 300 / DC 13, Q 300 (selon EN IEC 60947-5-1)				
Dimensions (body + head) W x D x H		30 x 30 x 160 mm				30 x 30 x 96 mm
Tripping angle		5°				
Complete switch	"N/C+N/O" stag. slow break	XCSPL592 ⊖	XCSPL582 ⊖	XCSPL572 ⊖	XCSPL562 ⊖	XCSPR552 ⊖
	"N/C+N/C" slow break	XCSPL791 (2) ⊖	XCSPL781 (2) ⊖	XCSPL771 (2) ⊖	XCSPL762 ⊖	XCSPR752 ⊖
	"N/C+N/C+N/C" slow break	-	-	-	XCSPL862 ⊖	-
	"N/C+N/C+N/C" slow break	-	XCSPL981 (2) ⊖	-	XCSPL962 ⊖	XCSPR952 ⊖

(1) With entry for n° 11 (Pg 11) cable gland, replace the last digit in the reference by 1 (example: XCSPL592 becomes XCSPL591).

(2) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).

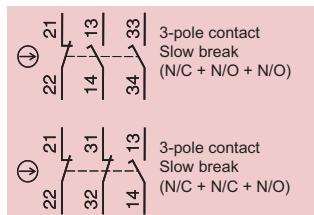


ISO entry
(to EN 50262)

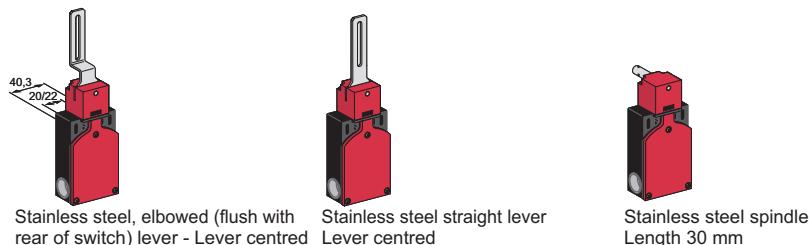

Plastic switches

		Type XCSTL with rotary lever or XCSTR with spindle		
		2 x ISO M16 cable entries (1)		
Minimum torque (actuation / positive opening)		0.1 / 0.45 N.m		
Degree of protection		IP 67		
Rated operational characteristics		AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)		
Dimensions (body + head) W x P x H		52 x 30 x 180 mm		52 x 30 x 117 mm
Tripping angle		5°		
Complete switch	N/C + N/O + N/O, 2 N/O staggered slow break	XCSTL582 ⊖	XCSTL552 ⊖	XCSTR552 ⊖
	N/C + N/C + N/O, N/O staggered slow break	XCSTL782 ⊖	XCSTL752 ⊖	XCSTR752 ⊖

(1) With entry for n° 11 (Pg 11) cable gland, replace the last digit in the reference by 1 (example: XCSTL582 becomes XCSTL581).

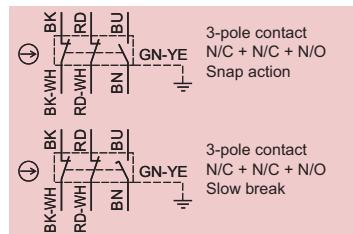

Metal
end plunger



Roller plunger



Thermoplastic
roller lever


Miniature switches

Type XCSM, metal pre-cabled, L = 1 m (1)

Maximum actuation speed	0.5 m/s	0.5 m/s	1.5 m/s
Minimum force or torque (actuation / positive opening)	8.5 N / 42.5 N	7 N / 35 N	0.5 N.m / 0.1 N.m
Degree of protection	IP 66 + IP 67 + IP 68	IP 66 + IP 67 + IP 68	IP 66 + IP 67 + IP 68
Dimensions (body + head) W x D x H	30 x 16 x 60 mm	30 x 16 x 70.5 mm	30 x 32 x 92.5 mm
Complete switch	N/C + N/C + N/O snap action XCSM3910L1	N/C + N/C + N/O slow break XCSM3710L1	N/C + N/C + N/O snap action XCSM3902L1
			XCSM3702L1
			XCSM3915L1
			XCSM3715L1

(1) For a 2 m long cable, replace the last digit of the reference by 2 (example: XCSM3910L1 becomes XCSM3910L2).

For a 5 m long cable, replace the last digit of the reference by 5 (example: XCSM3910L1 becomes XCSM3910L5).

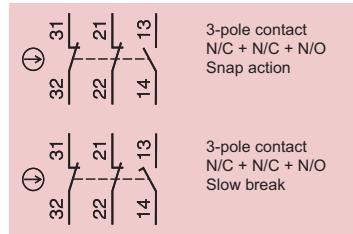

Metal
end plunger



Roller
plunger



Thermoplastic
roller lever



Metal
end plunger



Roller
plunger



Thermoplastic
roller lever

Compact switches

Type XCSD, metal


1 x ISO M20 x 1.5 cable entry (2)

Type XCSP, plastic

1 x ISO M20 x 1.5 cable entry (2)



Maximum actuation speed	0.5 m/s	1.5 m/s	0.5 m/s	1.5 m/s
Minimum force or torque (actuation / positive opening)	15 N / 45 N	12 N / 36 N	10 N.m / 0.1 N.m	15 N / 45 N
Degree of protection	IP 66 + IP 67		IP 66 + IP 67	
Dimensions (body + head) W x D x H (mm)	34 x 34.5 x 89	34 x 34.5 x 99.5	34 x 43 x 121.5	34 x 34.5 x 89
Complete switch	N/C + N/C + N/O snap action XCSD3910P20	N/C + N/C + N/O slow break XCSD3710P20	N/C + N/C + N/O snap action XCSD3902P20	N/C + N/C + N/O slow break XCSD3702P20
			XCSD3918P20	XCSP3910P20
			XCSD3718P20	XCSP3902P20
			XCSP3710P20	XCSP3702P20
			XCSP3718P20	XCSP3718P20

(2) For Pg 13.5 and 1/2" NPT cable entries, refer to www.schneider-electric.com.

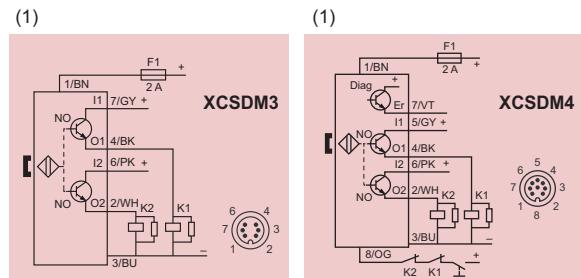

Type of system With integrated safety module	SIL2/Category 3 XCSDM3	Sil3/Category 4 XCSDM4		
Switches for actuation	Face to face, face to side, side to side			
Degree of protection	Pre-cabled: IP66 / IP67, IP69K, connector: IP67			
Type of contact	2 solid-state output PNP/NO, 1,5 A / 24VDC (2 A up to 60°C)			
Rated operational characteristics	Ub: 24 VDC +10% - 20%			
Dimensions W x D x H	34 x 27 x 100 mm			
Operating zone	Sao= 10 mm / Sar= 20 mm			
References	Connection	for cable L= 2m	XCSDM379102	XCSDM480102
		for cable L= 5m	XCSDM379105	XCSDM480105
		for cable L= 10m	XCSDM379110	XCSDM480110
		for connector M12	XCSDM3791M12	XCSDM4801M12

Coded magnetic

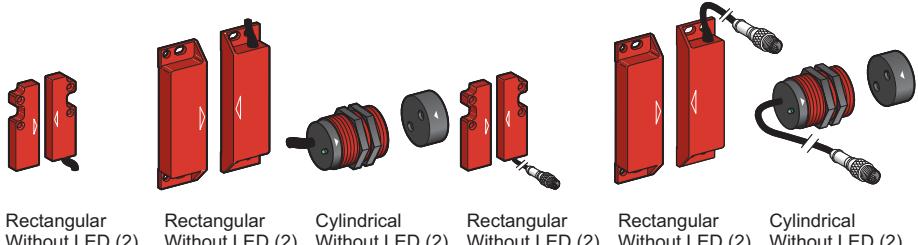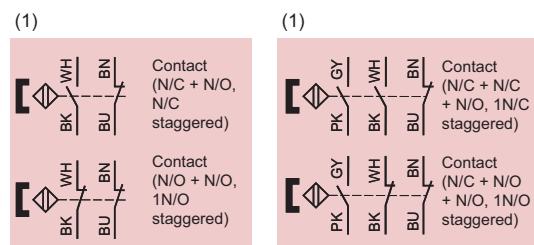


Plastic switches		Type XCSDM coded magnetic			Connector on flying lead, L = 10 cm (3)		
		Pre-cabled, L = 2 m					
Switches for actuation		Face to face, face to side, side to side			Face to face		
Degree of protection		IP 66 + IP 67			IP 66 + IP 67		
Type of contact		REED			REED		
Rated operational characteristics		Ue = 24 VDC, Ie = 100 mA			Ue = 24 VDC, Ie = 100 mA		
Dimensions W x D x H		16 x 7 x 51 mm	25 x 13 x 88 mm	M30 x 38,5 mm	16 x 7 x 51 mm	25 x 13 x 88 mm	M30 x 38.5 mm
Operating zone (4)		Sao = 5 / Sar = 15	Sao = 8 / Sar = 20		Sao = 5 / Sar = 15	Sao = 8 / Sar = 20	
Switch with coded magnet	N/C + N/O, N/C staggered	XCSDMC5902	XCSDMP5902	XCSDMR5902	XCSDMC590L01M8	XCSDMP590L01M12	XCSDMR590L01M12
	N/O + N/O, 1N/O staggered	XCSDMC7902	XCSDMR7902	XCSDMR7902	XCSDMC790L01M8	XCSDMP790L01M12	XCSDMR790L01M12
	N/C + N/C + N/O, 1N/C staggered	—	XCSDMP5002	—	—	XCSDMP500L01M12	—
	N/C + N/O + N/O, 1N/O staggered	—	XCSDMP7002	—	—	XCSDMP700L01M12	—

(1) NB. Contact states shown are with the magnet present.

(2) For version with LED indicator, replace the last 0 in the reference by 1 (example: XCSDMC5902 becomes XCSDMC5912).

(3) For associated pre-wired female connectors, please refer to the "Safety solution" catalogue.

(4) Sao: assured operating distance. Sar: assured release distance.

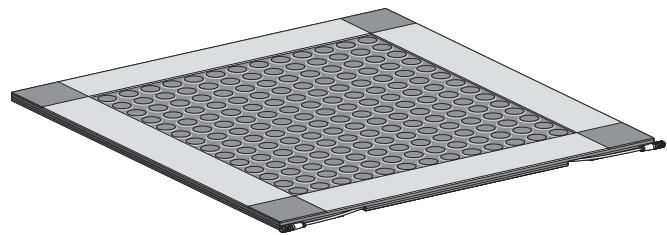

(1) For simplification of installation, see the "Protect Area design" software configuration tool. Reference: SISCD104200

Maximum category usage (EN 954-1)	Category 3			
Degree of protection	IP 67			
Response time (s)	Mat itself: 20 ms, with module: XPSAK ≤ 40 ms, XPSMP < 30 ms			
Sensitivity	Single mat > 20 kg / Group of mats > 35 kg			
Maximum load	2000 N/cm ²			
Connection (2)	By M8 jumper cable (1 male / 1 female), L = 100 mm			
Dimensions W x D x H	500 x 500 x 11 mm	500 x 750 x 11 mm	750 x 750 x 11 mm	750 x 1250 x 11 mm
References	XY2TP1	XY2TP2	XY2TP3	XY2TP4

(2) For associated jumper cable and pre-wired connector, please refer to www.schneider-electric.com

Accessories										
Rails (set of 2)	Length	194 mm	394 mm	444 mm	494 mm	644 mm	694 mm	744 mm	1194 mm	1244 mm
References		XY2TZ10	XY2TZ20	XY2TZ30	XY2TZ40	XY2TZ50	XY2TZ60	XY2TZ70	XY2TZ80	XY2TZ90
Corners and rail connectors	External corners (set of 4)	XY2TZ4	XY2TZ5	Internal corner + external corner		Rail connectors, L = 56 mm with outlet for cable (set of 2)	Rail connectors, L = 6 mm (set of 2)			
References						XY2TZ1	XY2TZ2			

Light curtains

Type 2 conforming to IEC 61496-2



Light curtain functions

- Auto/Manual,
- Monitoring of external switching devices (EDM: External Devices Monitoring),
- LED display of operating modes

Type	Multi-beam, infrared transmission	
Slim range	Manual starting	Automatic starting
Nominal sensing distance (Sn)	0.3...15 m	
Detection capacity	30 mm "hand"	
Number of safety circuits	2 solid-state PNP	
Response time (depending on model)	14...24 ms	
Connection	M12 Connector	
Height protected (mm)		
150	XUSLNG5D0150	XUSLNG5C0150
300	XUSLNG5D0300	XUSLNG5C0300
450	XUSLNG5D0450	XUSLNG5C0450
600	XUSLNG5D0600	XUSLNG5C0600
750	XUSLNG5D0750	XUSLNG5C0750
900	XUSLNG5D0900	XUSLNG5C0900
1050	XUSLNG5D1050	XUSLNG5C1050
1200	XUSLNG5D1200	XUSLNG5C1200
1350	XUSLNG5D1350	XUSLNG5C1350
1500	XUSLNG5D1500	XUSLNG5C1500

	Accessories		
Cable length	3 m	10 m	30 m
Pre-wired connector for XUSLN	For receiver (screened cable)	XSZNCR03	XSZNCR10
	For transmitter	XSZNCT03	XSZNCT10
			XSZNCT30

Type 2 conforming to IEC 61496-1 et 2



Light curtain functions

- Auto/Manual,
- Monitoring of external switching devices (EDM: External Devices Monitoring),
- LED display of operating modes
- Integral muting function.

Type	Single-beam, infrared transmission	
Height protected (conforming to prEN 999)	750...1200 mm (1 to 4 beams)	
Nominal sensing distance (Sn)	8 m	
Number of circuits	Safety	2N/O
	Additional	4 solid-state
Response time	< 25 ms	
Modules (integral muting function)	24 VDC	XPSCM1144P (1)
Thru-beam pairs, axially aligned	Pre-cabled, L = 5m M12 connector	XU2S18PP340L5 (2) XU2S18PP340D (2)

(1) For version with non removable terminal block, delete the letter P from the end of the reference. Example: XPSCM1144P becomes XPSCM1144.

(2) For alignment at 90° to the mounting axes, insert the letter W in the reference before the last letter. Example: XU2S18PP340L5 becomes XU2S18PP340WL5).



Functions accessible by cabling alone

- Automatic start
- Auxiliary output (PNP, status signalling)
- Alignment aid by display of each light beam broken
- LED display of operating modes and faults

Type		Multi-beam, infrared transmission Light curtains		Cascadable light curtains	
Nominal sensing distance (Sn)		0,3...7 or 3 m with PDM Box (2)	0,3...8 or 20 m with PDM Box (2)	0,3...7 or 3 m with PDM Box (2)	0,3...20 or 8 m with PDM Box (2)
Detection capacity		14 mm "finger"	30 mm "hand"	14 mm "finger"	30 mm "hand"
Number of circuits	Safety	2 solid-state PNP		2 solid-state PNP	
	Auxiliary (alarm)	1 solid-state PNP		1 solid-state PNP or NPN	
Response time (depending on model)		23...41 ms	23...32 ms	23...41 ms	23...32 ms
Connection		M12 connector			
Functions accessible via programming and diagnostic module		<ul style="list-style-type: none"> ■ Auto/Manual ■ Monitoring of external switching devices (EDM: External Device Monitoring) ■ Test (MTS : Monitoring Test Signal), ■ Light beam coding (A or B) ■ Sensing distance (short, long) ■ Programming and downloading of configuration settings, via programming and diagnostic module (PDM) ■ Display of operating modes and faults by LED and/or PDM (2) 		<ul style="list-style-type: none"> ■ Auto/Manual, manual 1st cycle ■ Monitoring of external switching devices (EDM: External Device Monitoring) ■ Test (MTS : Monitoring Test Signal), ■ Blanking (ECS/B), Monitored Blanking, Floating Blanking (FB) ■ Reduction of resolution ■ Response time (normal, slow) ■ Light beam coding (A or B) ■ Sensing distance (short, long) ■ Auxiliary output (alarm or status signalling, PNP or NPN) ■ Start button (N/O or N/C, 0 V or 24 V) ■ Muting ■ Display of operating modes and faults by LED and/or PDM (2) 	
Transmitter + receiver	(1) Height protected (mm)	280	XUSLBQ6A0280	XUSLDMQ6A0280	-
		320	-	XUSLDMQ6A0320	-
		360	XUSLBQ6A0360	XUSLBR5A0360	-
		440	XUSLBQ6A0440	XUSLDMQ6A0440	-
		520	XUSLBQ6A0520	XUSLDMQ6A0520	XUSLDMY5A0520
		600	XUSLBQ6A0600	XUSLDMQ6A0600	-
		680	-	XUSLBR5A0680	-
		720	XUSLBQ6A0720	XUSLDMQ6A0720	-
		880	XUSLBQ6A0880	XUSLBR5A0880	XUSLDMQ6A0880
		1040	-	XUSLBR5A1040	-
		1200	-	XUSLBR5A1200	-
		1400	-	XUSLBR5A1400	-
		1560	-	XUSLBR5A1560	XUSLDMY5A1560

Type		Segments for cascadable light curtains	
Detection capacity		14 mm "finger"	30 mm "hand"
Transmitter + receiver	Height protected (mm)	280	XUSLDSQ6A0280
		320	XUSLDSQ6A0320
		360	-
		440	XUSLDSQ6A0440
		520	XUSLDSQ6A0520
		600	XUSLDSQ6A0600
		680	-
		720	XUSLDSQ6A0720
		880	XUSLDSQ6A0880
		1040	-
		1400	-
		1560	-

Type 4 conforming to IEC 61496-2



Light curtain functions

- Auto/Manual/Manual 1st cycle
- Monitoring of external switching devices (EDM: External Devices Monitoring),
- Test input (MTS: Monitoring Test Signal),
- Alignment aid by LED display of each light beam broken,
- LED display of operating modes and alarms,
- Coding of the beams

Type			Single-beam and multi-beam, infrared transmission			
Compact range			Transmitter/receiver	Transmitter/passive receiver		
Nominal sensing distance (Sn)			0.8...20 ou 70 m (according to config)	0.8...8 m		
Detection capacity			Body			
Number of circuits	Safety		2 solid-state PNP			
	Auxiliary (alarm or following)		1 solid-state PNP			
Response time (depending on model)			16...24 ms			
Connection			M12 Connector (1)	M12 Connector		
Beam	Interval	Number				
			1 XUSLPZ1AM	—		
			4 XUSLPZ4A300M	—		
			5 XUSLPZ5A300M	—		
			6 XUSLPZ6A300M	—		
			3 XUSLPZ3A400M	—		
			2 XUSLPZ2A500M	XUSLPB2A500M		
			3 XUSLPZ3A500M	—		
			2 XUSLPZ2A600M	XUSLPB2A600M		

(1) Light curtain with M12 connector output, for terminal block output, replace M from the end of the reference by B. Example : XUSLPZ1AM becomes XUSLPZ1AB



Cabling accessories

Type	Pre-wired connectors						
Cable length	5 m	10 m	15 m	30 m			
Pre-wired connector for (screened cable)	XUSLT	For receiver	XSZTCR05	XSZTCR10	XSZTCR15	XSZTCR30	
		For transmitter	XSZTCT05	XSZTCT10	XSZTCT15	XSZTCT30	
	XUSLB/XUSLDM	For receiver	XSZBCR05	XSZBCR10	XSZBCR15	XSZBCR30	
		For transmitter	XSZBCT05	XSZBCT10	XSZBCT15	XSZBCT30	
	XUSLP	For receiver	XSZPCR05	XSZPCR10	XSZPCR15	XSZPCR30	
		For transmitter	XSZPCT05	XSZPCT10	XSZPCT15	XSZPCT30	
Type	Jumper cables for segments XUS LDS						
Cable length	0,3 m	0,5 m	1 m	2 m	2 m	5 m	10 m
Reference	For receiver	XSZDCR003	XSZDCR005	XSZDCR010	XSZDCR020	XSZDCR030	XSZDCR050
	For transmitter	XSZDCT003	XSZDCT005	XSZDCT010	XSZDCT020	XSZDCT030	XSZDCT050
						XSZDCT00	XSZDCT100

Setting-up accessories




Type	Programming and Diagnostic Module	Laser alignment tool
For light curtains	XUSLB / XUSLDM	All type XUSL
Reference	XUSLPDM	XUSLAT1

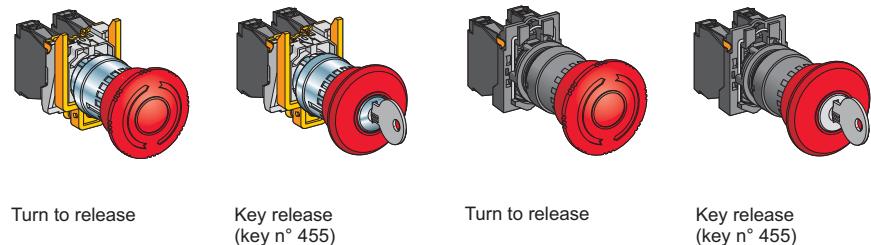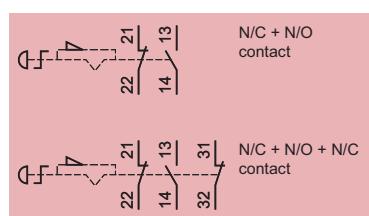

Pushbuttons	Metal	Plastic
Mechanical life (millions of operating cycles)	0.3	0.3
Shock / vibration resistance	10 gn / 5 gn	10 gn / 5 gn
Degree of protection	IP 65	IP 65
Rated operational characteristics	AC 15, A 600 / DC 13, Q 600 (conforming to EN IEC 60947-5-1)	
Dimensions Ø x Depth	Ø 40 x 82 mm	Ø 40 x 104 mm
Contact	N/C + N/O 2 N/C + 1 N/O	XB4BS8445 XB4BS84441
		XB5AS8445 XB5AS9445 ZB5AS944 + ZB5AZ141

Ø 22 trigger action latching pushbutton stations

ISO entry
(to EN 50262)

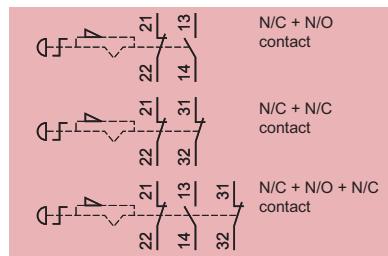


Enclosure	Plastic
	2 x ISO M20 cable entries or n° 13 (Pg 13.5) cable gland
Mechanical life (millions of operating cycles)	0.1
Shock / vibration resistance	10 gn / 5 gn
Degree of protection	IP 65
Rated operational characteristics	AC 15, A 600 / DC 13, Q 600 (conforming to EN IEC 60947-5-1)
Dimensions W x D x H	68 x 91 x 68 mm
Contact	N/C + N/O N/C + N/C 2 N/C + 1 N/O
	XALK178E XALK178F XALK188E XALK188F XALK188G

Accessories



With legend holder

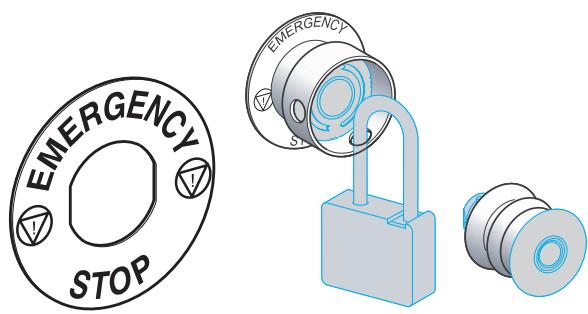



Type	Étiquettes	Padlocking kit	Bellows seals
Colour	Red with white lettering	Yellow	Red Silicone
Dimensions	30 x 40 mm (1)	Ø 60 mm	Black EPDM
Références	Marking: "Emergency stop" ZBY2130 "Arrêt d'urgence" ZBY2330 "Not Halt" ZBY2230	ZBY9130 ZBY9330 ZBY9230	– – –
	–	–	ZBZ3605
			ZBZ48
			ZBZ28

(1) circular appearance

Emergency stops

Cable (tripwire) operated

ISO entry
(to EN 50262)



Booted pushbutton reset



Key release pushbutton reset (key n° 421)





with indicator light

For operating cable length ≤ 15 m

	Latching, without indicator light	with indicator light
1 x ISO M20 cable entry (1)		
Mechanical life (millions of operating cycles)	0.01	
Shock / vibration resistance	50 gn / 10 gn	
Degree of protection	IP 65	
Rated operational characteristics	AC-15, A300 / DC-13, Q300 (conforming to EN IEC 60947-5-1)	
Dimensions W x D x H	201 x 71 x 68 mm	
Operating cable length	≤ 15 m	
Operating cable anchoring point	To right or to left	
Contact	1 "N/C + N/O" slow break XY2CH13250H29	XY2CH13450H29 XY2CH13253
	1 "N/C + N/C" slow break XY2CH13270H29	XY2CH13470H29 XY2CH13273

(1) With entry for n° 13 (Pg 13.5) cable gland, delete H29 from the end of the reference (example: XY2-CH13250H29 becomes XY2-CH13250).



Booted pushbutton reset



Key release pushbutton reset (key n° 421)



For operating cable length ≤ 50 m

	Latching, without indicator light			
3 x ISO M20 cable entries or n° 13 (Pg 13.5) cable gland				
Mechanical life (millions of operating cycles)	0.01	0.01		
Shock / vibration resistance	50 gn / 10 gn	50 gn / 10 gn		
Degree of protection	IP 65	IP 65		
Rated operational characteristics	AC-15, A300 / DC-13, Q300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H	229 x 82 x 142 mm	229 x 82 x 142 mm		
Operating cable length	≤ 50 m	≤ 50 m		
Operating cable anchoring point	To left	To right	To left	To right
Contact	1 "N/C + N/O" slow break XY2CE2A250	XY2CE1A250	XY2CE2A450	XY2CE1A450
	1 "N/C + N/C" slow break XY2CE2A270	XY2CE1A270	XY2CE2A470	XY2CE1A470
	2 "N/C + N/O" slow break XY2CE2A290 (2)	XY2CE1A290 (2)	XY2CE2A490 (2)	XY2CE1A290 (2)

(2) With 24V, 48 V, 130 V pilot lights, BA9S bulb not included, add 6 at the end of the reference. (example : XY2CE1A290 becomes XY2CE1A296).

With 230 V pilot lights, BA9S bulb included, add 7 at the end of the reference. (example : XY2CE1A290 becomes XY2CE1A297).





ISO entry
(to EN 50262)



Type	Foot switches without protective cover			
2 cable entries for n° 16 (Pg 16) cable gland (1)				
Trigger mechanism	With (positive operating action reqd.)	Without		
Colour	Orange	Blue	Orange	
Mechanical life (millions of operating cycles)	15			
Degree of protection	IP 66			
Shock resistance	100 joules			
Rated operational characteristics	AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H	104 x 172 x 59 mm			
Contact operation	1 step	1 N/C + N/O	XPER810	XPEM110
		2 N/C + N/O	XPER811	XPEM111
	2 step	2 N/C + N/O	XPER911	XPEM211
	Analogue output	2 N/C + N/O	XPER929	XPER229

(1) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).

ISO entry
(to EN 50262)





Type	Foot switches without protective cover			
2 cable entries for n° 16 (Pg 16) cable gland (1)				
Trigger mechanism	With (positive operating action reqd.)	Without		
Colour	Blue	Orange	Blue	Orange
Mechanical life (millions of operating cycles)	15			
Degree of protection	IP 66			
Shock resistance	100 joules			
Rated operational characteristics	AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H	160 x 186 x 152 mm			
Contact operation	1 step	1 N/C + N/O	XPEM510	XPER510
		2 N/C + N/O	XPEM511	XPER511
	1 step latching	1 N/C + N/O	–	XPEM410
	2 step	2 N/C + N/O	XPEM711	XPER711
	Analogue output	2 N/C + N/O	XPEM529	XPER529
			XPEM310	XPER310
			XPEM311	XPER311
	–	–	XPER410	XPER410
	2 step	2 N/C + N/O	XPEM611	XPER611
	Analogue output	2 N/C + N/O	XPEM329	–

(1) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).

Double pedal switches

ISO entry
(to EN 50262)





Type	Foot switches without protective cover			
2 cable entries for n° 16 (Pg 16) cable gland (1)				
Trigger mechanism	With (positive operating action reqd.)	Without		
Colour	Blue	Orange	Blue	Orange
Mechanical life (millions of operating cycles)	15			
Degree of protection	IP 66			
Shock resistance	100 joules			
Rated operational characteristics	AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)			
Dimensions W x D x H	295 x 190 x 155 mm			
Contact operation	1 step	2 x 1 N/C + N/O	XPEM5100D	XPER510D
		2 x 2 N/C + N/O	XPEM5110D	XPER5110D
			XPEM3100D	XPER3100D
			XPEM3110D	XPER3110D

(1) For entry for ISO M20 cable gland, also order adaptor DE9RA1620 (sold in lots of 5).




Foot switches - plastic Single pedal switches

ISO entry
(to EN 50262)



Type		Without protective cover	With protective cover
2 cable entries for ISO M20 cable gland			
Trigger mechanism	Without		With (positive operating action reqd.)
Colour	Yellow	Yellow	Yellow
Mechanical life (millions of operating cycles)	5		
Degree of protection	IP 55		
Shock resistance	30 joules		
Rated operational characteristics	AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)		
Dimensions W x D x H	160 x 280 x 70 mm	160 x 280 x 162 mm	160 x 280 x 162 mm
Contact operation	1 step	1 N/C + N/O XPEY110	XPEY310 XPEY510
	2 N/C + N/O	–	XPEY311 XPEY511
	2 step	2 N/C + N/O XPEY211	XPEY611 XPEY711




ISO entry
(to EN 50262)



Type	Foot switches without protective cover		
2 cable entries for ISO M20 cable gland		1 entry (1)	
Trigger mechanism	With (positive operating action reqd.)	Without	Without
Colour	Grey+	Blue	Black
Mechanical life (millions of operating cycles)	10		2
Degree of protection	IP 66		IP 43
Shock resistance	100 joules		
Rated operational characteristics	AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)		
Dimensions W x D x H	160 x 280 x 70 mm		94 x 161 x 54 mm
Contact operation	1 step	1 N/C + N/O XPEG810	XPEB110 XPEA110
	2 N/C + N/O	–	XPEB111 XPEA111
	2 step	2 N/C + N/O XPEG911	XPEB211 XPEG211


(1) Cable entry for ISO M16 or n° 9 (Pg 9) cable gland and for ISO M20 or n° 13 (Pg 13.5) cable gland.

ISO entry
(to EN 50262)




Type	Foot switches with protective cover		
2 cable entries for ISO M20 cable gland			
Trigger mechanism	With (positive operating action reqd.)	Without	
Colour	Grey	Blue	Blue
Mechanical life (millions of operating cycles)	10		
Degree of protection	IP 66		
Shock resistance	100 joules		
Rated operational characteristics	AC 15, A 300 / DC 13, Q 300 (conforming to EN IEC 60947-5-1)		
Dimensions W x D x H	180 x 280 x 162 mm		
Contact operation	1 step	1 N/C + N/O XPEG510	XPEB510 XPEB310
	2 N/C + N/O	XPEG511	XPEB511 XPEB311
	2 step	2 N/C + N/O XPEG711	XPEB711 XPEG611
			XPEB611

ISO entry
(to EN 50262)



2 control pushbuttons and 1 mushroom head Emergency stop or Lock out pushbutton



2 control pushbuttons and 1 mushroom head Emergency stop or Lock out pushbutton, with pre-wired terminal block




Type	Two-hand control stations	
	2 cable entries for ISO M20 or n° 13 (Pg 13.5) cable gland, 1 cable entry for n° 21 (Pg 21) cable gland (2)	
Mechanical life (millions of operating cycles)	1	1
Degree of protection	IP 65	IP 65
Rated operational characteristics	AC 15, A 600 / DC 13, Q 600 (conforming to EN IEC 60947-5-1)	
Dimensions W x D x H	455 x 170 x 188.5 mm	
Red emergency stop (N/C + N/C slow break)	XY2SB71 (1)	XY2SB72 (1)
Yellow lock out (N/C + N/O break before make)	XY2SB75	XY2SB76

(1) To order a two-hand control station with pedestal XY2SB90, add 4 to the end of the reference (example: XY2SB71 becomes XY2SB714).

(2) For entry for ISO M25 cable gland, also order adaptor DE9RA2125 + fixing nut DE9EC21 (sold in lots of 5).

Enabling switch

Contact states

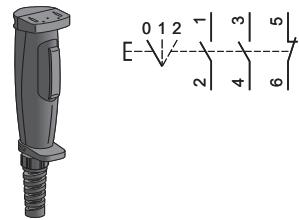
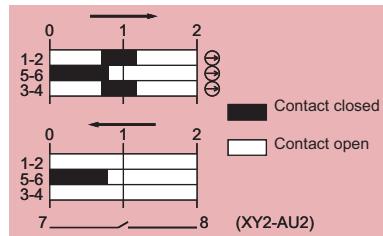


Type	Plastic grip	
	Entry for Ø 7 to 13 mm cable	
Number of contacts	3	3
Type of contacts	2 "NO" + 1 "NC"	2 "NO" + 1 "NC" 1 "NO" auxiliary
Description	3 positions	3 positions with button for N/O contact (auxiliary)
Shock / vibration resistance	10 gn / 6 gn	
Degree of protection	IP 66	IP 65
Rated operational characteristics	AC 15, C300 / DC 13, R300 (conforming to EN IEC 60947-5-1)	
Dimensions W x D x H	46 x 58 x 261 mm	
References	XY2AU1	XY2AU2


For fixing accessories, please refer to www.schneider-electric.com.

Switch disconnectors

Front mounting





Door mounting

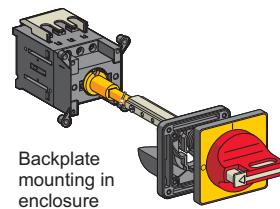

Backplate mounting in enclosure


Type	Mini-Vario for standard applications	
Front plate dimensions (mm)	60 x 60	60 x 60
Fixing	Ø 22.5 mm	Ø 22.5 mm
Degree of protection	IP 20	IP 20
Rated operational voltage (Ue)	690 V	690 V
Thermal current in open air (Ith)	12 A 20 A	VCDN12 VCDN20
		VCCDN12 VCCDN20

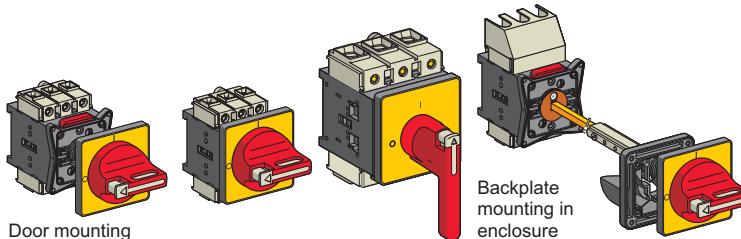


Door mounting

Backplate mounting in enclosure

Type	Vario for high performance applications					
Front plate dimensions (mm)	60 x 60	60 x 60	90 x 90	60 x 60	60 x 60	90 x 90
Fixing	Ø 22.5 mm	4 screws	4 screws	Ø 22.5 mm	4 screws	4 screws
Degree of protection	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Rated operational voltage (Ue)	690 V	690 V	690 V	690 V	690 V	690 V
Thermal current in open air (Ith)	12 A 20 A 25 A 32 A 40 A 63 A 80 A 125 A 175 A	VCD02 VCD01 VCD0 VCD1 VCD2 — — — — —	VCF02 VCF01 VCF0 VCF1 VCF2 VCF3 VCF4 — —	— — — — — — — VCF5 —	VCCD02 VCCD01 VCCD0 VCCD1 VCCD2 — — — — —	VCCF02 VCCF01 VCCF0 VCCF1 VCCF2 VCCF3 VCCF4 — VCCF5 VCCF6




Enclosed




Type	Mini-Vario		Vario	
Front plate dimensions (mm)	60 x 60	60 x 60	90 x 90	
Dimensions W x D x H	82.5 x 106 x 131 mm	90 x 131 x 146 mm	220 x 191 x 280 mm	
Degree of protection	IP 55	IP 65	IP 65	
Rated operational voltage (Ue)	690 V	690 V	690 V	
Thermal current in enclosure (Ithe)	10 A 16 A 20 A 25 A 32 A 50 A 63 A 100 A 140 A	VCFN12GE VCFN20GE VCFN25GE VCFN32GE VCFN40GE — — — — —	VCF02GE VCF01GE VCF0GE VCF1GE VCF2GE VCF3GE (1) VCF4GE (1) — —	— — — — — — — VCF5GE VCF6GE

(1) Dimensions W x D x H: 150 x 152 x 170 mm.




Complete circuit-breaker: circuit-breaker + enclosure + safety device.
Ex.: GV2ME01 + GV2MC02 + GV2K04.



Type	Thermal-magnetic motor circuit-breakers				
Motor power	kW (on 400 V)	–	0.06	0.09	0.12...0.18
Setting range	A	0.1...0.16	0.16...0.25	0.25...0.40	0.40...0.63
Current Id ± 20%	A	1.5	2.4	5	8
Current Ithe (in enclosure)	A	0.16	0.25	0.40	0.63
Reference		GV2ME01	GV2ME02	GV2ME03	GV2ME04
Motor power	kW (on 400 V)	0.37...0.55	0.75	1.1...1.5	2.2
Setting range	A	1...1.6	1.6...2.5	2.5...4	4...6.3
Current Id ± 20%	A	22.5	33.5	51	78
Current Ithe (in enclosure)	A	1.6	2.5	4	6.3
Reference		GV2ME06	GV2ME07	GV2ME08	GV2ME10
Motor power	kW (on 400 V)	5.5	7.5	9...11	11
Setting range	A	9...14	13...18	17...23	20...25
Current Id ± 20%	A	170	223	327	327
Current Ithe (in enclosure)	A	13	17	21	23
Reference		GV2ME16	GV2ME20	GV2ME21	GV2ME22
					GV2ME32



Enclosure




Type	Empty enclosure	
Mounting	Surface mounting	Flush mounting
Degree of protection	IP 55	IP 55 (front face)
Dimensions W x D x H (1)	93 x 145.5 x 147 mm	93 x 55 x 126 mm
References	GV2MC02	GV2MP02

(1) Dimensions with safety device GV2K04 fitted.


Safety device



Type	Safety devices		
With red mushroom head	Turn to release Padlockable in "Off" position	Turn to release	Key release (key n° 455)
References	GV2K04	GV2K031	GV2K021

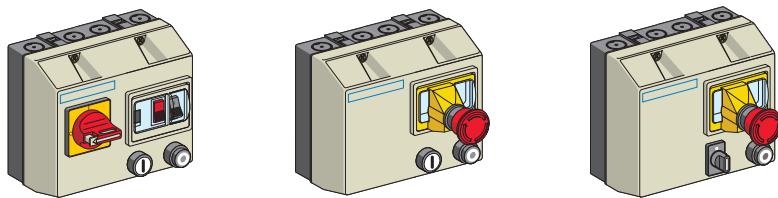

Type	Non reversing				Reversing
Degree of protection	IP 657			IP 657	IP 657
Standard motor power ratings (kW), category AC3					
220/230 V	400/415 V	440 V	Ith setting range (A)		
–	0.06	0.06	0.16...0.25	LG1K065••02	LG8K06••02
0.06	0.09	0.12	0.25...0.40	LG1K065••03	LG8K06••03
–	0.18	0.18	0.40...0.63	LG1K065••04	LG8K06••04
0.12	0.25	0.25	0.63...1	LG1K065••05	LG8K06••05
0.25	0.55	0.55	1...1.6	LG1K065••06	LG8K06••06
0.37	0.75	1.1	1.6...2.5	LG1K065••07	LG8K06••07
0.75	1.5	1.5	2.5...4	LG1K065••08	LG8K06••08
1.1	2.2	3	4...6.3	LG1K065••10	LG8K06••10
1.5	4	4	6...10	LG1K095••14	LG8K09••14
3	5.5	5.5	9...14	LG1D122••16	LG8K12••16
4	7.5	9	13...18	LG1D182••20	LG7D18••20
4	9	9	17...23	LG1D182••21	LG7D18••21

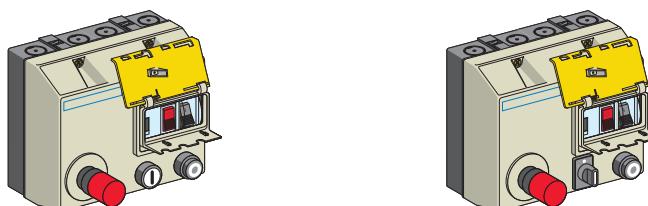

With integral control transformer, 400/24 V

With integral control transformer, 400/24 V

Type	Non reversing		Reversing
Degree of protection	IP 657		IP 657
Standard motor power ratings (kW), category AC3			
380/400 V	Ith setting range (A)	Basic references (The code Q7 (380/400 V) designates the power supply voltage to which the starter will be connected)	
0.06	0.16...0.25	LJ7K06Q702	LJ8K06Q702
0.09	0.25...0.40	LJ7K06Q703	LJ8K06Q703
0.18	0.40...0.63	LJ7K06Q704	LJ8K06Q704
0.25	0.63...1	LJ7K06Q705	LJ8K06Q705
0.55	1...1.6	LJ7K06Q706	LJ8K06Q706
0.75	1.6...2.5	LJ7K06Q707	LJ8K06Q707
1.5	2.5...4	LJ7K06Q708	LJ8K06Q708
2.2	4...6.3	LJ7K06Q710	LJ8K06Q710
4	6...10	LJ7K09Q714	LJ8K09Q714

Control circuit voltages available

Volts 50/60 Hz	24 V	230 V	400 V	415 V
(1) Voltage code	B7	P7	V7	N7

The control circuit must be cabled by the user.

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.schneider-electric.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: IGS-CP
Photos: Schneider Electric
Printed by: