


# APH-161-12-14-E


## Peltier cooler module

### Data sheet

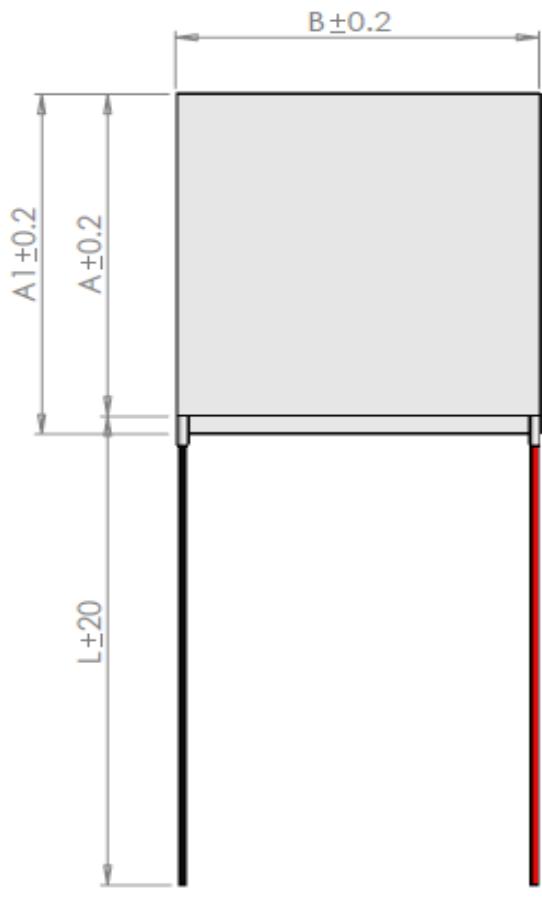

+ Input (Red)

- Input (Black)

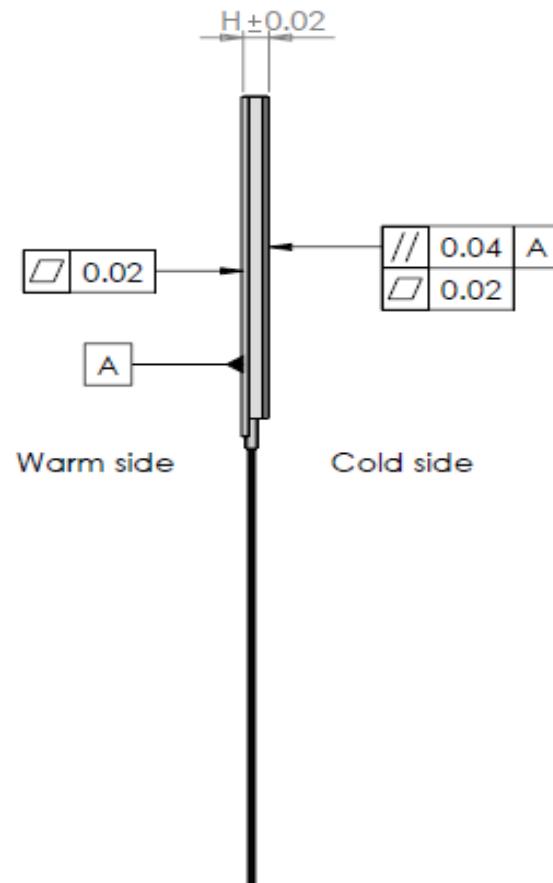

I <sub>max</sub>	[A]	5.1
V <sub>max</sub>	[Vdc]	19.5
P <sub>c</sub> max	[W]	56.3
ΔT <sub>max</sub>	[°C]	69
A	[mm]	40
A <sub>l</sub>	[mm]	40
B	[mm]	40
H	[mm]	3.7
L	[mm]	100
Wire	AWG	n/a

(At hot side temperature  $T_h = 25^\circ\text{C} / 298\text{K}$ , under dry  $\text{N}_2$ ).

P<sub>c</sub> max = Cooling power at  $\Delta T = 0$  and  $I = I_{\text{max}}$ .

ΔT<sub>max</sub> = Temperature difference at  $I = I_{\text{max}}$  and  $P_c = 0$ .





Max hot side temperature  $T_h = 80^\circ\text{C}$  for best long term performance.

Max mounting pressure: 1.5MPa.

Wires: UL-style 1569, 105oC (Unstripped).




## Data sheet - At hot side temperature 25°C

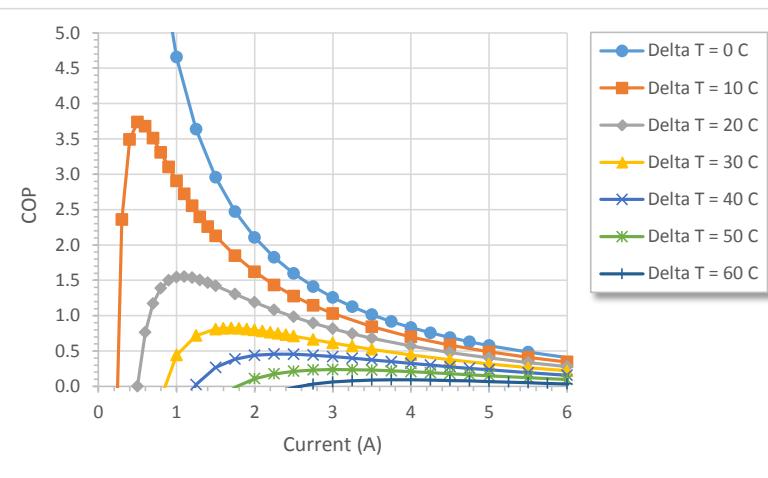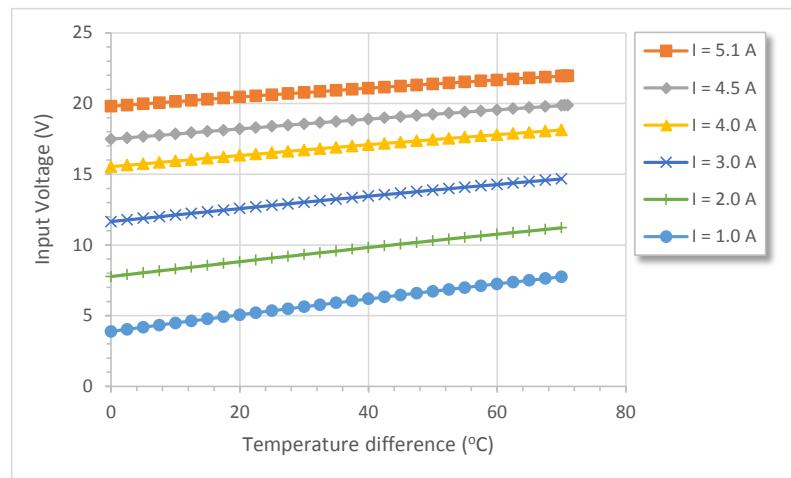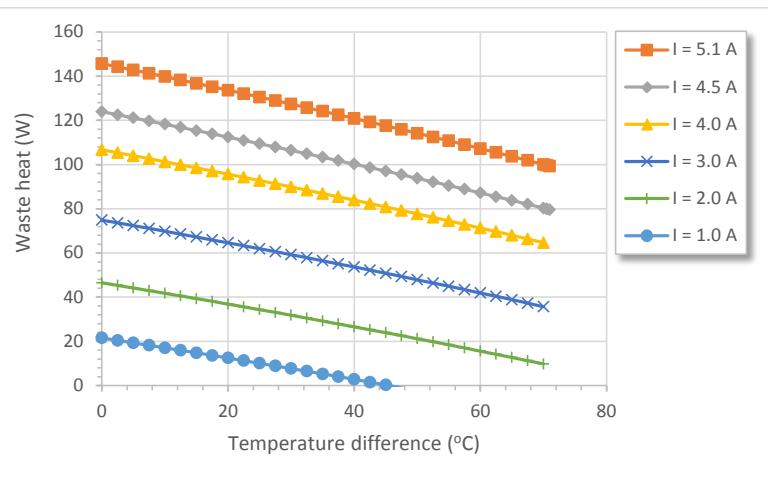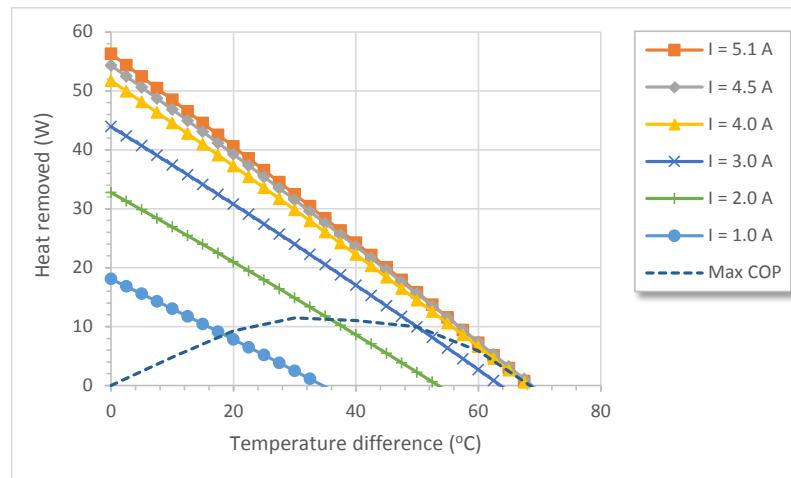

# APH-16I-12-14-E

## Peltier cooler module

### Data sheet - At hot side temperature 50°C

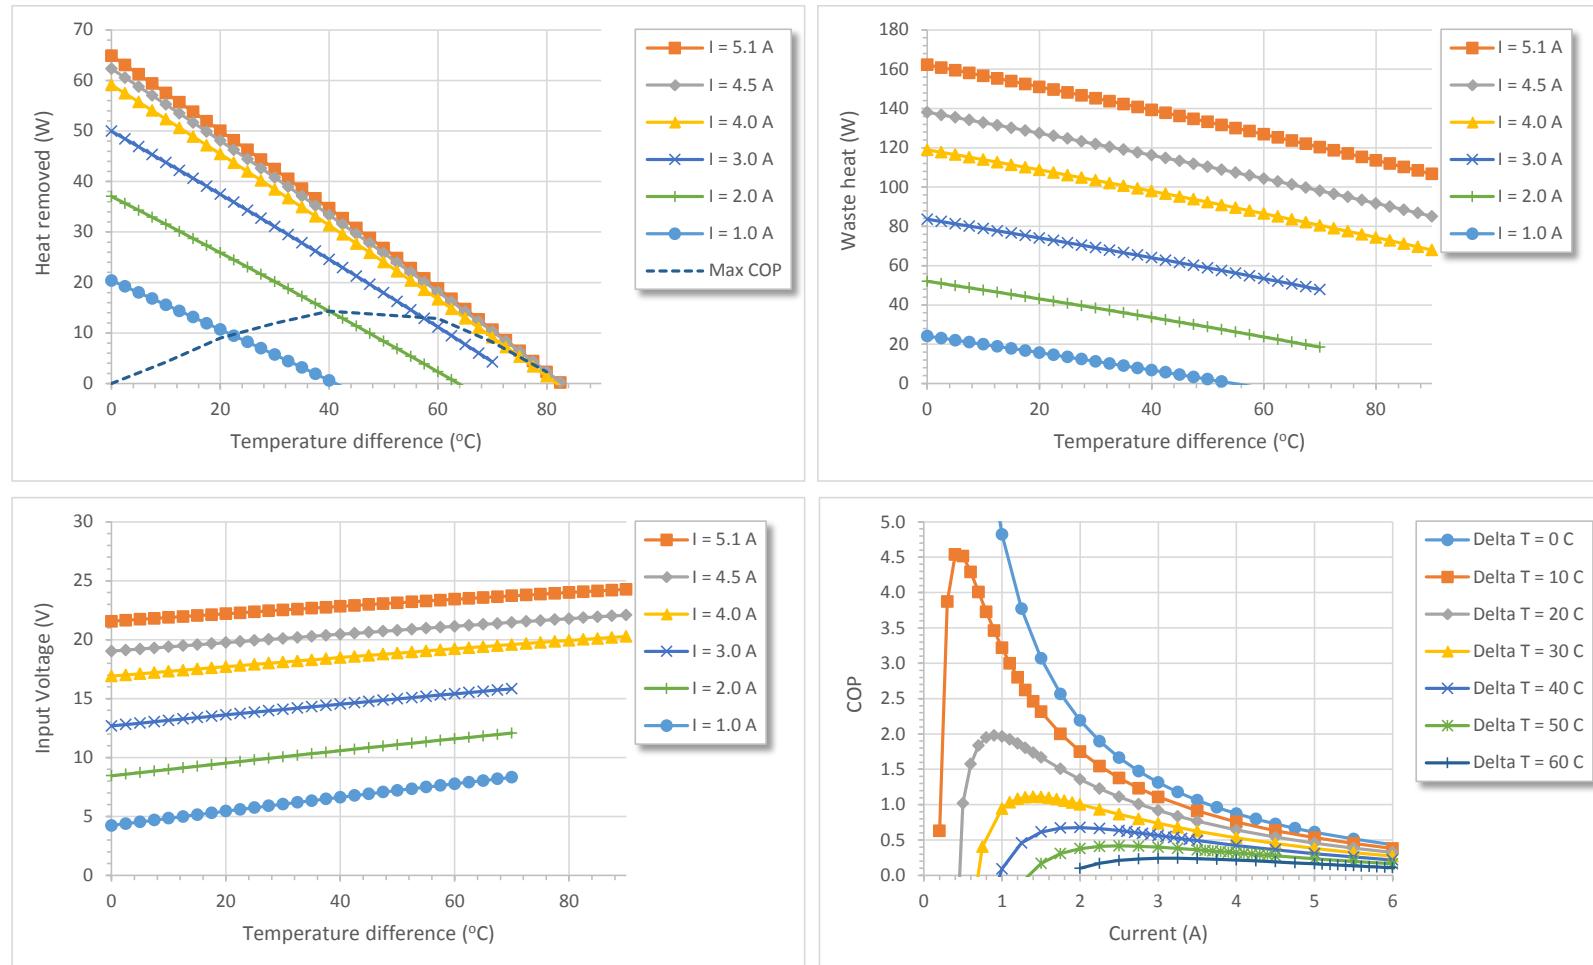

# APH-16I-12-14-E

## Peltier cooler module

### Data sheet - At hot side temperature 75°C

