



## Data sheet

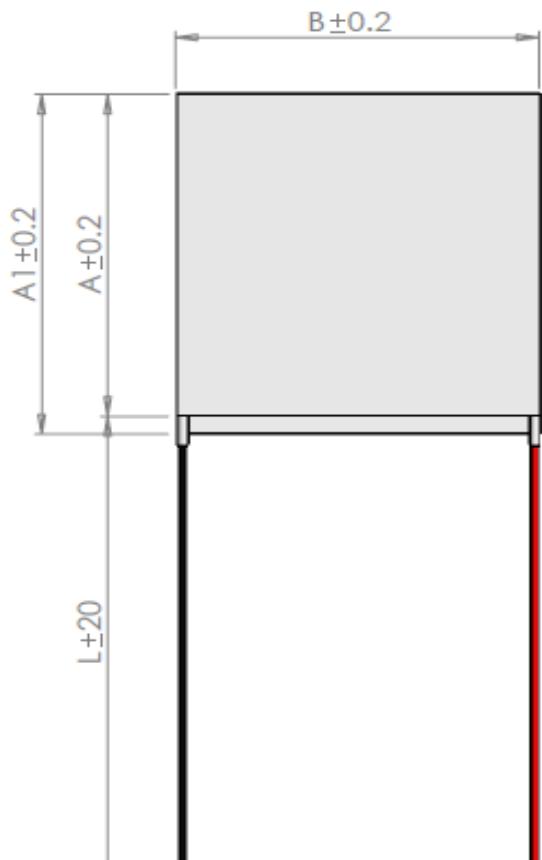

+ Input (Red)

- Input (Black)

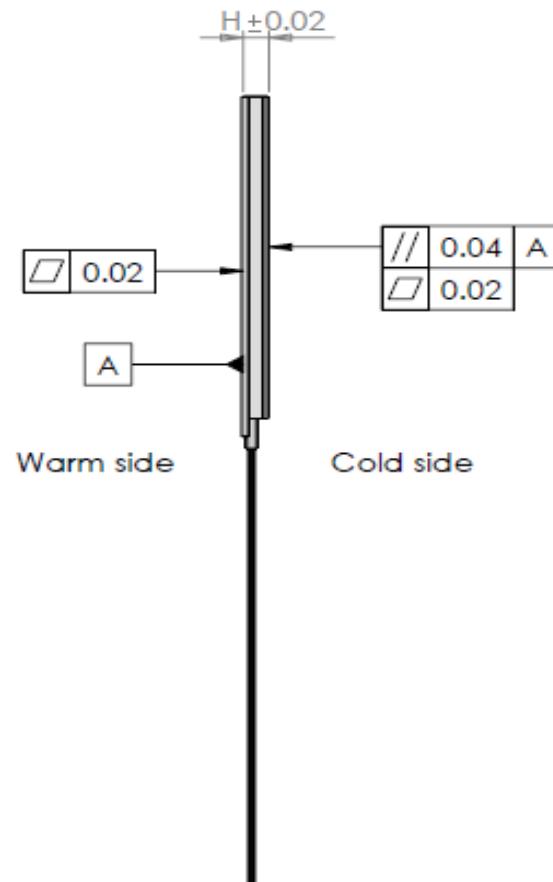

$I_{max}$	[A]	11.0
$V_{max}$	[Vdc]	24.1
$P_{c\ max}$	[W]	150
$\Delta T_{max}$	[°C]	68
$A$	[mm]	50
$A_l$	[mm]	50
$B$	[mm]	50
$H$	[mm]	3.7
$L$	[mm]	100
Wire	AWG	n/a

(At hot side temperature  $Th = 25^\circ C / 298K$ , under dry  $N_2$ ).

$P_{c\ max}$  = Cooling power at  $\Delta T = 0$  and  $I = I_{max}$ .

$\Delta T_{max}$  = Temperature difference at  $I = I_{max}$  and  $P_c = 0$ .

Max hot side temperature  $Th = 80^\circ C$  for best long term performance.

Max mounting pressure: 1.5MPa.


Wires: UL-style 1569, 105oC (Unstripped).



# APH-199-13-10-E

## Peltier cooler module


### Data sheet - At hot side temperature 25°C

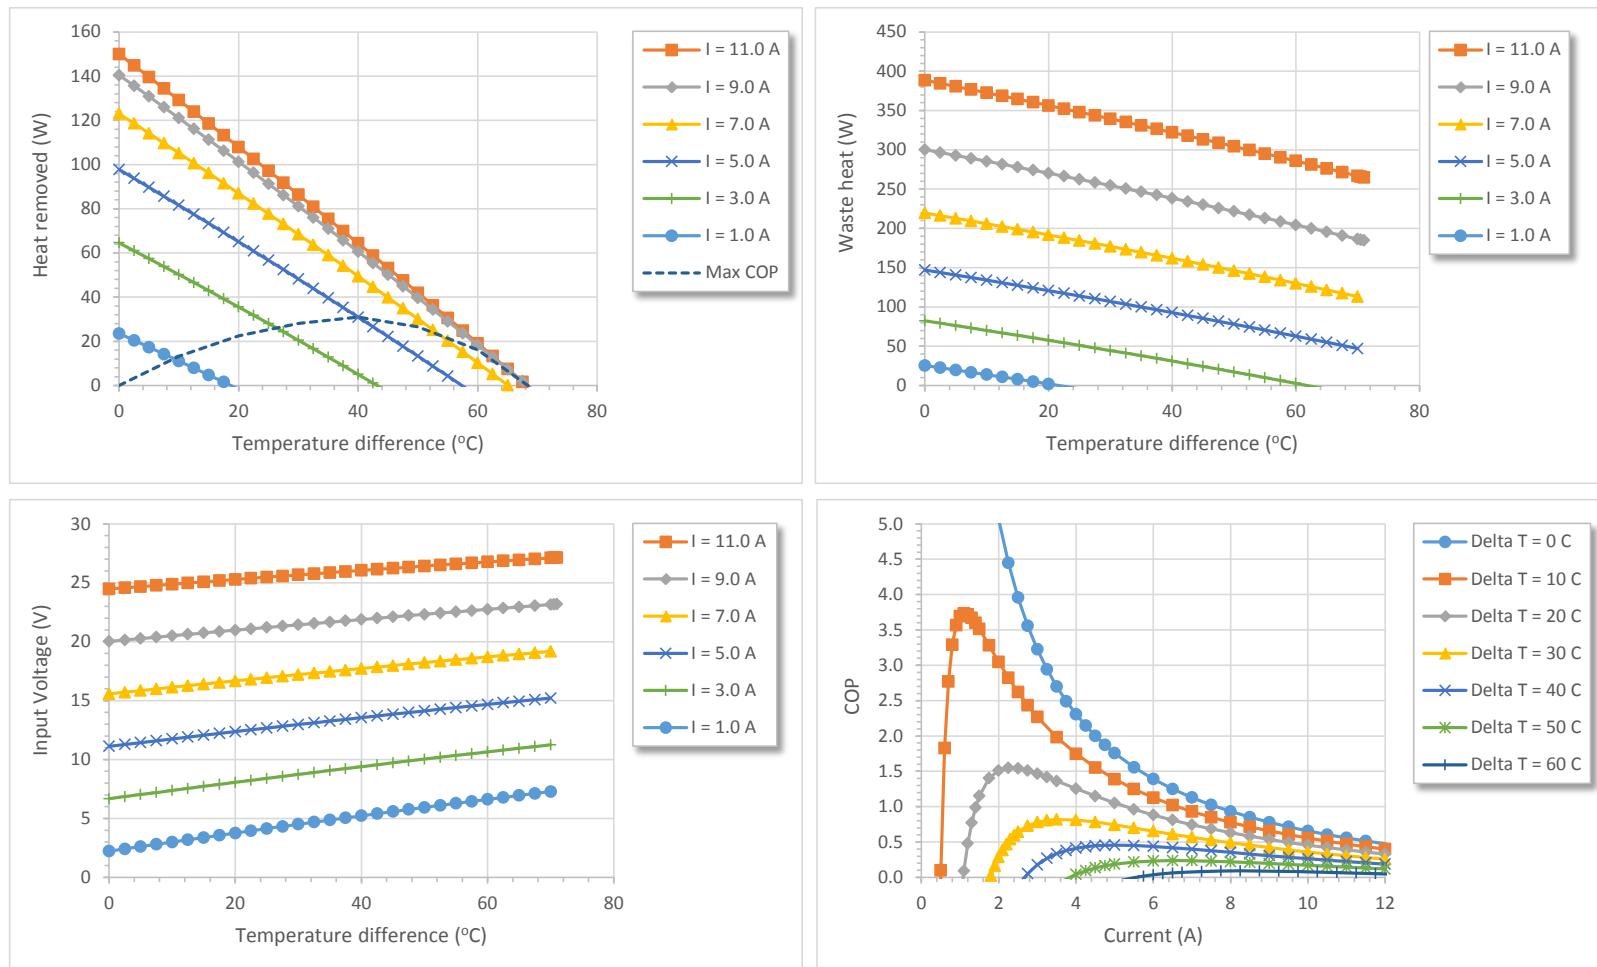

# APH-199-13-10-E

## Peltier cooler module

### Data sheet - At hot side temperature 50°C

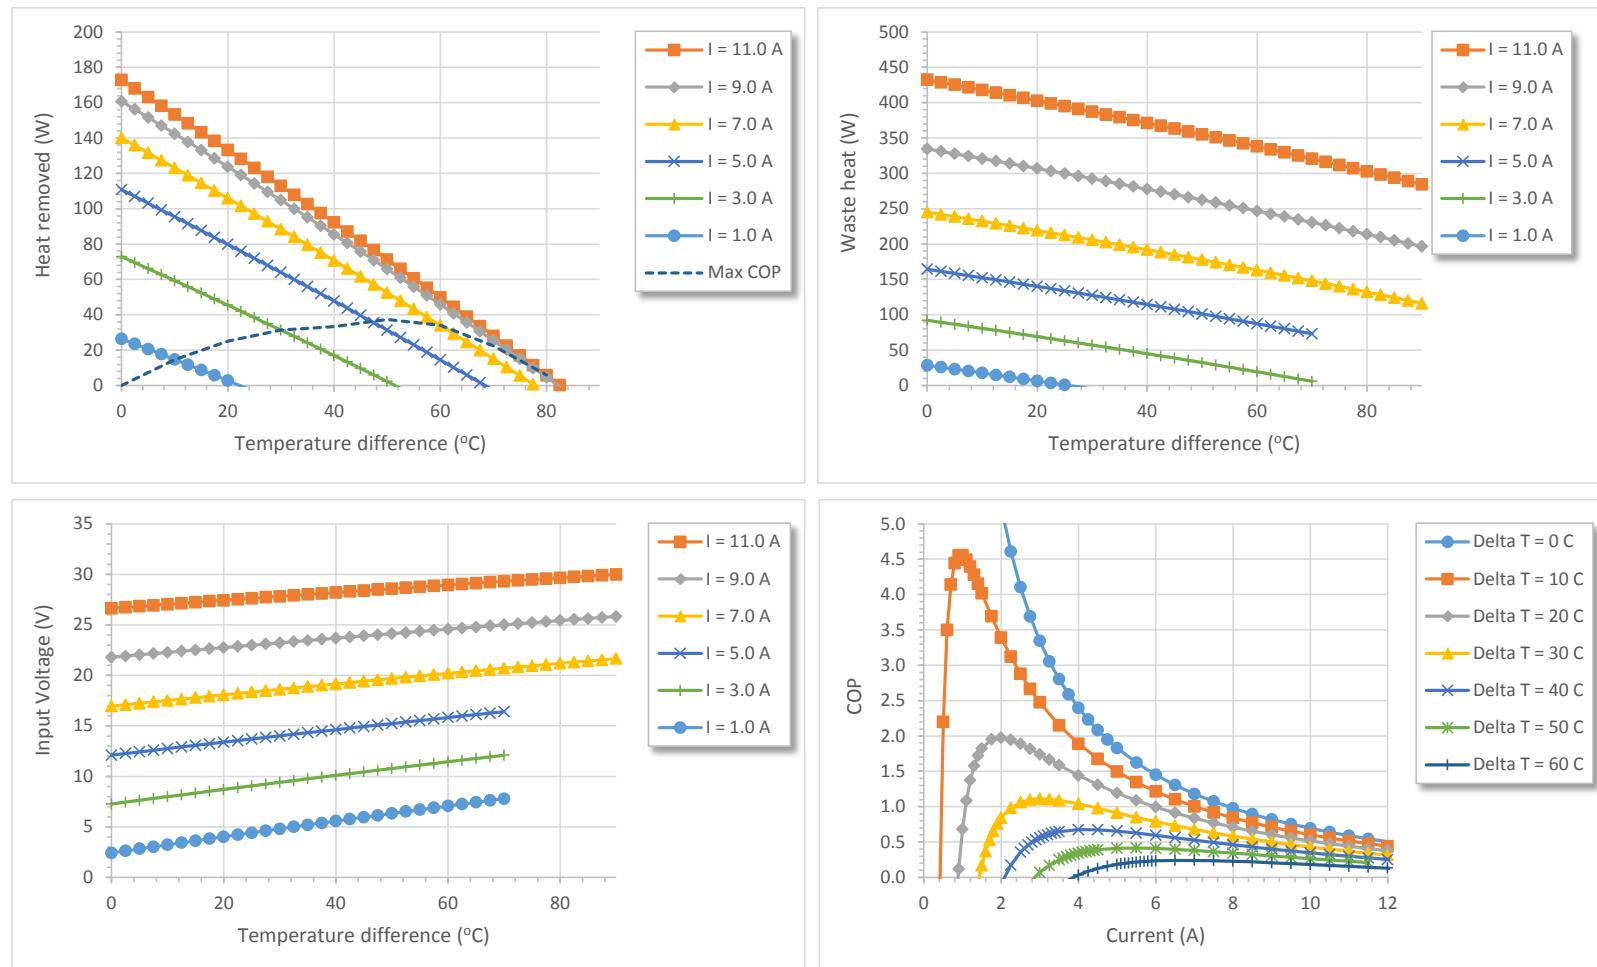

# APH-199-13-10-E

## Peltier cooler module

### Data sheet - At hot side temperature 75°C

