

EPITOMETM STAND ALONE SPEAKERS



Fig. 1

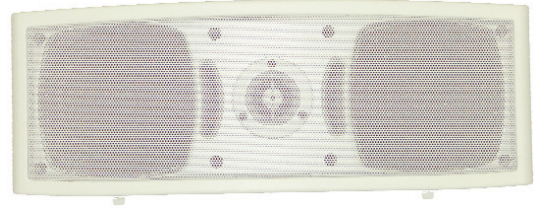


Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7

Stand Alone Speakers

Retail Part No.	Fig. No.	Description	Watts Max/RMS	Frequency Response	Tweeter	Impedance	Dimensions/Wt.				Color	Quantity
							H	W	D	lbs.		
30-3532	1	Center Channel Speaker	100/50	150Hz-20kHz	1" SILK	8 Ohms	5 3/4"	14 1/2"	5 1/4"	N/A	Black	1 Each
30-3533	2	Center Channel Speaker	100/50	150Hz-20kHz	1" SILK	8 Ohms	5 3/4"	14 1/2"	5 1/4"	N/A	White	1 Each
30-3534	3	Center Channel Speaker	100/50	150Hz-20kHz	1" SILK	8 Ohms	5 3/4"	14 1/2"	5 1/4"	N/A	Silver	1 Each
30-3581	4	Bi-directional Speakers	120/(N/A)	250Hz-20 kHz	(2) 3" FR	4 Ohms	7 1/2"	3 3/4"	4 1/8"	N/A	Black	1Pair
30-3511	5	Indoor/Outdoor Speakers	80/(N/A)	50 HZ-20 kHz	1/2" H	8 Ohms	8 1/2"	5 5/8"	4 3/4"	N/A	White	1Pair
30-3561	6	Shielded Indoor/Outdoor	80/(N/A)	120 Hz-18 kHz	3/4" PD	8 Ohms	7 1/4"	4 1/2"	4 1/2"	N/A	White	1Pair
30-3562	6	Shielded Indoor/Outdoor	80/(N/A)	120 Hz-18 kHz	3/4" PD	8 Ohms	7 1/4"	4 1/2"	4 1/2"	N/A	Black	1Pair
30-3583	7	Bi-directional Speakers	100/50	250Hz-20 kHz	(2) 2 1/2"FR	4 Ohms	7"	3 7/16"	4 3/4"	N/A	White	1Pair

Notes: Abbreviations: M-Mylar; H-Horn; PD-Piezo Dome; SD-Soft Dome; FR-Full Range