

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [34773-0140](#)
Status: **Active**
Overview: [Stac64™ Single, Multi-Pocket and Hybrid Header System](#)
Description: [Stac64™ Hybrid Receptacle Connector, 14 Circuits, Right-Angle, Polarization A, Black; Tray](#)

Documents:

[3D Model](#) [Product Specification PS-34969-100 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	PCB Headers
Series	34773
Application	Power, Wire-to-Board
Comments	Current is dependent on connector size, ambient temperature, blade size and related factors. 2.80mm – 30.0A; 0.64mm - 6.0A. Polarization A
Overview	Stac64™ Single, Multi-Pocket and Hybrid Header System
Product Name	Stac64™
UPC	884982910522

Physical

Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Circuits Detail	16 x 0.64 and 4 x 2.8
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	10.313/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm, 5.25mm
Pitch - Termination Interface	2.54mm, 5.25mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	N/A

Electrical

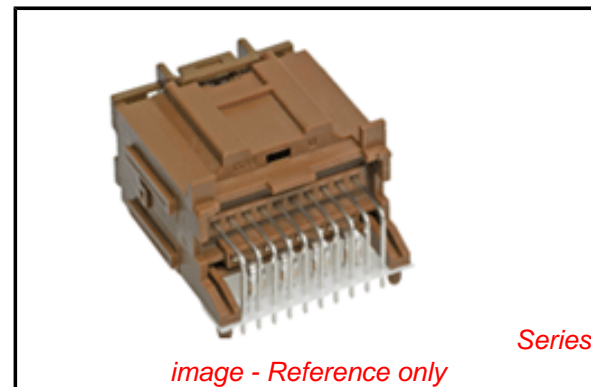


image - Reference only

EU RoHS

ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[34773Series](#)

Mates With

[34969 Stac64™ Hybrid Receptacle Connector](#)

Use With

[CTX64 Female Terminal 34803](#)

Current - Maximum per Contact
Voltage - Maximum

30.0A, 6.0A
500V

Material Info

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-34969-100
SD-34708-200, SD-34708-300, SD-34708-400,
SD-34773-010

This document was generated on 04/24/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION