


Medical Open Frame

65 Watts PBM65 Series

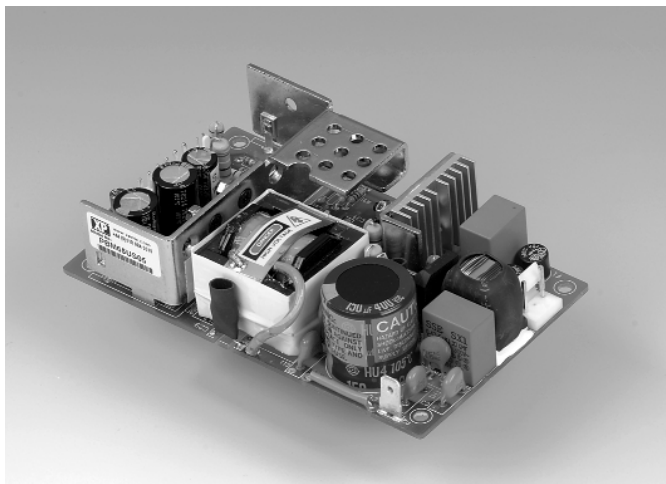

THE XPERTS IN POWER

- 4000 VAC Isolation
- Low Leakage Current
- Meets Class B, EN55011 Conducted
- Medical Safety Agency Approvals
- Both Line and Neutral Fused
- Fixed Switching Frequency

Specification

Input

- *Input Voltage* 85-264 VAC
- *Input Frequency* 47-63 Hz
- *Input Current* 1.6 A max at 115 VAC
1.0 A max at 230 VAC
- *Inrush Current* 17A at 115 VAC
40A at 230 VAC
- *Earth Leakage Current* 90 μ A max at 115 VAC, 60 Hz
150 μ A max at 230 VAC, 50 Hz

Output

- *Output Voltage* 5.1 to 28 VDC
- *Output Voltage Adjustment* $\pm 5\%$
- *Output Power* 65 Watts
- *Minimum Load* No minimum load required
- *Line Regulation* $\pm 0.5\%$ max at full load
- *Load Regulation* $\pm 2\%$ typical
- *Ripple and Noise* $\pm 1\%$ pk-pk max (See Note 2)
- *Transient Response* 4% maximum deviation, 500 μ s recovery time to within 1% for a 25% load change
- *Temperature Coefficient* $\pm 0.04\%/^{\circ}\text{C}$
- *Overvoltage Protection* 112-132% with auto recovery
- *Overcurrent Protection* Protected to short circuit conditions auto-restart
- *Remote Sense* Provided on separate connector

General

- *Efficiency* 75% min for $V_o \geq 12\text{V}$,
66% min for others
- *MTBF* 400,000 hrs min MIL-HDBK-217F
- *Switching Frequency* 42 kHz ± 5 kHz
- *Isolation Voltage* 4000 VAC Input to Output
1500 VAC Input to Output
500 VAC Output to Ground
- *Size* 3.0" x 5.0" x 1.2"
- *Weight* 330 g approx

Environmental

- *Operating Temperature* 0 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
Derate linearly from 100% load at +50 $^{\circ}\text{C}$ to 50% load at +70 $^{\circ}\text{C}$
- *Cooling* Convection cooled
- *Relative Humidity* 5-95% non-condensing
- *Storage Temperature* -40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$

EMC & Safety


- *Safety Approvals* UL2601-1, CSA C22.2 No 601.1, EN60601-1
- *EMI/EMC* EN55011 (CISPR11) Class B and FCC Part 18 Level B conducted

OUTPUT VOLTAGE & CURRENT RATINGS				PBM65
Maximum Output Power	Output Voltage	Output Current	Total Regulation ⁽¹⁾	Model Number
51 W	5.1 VDC	10.0 A	3%	PBM65US05
65 W	12.0 VDC	5.5 A	2%	PBM65US12
65 W	15.0 VDC	4.4 A	2%	PBM65US15
65 W	18.0 VDC	3.7 A	2%	PBM65US18
65 W	24.0 VDC	2.8 A	2%	PBM65US24
65 W	28.0 VDC	2.4 A	2%	PBM65US48

Notes

1. Total regulation includes line and load regulation and set point accuracy.
2. Ripple and noise measured with 20 MHz bandwidth with 10 μ F electrolytic in parallel with a 1.0 μ F ceramic.

Mechanical Details

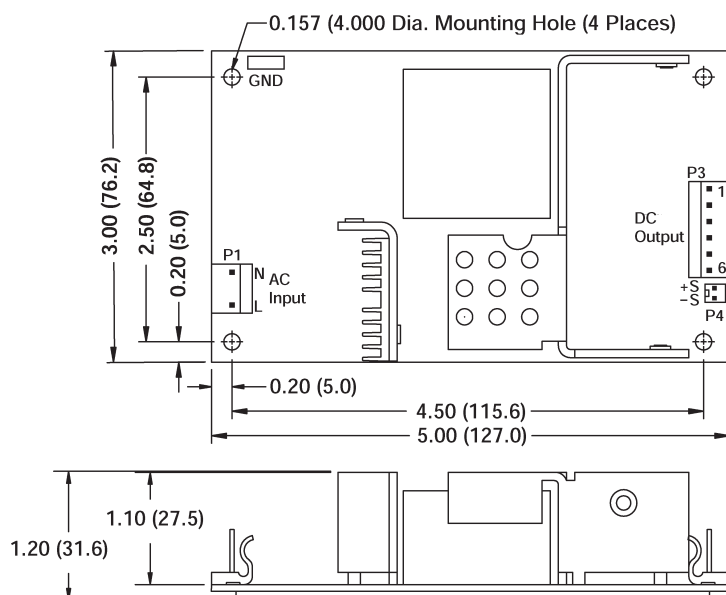

P3 PIN CONNECTIONS	
Pin	Function
1	Output 1
2	Output 1
3	Output 1
4	Return
5	Return
6	Return

NOTES:

1. Dimensions shown in inches (mm).
2. Tolerance 0.02 (0.5) maximum.
3. Input connector mates with molex housing 09-50-3031 and Molex 2878 series crimp terminal.
4. Output connector mates with molex housing 09-50-3061 and Molex 2878 series crimp terminal.
5. P4 is for sense connector mates with molex housing 22-01-1023 and molex 40445 series crimp terminal.
6. Loom kits with 300 mm wire available, order part number PBM65 LOOM.
7. For mating connectors only, order part number PBM65 CONKNT.
8. Covers available, order part number PBM65 COVER.
9. Weight: 330 g (PCB format).