


HOLE PATTERN:



Coil former material: Valox 420SE0 (PBT), glass-reinforced.
 UL file number: E45329(R) - UL94V-0.
 Pin material: Copper-plated steel wire, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 177 mm².
 Mean length of turn: 69 mm.

CLASSNO.	CPH-ETD39-1S-16P-C		4322 021 01651	96-02-06
98-01-20				98-04-20
				2004-09-28
				2008-06-19
NAME NAAM	M. Trynçiel	SUPERV. VERV.	001	112 - 001
MPA	TCHES CONTE.	DAT.	96-02-06	069
			PROPERTY OF Eigendom van	© FERROXCUBE 2008

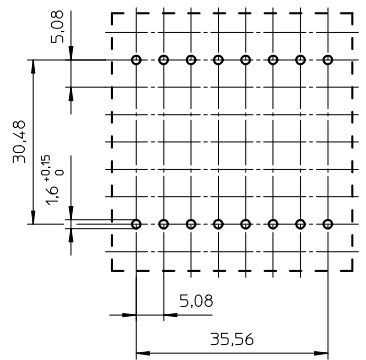