


# 3M™ Pin Strip Header

.100", .235"/.318" Mating Length, Straight & Right Angle, Solder Tails

929 Series

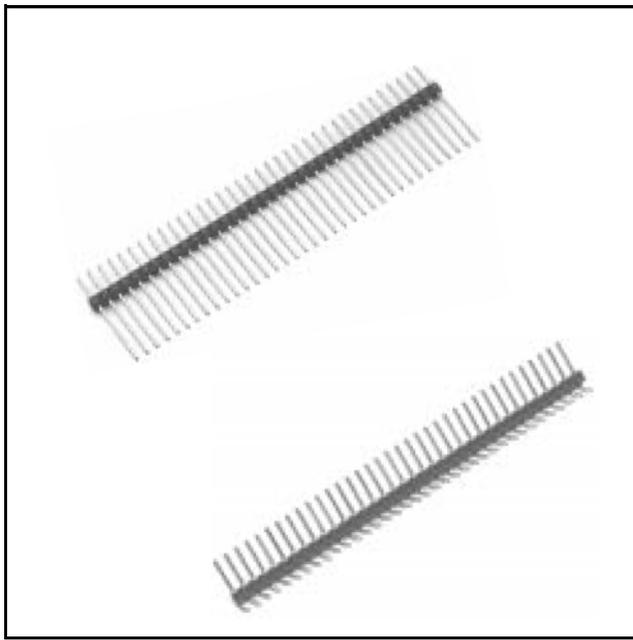

- Stackable
- Tin Lead or gold plating available
- Solder stand-offs facilitate production wave soldering
- Board pin retention feature available
- RoHS compliant\* versions (EU and RK plating suffixes) available

Date Modified: August 22, 2006

TS-0769-05  
Sheet 1 of 5

---

## Physical

### Insulation

Material: Glass Filled Polyester (PBT) or PCT (RoHS compliant)

Flammability: UL 94V-0

Color: Black

### Contact

Material: Copper Alloy

### Plating

Underplating: 50 μ" [1.27μm] Nickel

Wiping Area & Solder Tails: See ordering information

Note: The location and thickness of the contact plating is determined by the part number. Refer to ordering information.

---

## Electrical

**Current Rating:** 2.5 A

**Insulation Resistance:**  $> 5 \times 10^9 \Omega$  at 500 VDC

**Withstanding Voltage:** 1500 Vrms at Sea Level

---

## Environmental

**Temperature Rating:** -40°C to +105°C

**Process Rating:** 260°C (per J-STD-020C) for PCT parts only  
PBT parts are not intended for reflow processing

\*RoHS = Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment  
"RoHS compliant" means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M's knowledge and belief based upon information provided by third party suppliers to 3M.




UL File No.: E68080

# 3M™ Pin Strip Header

.100", .235"/.318" Mating Length, Straight & Right Angle, Solder Tails

929 Series

One Row

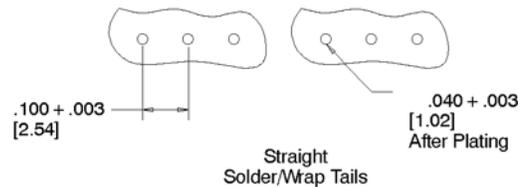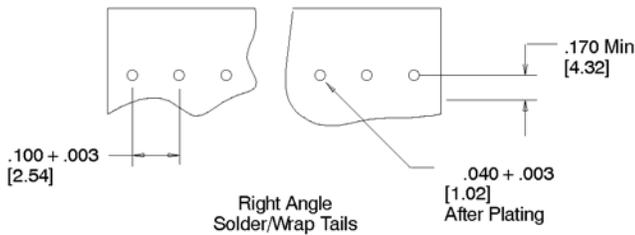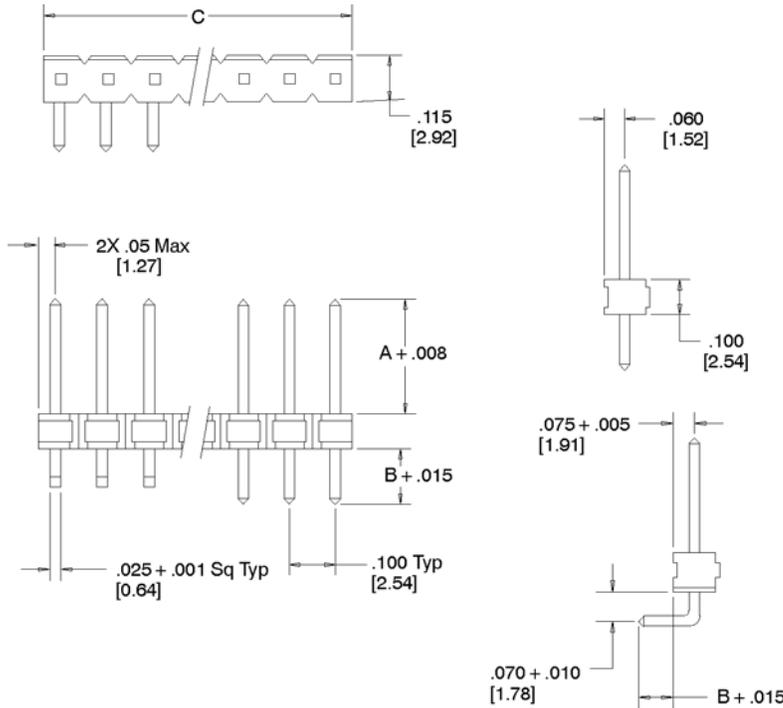

### Recommended Hole Pattern

Pin Quantity	Dimension C (see note 1)
01	0.10 [2.5]
02	0.20 [5.1]
03	0.30 [7.6]
04	0.40 [10.2]
05	0.50 [12.7]
06	0.60 [15.2]
07	0.70 [17.8]
08	0.80 [20.3]
09	0.90 [22.9]
10	1.00 [25.4]
11	1.10 [27.9]
12	1.20 [30.5]
13	1.30 [33.0]
14	1.40 [35.6]
15	1.50 [38.1]
16	1.60 [40.6]
17	1.70 [43.2]
18	1.80 [45.7]
19	1.90 [48.3]
20	2.00 [50.8]
21	2.10 [53.3]
22	2.20 [55.9]
23	2.30 [58.4]
24	2.40 [61.0]
25	2.50 [63.5]
26	2.60 [66.0]
27	2.70 [68.6]
28	2.80 [71.1]
29	2.90 [73.7]
30	3.00 [76.2]
31	3.10 [78.7]
32	3.20 [81.3]
33	3.30 [83.8]
34	3.40 [86.4]
35	3.50 [88.9]
36	3.60 [91.4]

Inch  
[m.m]

Tolerance Unless Noted			
	.0	.00	.000
inch	±.1	±.01	±.005

[ ] Dimensions for Reference Only

### Notes:

- Dimension C is a maximum when the pin strip is cut to length, not when the strip is broken to length.
- Board pin retention feature available: change from "926" to "9R9" when ordering.

TS-0769-05  
Sheet 2 of 5

# 3M™ Pin Strip Header



.100", .235"/.318" Mating Length, Straight & Right Angle, Solder Tails

929 Series

**One Row**

Table 1					
Plating	3M Part Number	Tail Length Code	Dimensions		
			A	B	
Gold	929647 Straight	01	.235 [ 5.97]	.110 [ 2.79]	
		09		.145 [ 3.68]	
		02		.210 [ 5.33]	
		03		.410 [10.41]	
		04		.510 [12.95]	
		05		.610 [15.49]	
		07		.910 [23.11]	
	929648 Right Angle	01	.235 [ 6.97 ]	.110 [ 2.79 ]	
	929705 Straight	01	.318 [ 8.08]	.110 [ 2.79]	
		11		.125 [ 3.18]	
		09		.145 [ 3.68]	
		06		.710 [18.03]	
	Tin	929834 Straight	01	.235 [ 5.97]	.110 [ 2.79]
			02		.210 [ 5.33]
03			.410 [10.41]		
04			.510 [12.95]		
05			.610 [15.49]		
07			.910 [23.11]		
929835 Right Angle		01	.235 [ 5.97 ]	.110 [ 2.79 ]	
929700 Straight		01	.318 [ 8.08]	.110 [ 2.79]	
		11		.125 [ 3.18]	
		06		.710 [18.03]	
929730 Right Angle		01	.318 [ 8.08 ]	.110 [ 2.79 ]	

## Ordering Information

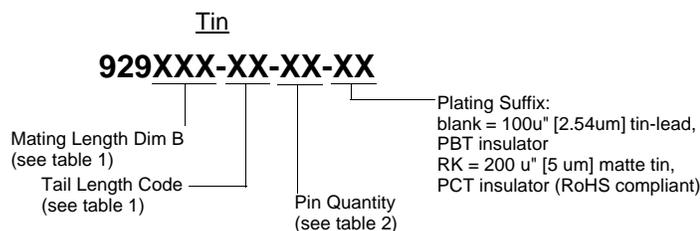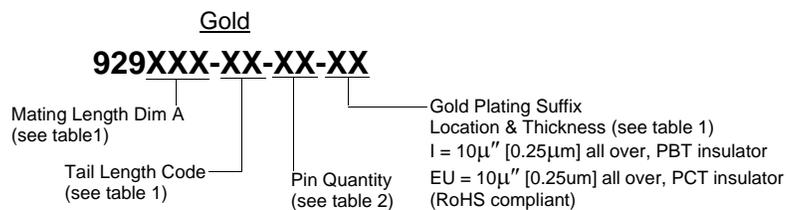


TS-0769-05  
Sheet 3 of 5

# 3M™ Pin Strip Header

.100", .235"/.318" Mating Length, Straight & Right Angle, Solder Tails

929 Series

## Two Row

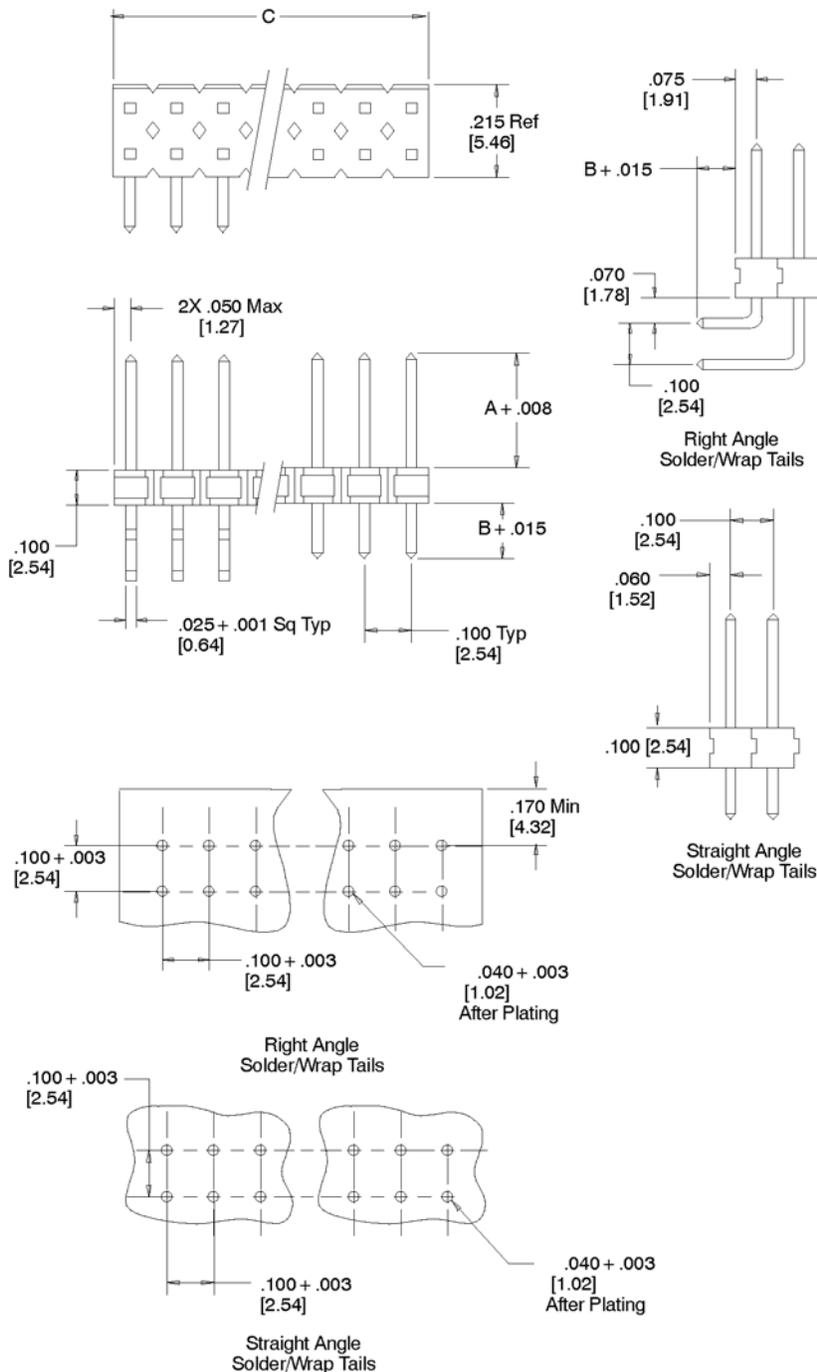

### Recommended Hole Pattern

Pin Quantity	Total Pin Quantity	Dimension C (see note 1)
01	02	0.10 [ 2.5 ]
02	04	0.20 [ 5.1 ]
03	06	0.30 [ 7.6 ]
04	08	0.40 [10.2]
05	10	0.50 [12.7]
06	12	0.60 [15.2]
07	14	0.70 [17.8]
08	16	0.80 [20.3]
09	18	0.90 [22.9]
10	20	1.00 [25.4]
11	22	1.10 [27.9]
12	24	1.20 [30.5]
13	26	1.30 [33.0]
14	28	1.40 [35.6]
15	30	1.50 [38.1]
16	32	1.60 [40.6]
17	34	1.70 [43.2]
18	36	1.80 [45.7]
19	38	1.90 [48.3]
20	40	2.00 [50.8]
21	42	2.10 [53.3]
22	44	2.20 [55.9]
23	46	2.30 [58.4]
24	48	2.40 [61.0]
25	50	2.50 [63.5]
26	52	2.60 [66.0]
27	54	2.70 [68.6]
28	56	2.80 [71.1]
29	58	2.90 [73.7]
30	60	3.00 [76.2]
31	62	3.10 [78.7]
32	64	3.20 [81.3]
33	66	3.30 [83.8]
34	68	3.40 [86.4]
35	70	3.50 [88.9]
36	72	3.60 [91.4]

Inch  
[mm]

Tolerance Unless Noted			
	.0	.00	.000
inch	±.1	±.01	±.005

[ ] Dimensions for Reference Only

### Notes:

- Dimension C is a maximum when the pin strip is cut to length, not when the strip is broken to length. Breaking of dual row parts is not recommended.
- Board pin retention feature available: change from "926" to "9R9" when ordering.

TS-0769-05  
Sheet 4 of 5

# 3M™ Pin Strip Header



.100", .235"/.318" Mating Length, Straight & Right Angle, Solder Tails

929 Series

## Two Row

Table 2					
Plating	3M Part Number	Tail Length Code	Dimensions		
			A	B	
Gold	929665 Straight	01	0.235 [ 5.97]	0.110 [ 2.79]	
		09		0.145 [ 3.68]	
		02		0.210 [ 5.33]	
		08		0.310 [ 7.87]	
		03		0.410 [10.41]	
		04		0.510 [12.95]	
		05		0.610 [15.49]	
	929715 Straight	01	0.318 [ 8.08]	0.110 [ 2.79]	
		11		0.125 [ 3.18]	
		10		0.175 [ 4.45]	
		03		0.410 [10.41]	
		06		0.710 [18.03]	
	929667 Right Angle	01	0.235 [5.97]	0.110 [ 2.79]	
		04		0.145 [ 3.68]	
		02		0.405 [10.29]	
	929745 Right Angle	01	0.318 [8.08]	0.100 [ 2.79]	
		02		0.405 [10.29]	
	Tin	929836 Straight	01	0.235 [ 5.97]	0.110 [ 2.79]
			09		0.145 [ 3.68]
			02		0.210 [ 5.33]
			08		0.310 [ 7.87]
03			0.410 [10.41]		
04			0.510 [12.95]		
05			0.610 [15.49]		
929710 Straight		01	0.318 [ 8.08]	0.110 [ 2.79]	
		11		0.125 [ 3.18]	
		09		0.145 [ 3.68]	
		10		0.175 [ 4.45]	
		03		0.410 [10.41]	
929838 Right Angle		01	0.235 [ 5.97]	0.110 [ 2.79]	
		04		0.145 [ 3.68]	
			02		0.405 [10.29]

## Ordering Information

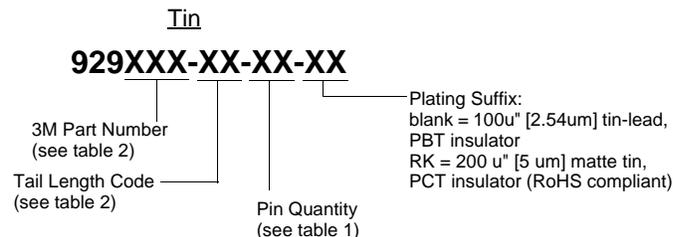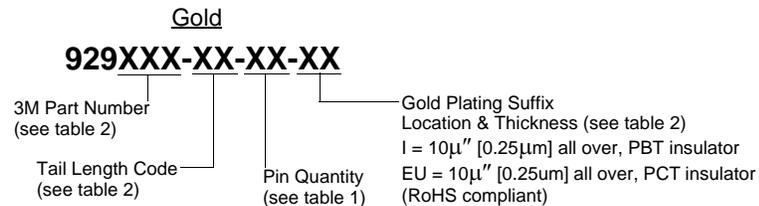

TS-0769-05  
Sheet 5 of 5

## Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.



### 3M Electronics

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/225-5373  
[www.3M.com/electronics](http://www.3M.com/electronics)

## Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 90 days from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Minimum 10%  
Post-Consumer Fiber

Printed in USA.

© 3M 2006