

MCBSTM32C

[Specifications](#)


[Knowledgebase Articles](#)

[User's Guide](#)

[Quick start Guide](#)

[Base Board Schematics](#)

[Display Board Schematics](#)

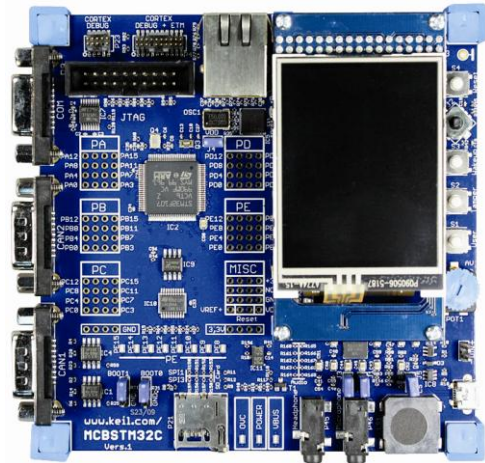

The Keil MCBSTM32C Evaluation Board enables you to create and test working programs based on the STMicroelectronics STM32 Connectivity Line family of ARM Cortex™-M3 processor-based devices.

Features

- 72MHz STM32F107VC ARM Cortex™-M3 processor-based MCU in 100-pin LQFP
- On-Chip Memory: 256KB Flash & 64KB RAM
- External Memory: 8KB I2C Flash
- Color QVGA TFT LCD with touchscreen
- 10/100 Ethernet Port
- USB 2.0 Full Speed - USB, USB-OTG, & USB Host
- 2 CAN Interfaces
- Serial/UART Port
- MicroSD Card Interface
- 5-position Joystick and push-button
- 3-axis Motion sensor / Accelerometer
- Analog Voltage Control for ADC Input
- Audio CODEC with Line-In/Out and Speaker
- 80 GPIO pins
- Debug Interface [Connectors](#)
 - 20 pin JTAG (0.1 inch connector)
 - 10 pin Cortex debug (0.05 inch connector)
 - 20-pin Cortex debug + ETM Trace (0.05 inch connector)



Evaluation Software

The MCBSTM32C Evaluation Board and Starter Kit include the [MDK-Lite](#) development tools. These tools help you get started writing programs and testing the microcontroller and its capabilities. Sample applications that run on the MCBSTM32C and a Quickstart guide are included.

Ordering Information

The MCBSTM32C is available as a stand alone evaluation board or as a [starter kit](#) which includes the ULINK-ME debug adapter.

- **MCBSTM32C:** MCBSTM32C evaluation board
- **MCBSTM32CUME:** MCBSTM32C starter kit (includes ULINK-ME)