



Eterna BLED/PIRBK

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

LED

The lamps cannot be changed in the luminaire.

874/2012

7W LED BULKHEAD


Energy efficient LED alternative to traditional bulkheads.

- This luminaire contains built-in LED lamps and the lamps cannot be changed in the luminaire
- 7W, 500 Lumens, 35,000 hours average rated life
- Tough polycarbonate construction

PIR VERSION:

- Time on adjustment 5 secs - 5 mins
- Lux level adjustments
- 120° detection angle
- 8 metre detection range

• M.O.M: 1 / O.P.Q: 10

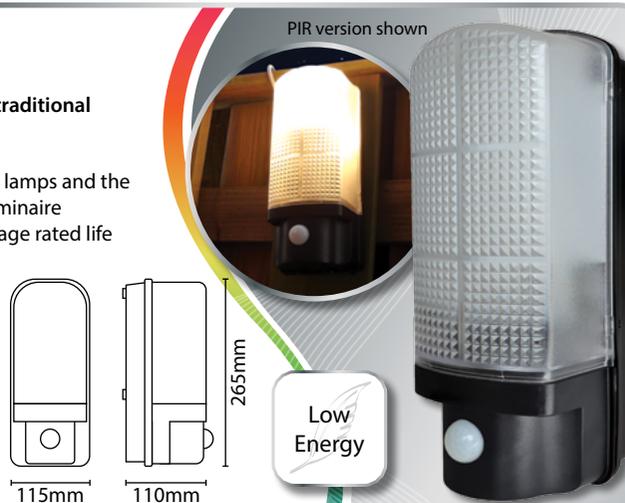

| Code | Version | Colour | Wattage | Colour Temp. | Lumens | Avg. Rated Life (Hrs) | IP Rating | Energy Rating |
|-----------|----------|--------|---------|--------------|--------|-----------------------|-----------|---------------|
| BLEDBK | Standard | Black | 7W | 3100K | 500 lm | 35,000 hrs | IP44 | A+ |
| BLEDPIRBK | 120° PIR | Black | 7W | 3100K | 500 lm | 35,000 hrs | IP44 | A+ |



| LAMP SPECIFICATIONS: | |
|--|-------------------------------|
| Lumens total flux | 500 lm |
| Lumens 120° flux | 450 lm |
| Rated Wattage | 7W |
| Rated luminous flux | 500 lm |
| Nominal life time of the lamp | 35,000 hrs |
| Colour temperature | 3100K |
| Number of switching cycles before premature lamp failure | ≥15,000 |
| Warm-up time up to 60 % of the full light output | Instant full light |
| Dimmable | No |
| LED strip dimensions (L/W) | 130x35mm |
| Nominal beam angle | 120° |
| Rated power | 7W |
| Rated lamp lifetime | 35,000 hrs |
| Lamp power factor | >0.5 |
| Lumen maintenance factor at end of nominal life | ≥0.70 |
| Starting time | <0.1s |
| Colour rendering | ≥80 |
| Colour consistency | Within 6 step Macadam ellipse |
| Rated peak intensity | 180cd |
| Rated beam angle | 120° |
| Voltage | 240V |

Not suitable for accent lighting