

# Features

# Regulated Converters

- 50mW max. No Load Power Consumption
- High Efficiency up to 79%
- Isolated Output 3.75kVAC / 1 min
- SCP, OVP Protection
- Wide Operating Temperature Range: -40°C to +80°C (only with suffix „-E“)
- Universal Input 80-305VAC



## RAC04-C/277

# 4 Watt Single and Dual Output



### Description

The RAC04-xxS\_DC/277 series are fully certified single and dual regulated AC/DC converters in an encapsulated PCB-mount package style with 3.75kVAC isolation and very low stand-by power consumption. The modules are suitable for worldwide use due to their wide input voltage range from 80VAC to 305VAC. Possible uses include home automation, standby applications and industrial controls.

### Selection Guide

Part Number	Input Voltage Range (VAC)	Output Voltage (VDC)	Output Current (mA)	Efficiency typ. (%)	Max. Capacitive Load (1+2) (µF)
RAC04-3.3SC/277 <sup>(3)</sup>	80-305	3.3	1200	72	10000
RAC04-05SC/277 <sup>(3)</sup>	80-305	5	800	75	7200
RAC04-12SC/277 <sup>(3)</sup>	80-305	12	333	78	1000
RAC04-15SC/277 <sup>(3)</sup>	80-305	15	267	79	820
RAC04-24SC/277 <sup>(3)</sup>	80-305	24	167	79	220
RAC04-0512DC/277 <sup>(3)</sup>	80-305	5/12	720/33	75	4700/100
RAC04-05DC/277 <sup>(3)</sup>	80-305	±5	±400	76	±3300
RAC04-12DC/277 <sup>(3)</sup>	80-305	±12	±166	78	±680


#### Notes:

Note1: Measured @ 230VAC/50Hz/Ta 25°C with constant resistant mode at full load.

Note2: If used @115VAC/60Hz with full load, max. capacitive load is less, please contact RECOM for detailed information.



### Model Numbering

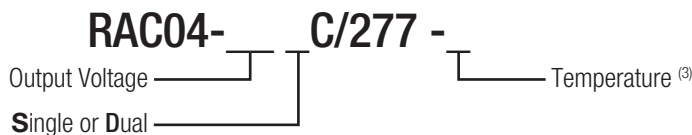

#### Notes:

Note3: with suffix “-E” for -40°C to +80°C operating temperature range without suffix standard operating temperature range (-25°C to +80°C)

#### Examples:

- e.g. RAC04-3.3SC/277-E, Single Output, with -40° to +80°C operating temperature range
- e.g. RAC04-05DC/277, Dual Output with standard operating temperature range

### Specifications (measured at TA= 25°C, nominal input voltage, full load and after warm-up)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range		80VAC 113VDC	277VAC 390VDC	305VAC 430VDC
Input Current	full load, 115VAC full load, 230VAC			98mA 64mA
Inrush Current	cold start at 25°C, 115VAC cold start at 25°C, 230VAC			15A 30A
No load Power Consumption	80-305VAC, 50/60Hz			50mW
Input Frequency Range	AC Input	47Hz		440Hz
Hold-up time	115VAC	15ms		

continued on next page

- IEC-60950-1 Certified\*
- EN-50155 Certified\*
- EN-55024 Certified\*
- EN-60950-1 Certified\*
- UL-60950-1 Certified\*

\* with suffix “-E” Pending

### Refer to Applications Notes

Specifications (measured at  $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### BASIC CHARACTERISTICS


Parameter	Condition	Min.	Typ.	Max.
Operating Frequency	full load		67kHz	
Efficiency				see Selection Guide
Minimum Load	RAC04-0512DC/277(-E) All Others		$\pm 5\%$ / $\pm 0\%$ 0%	
Output Ripple and Noise <sup>(4)</sup>			200mVp-p	

#### Notes:


Note4: Ripple and Noise is measured at 20MHz bandwidth and with a 47 $\mu\text{F}$  low-ESR electrolytic capacitor in parallel with a 0.1 $\mu\text{F}$  ceramic capacitor across output.

### Efficiency vs. Load


RAC04-3.3SC/277 (-E)

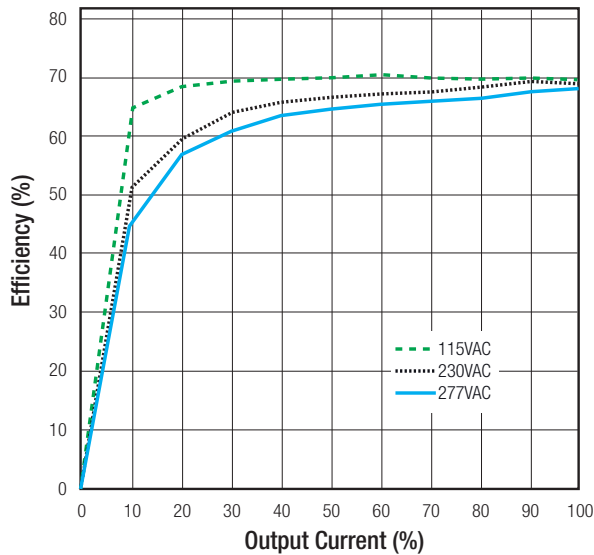


RAC04-05SC/277 (-E)

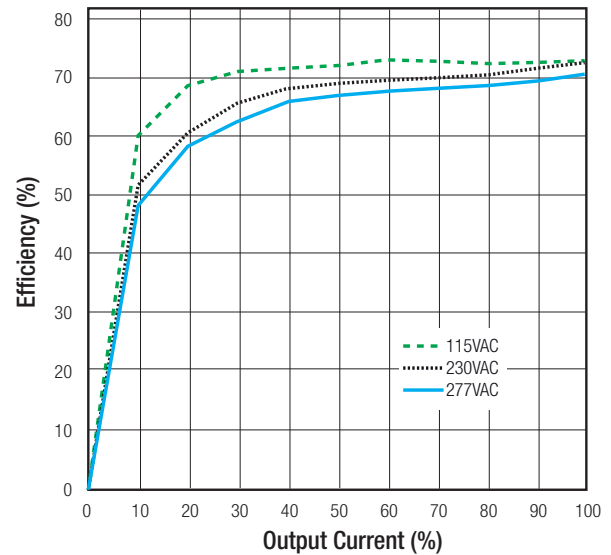

RAC04-12SC/277 (-E)

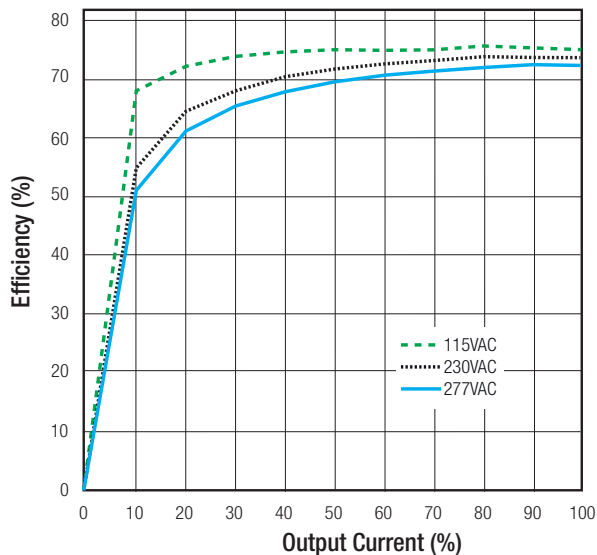





RAC04-15SC/277 (-E)

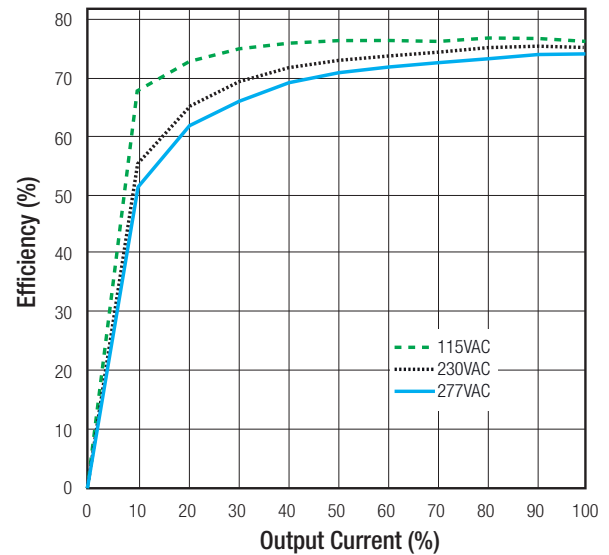

continued on next page

Specifications (measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load and after warm-up)

### Efficiency vs. Load

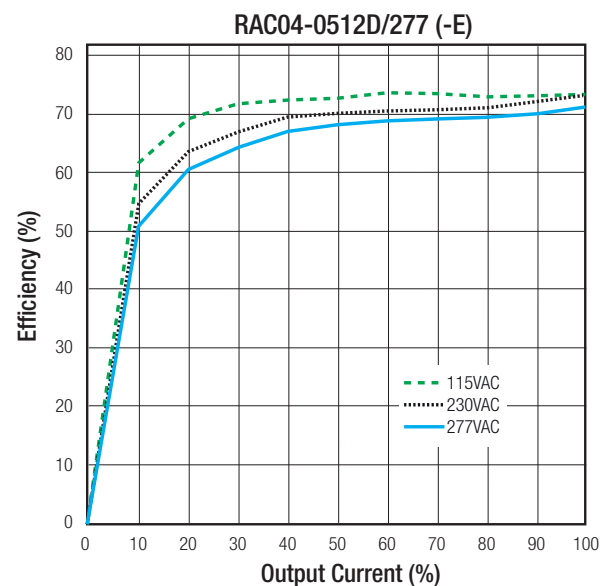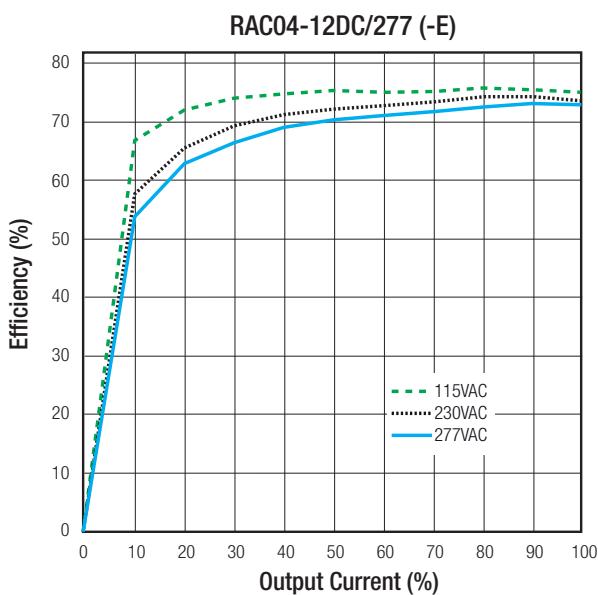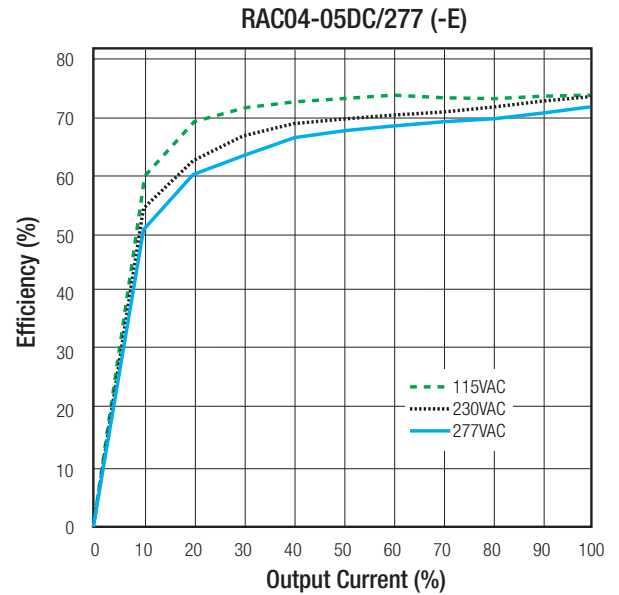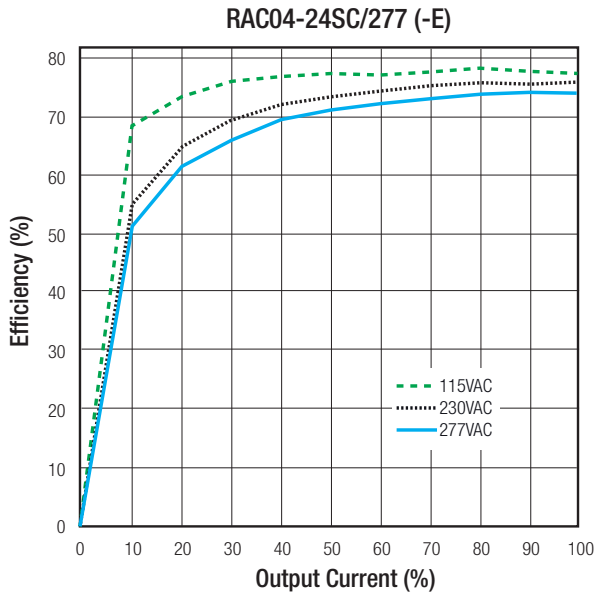


### REGULATIONS

Parameter	Condition	Value
Output Voltage Tolerance	RAC04-0512DC/277(-E) All Others	$\pm 2\%$ / $\pm 10\%$ typ. $\pm 2\%$ typ.
Line Voltage Regulation	90-305VAC, RAC04-0512DC/277(-E) 90-305VAC, All Others	$\pm 0.2\%$ / $\pm 1\%$ typ. $\pm 0.2\%$ typ.
Load Voltage Regulation (5V minimum load 5% @12V full load)	3.3V, 5V RAC04-0512DC/277(-E) All Others	$\pm 1\%$ typ. $\pm 1\%$ / $\pm 5\%$ typ. $\pm 0.5\%$ typ.

Specifications (measured at  $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

PROTECTIONS		
Parameter	Type	Value
Short Circuit Protection (SCP)		automatic recovery
Isolation Voltage	I/P to O/P	3.75kVAC / 1 Minute
Isolation Resistance		100M $\Omega$ min.
Leakage Current	277VAC / 50Hz	0.25mA max.

### Application Note

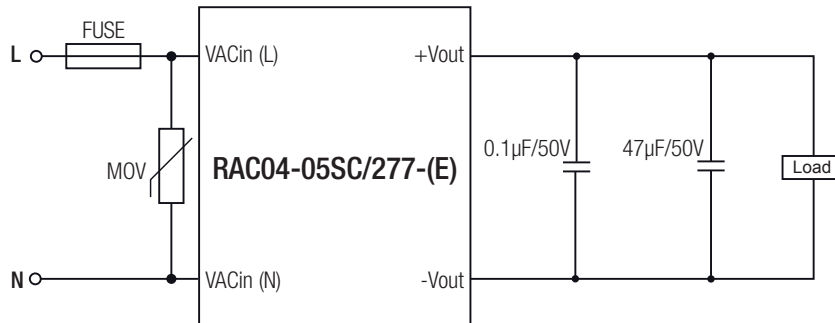

**Notes:**

Note3: An external input fuse is recommended: T1A slow blow type



Note4: To measure the output ripple and noise short runs by 0.1µF/50V & 47µF/50V @20MHz, nominal input and full load.

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Temperature Range	230VAC, with derating (see graph) with suffix "-E", with derating (see graph)	-25°C to +80°C -40°C to +80°C
Maximum Case Temperature		90°C
Thermal Impedance		10°C / W
Humidity	non-condensing	95%, RH max.
MTBF <sup>(6)</sup>	MIL-HDBK-217F, +25°C	500 x 10 <sup>3</sup> hours

**Notes:**

Note5: MTBF is referring RAC04-3.3SC/277

### Derating Graph

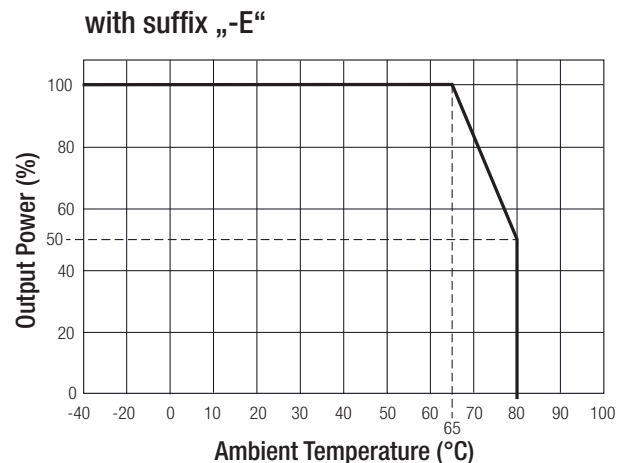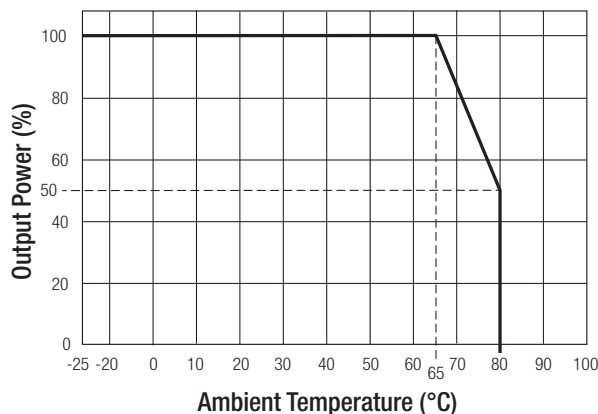

**Specifications** (measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load and after warm-up)

**SAFETY AND CERTIFICATIONS**



Certificate Type	Report / File Number	Standard
CB Report	1311055-1-M1	IEC-60950-1, 2nd Edition
EN General Safety	SPCLVD1311055-1	EN-60950-1, 2nd Edition
UL General Safety	E224736-X1-A18	UL-60950-1, 2nd Edition, 2011
Canada General Safety	E224736-X1-A18	CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2011

Certificate Type (Environmental)	Report / File Number	Standard / Criterion
ESD	Report: T121109N01-E	EN61000-4-2, Criteria B
Radiated Immunity		EN61000-4-3, Criteria A
Fast Transient		EN61000-4-4, Criteria B
Surge		EN61000-4-5, Criteria B
Conducted Immunity		EN61000-4-6, Criteria A
Voltage dips and variations		EN61000-4-8, Criteria A
Harmonic Current Emissions		EN-61000-3-2
Voltage flicker	EN-61000-3-3	
EMI Standard	Report: T121109N01-E	EN55022, Class B EN55024
Vibration		MIL-STD-202G
Over Voltage Category		OVC II

**DIMENSION and PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Case Material		UL94V-0, black plastic
Potting Material		UL94V-0, Silicone
Package Dimension (LxWxH)		36.7 x 27.2 x 17.1mm
Package Weight		41g typ.

**Dimension Drawing (mm)**

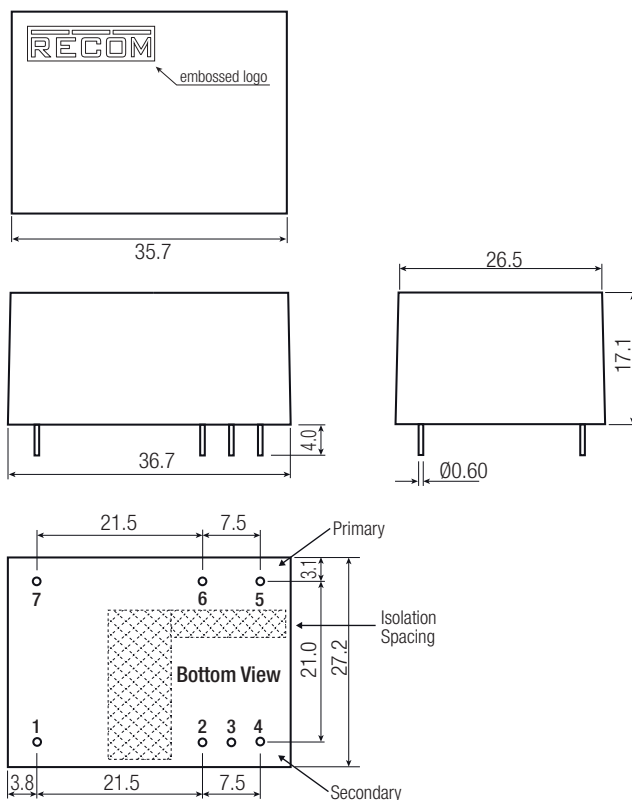

**Pin Connections**

Pin #	Single	Dual	Dual (asymmetric)
1	No Pin	No Pin	No Pin
2	+VDC out	+VDC out	+5V
3	-VDC out	Com	Com
4	NC	-VDC out	+12V
5	VAC in (L)	VAC in (L)	VAC in (L)
6	VAC in (N)	VAC in (N)	VAC in (N)
7	NC	NC	NC

NC= no connection  
 Tolerance: xx.x=  $\pm 0.5\text{mm}$   
 xx.xx=  $\pm 0.35\text{mm}$   
 Pin width:  $\pm 0.05\text{mm}$

Specifications (measured at  $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	Tube	520 x 32 x 27mm
Packaging Quantity		12 pcs.
Storage Temperature Range		-40°C to +100°C

Tube Dimension Drawing (mm)

