




MICRO SWITCH™  
Subminiature Basic Switches  
**ZM and ZM1 Series**

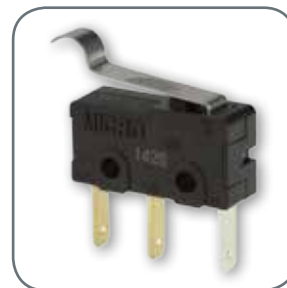

# MICRO SWITCH™ ZM and ZM1 Series Subminiature Basic Switches

MICRO SWITCH™ ZM and ZM1 Series are subminiature snap action switches from the Honeywell MICRO SWITCH™ family of Z Series subminiature basic switches. Although small in size, the ZM and ZM1 Series are rated for controlling electrical loads ranging from logic level (computer based circuits) to power duty switching (up to 16.1 A and 250 Vac).

The package size of the subminiature switch is ideal for applications where space on the equipment is at a premium. The overall length of the ZM and ZM1 Series are less than 20 mm [0.78 in]. As with all snap-action switches, the audible click when actuated promotes ease of installation and set-up of the switches. A wide variety of integral stainless steel levers are available and when combined with the subminiature package size, may adapt the switch to a wide variety of applications. The ZM Series is agency certified to UL, cUL, CE, and CQC for worldwide use, while the ZM1 Series is agency certified to UL, cUL, ENEC, and CQC for worldwide use.

## *What makes our switches better?*

- Temperature ranges from -40 °C to 125 °C [-40 °F to 257 °F] typically allows for years of reliable performance in harsh conditions
- Choice of internal switch mechanism: ZM Series with coil spring design for increased mechanical life or ZM1 Series with flat spring design for increased electrical rating
- Current carrying capacity, up to 16.1 A (ZM1 Series), typically allows for a solution in many applications where space is a premium
- Wide variety of electrical ratings, integral actuators, and electrical terminations to facilitate integration into control and/or monitoring circuits



***Subminiature size is a solution for applications where space is a premium***

RIGHT SWITCH FOR THE RIGHT APPLICATION  
RELIABILITY • ELECTRICAL RATINGS

## Features and Benefits

### SMALL PACKAGE SIZE

**Subminiature package size** (19,80 mm x 10,60 mm x 6,40 mm [0.78 in x 0.42 in x 0.25 in]) allows switch to fit in applications where other sensor or switch package size is too large.

### *Performance in a compact package*

### WELL SUITED FOR POWER-DUTY AND LOGIC-LEVEL LOADS

SPDT, SPNC, or SPNO switch options help assure the circuit requirements are met. The ZM and ZM1 Series handle power duty switching with silver alloy contacts. Gold-plated, silver alloy contacts can be provided for **logic-level control** (computer-based circuits).

### DESIGN FLEXIBILITY

Switches are built with pin plunger or various styles of stainless steel levers which **expand the versatility of the switch** in the application. The variety of terminations promotes flexibility for the electrical connectivity.

### GLOBAL APPROVALS

MICRO SWITCH™ ZM products are certified per UL, cUL to UL 1054 and CQC to GB 15092.1. MICRO SWITCH™ ZM1 products are certified per UL, cUL to UL 61058-1, ENEC to IEC 61058-1, and CQC to GB 15092.1.

## Potential Applications



### COMMERCIAL

Copy machines: Senses paper position

Cash registers: Senses drawer open or closed

Refrigerators with integral ice makers: Turns water on-and-off

HVAC: Senses back pressure in exhaust outlet

HVAC: Senses float position for water level



### MEDICAL

Hospital beds: Senses bed rail position

# ZM and ZM1 Series

## MICRO SWITCH™ ZM SERIES PRODUCT NOMENCLATURE

| ZM   | 50   | E   | 10                               | E  | 01             | —  |
|--|--|---|----------------------------------|--|----------------|--|
| Switch Type                                  | Current Rating                                     | Operating Force (at pin plunger)  | Terminal Type                    | Actuator Type (Integral Levers)                                      | Circuitry      | Special Designator <sup>2</sup>  |
| ZM Series<br>Subminiature<br>Basic<br>Switch | <b>10</b> 0.1 A 125 Vac<br>(Gold-plated contacts)  | <b>B</b> 60 g max.<br><b>D</b> 104 g max.<br><b>E</b> 146 g max.<br><b>G</b> 249 g max. | <b>10</b> Solder, straight       | <b>A</b> Pin plunger   | <b>01</b> SPDT | A special designator character(s) is used when there is a special modification to the switch. A special designator is required when Terminal Type is "99" or Actuator Type is "S". |
|  | <b>50</b> 5 A; 125 Vac/<br>250 Vac                 | <b>D</b> 104 g max.<br><b>E</b> 146 g max.<br><b>G</b> 249 g max.                       | <b>20</b> PCB, straight          | <b>B</b> Short straight lever, 16,7 mm [0.66 in] length              | <b>03</b> SPNO |  |
|  | <b>90</b> 10.1 A; 125 Vac/<br>250 Vac <sup>1</sup> | <b>G</b> 249 g max.   | <b>50</b> PCB, right angle       | <b>C</b> Standard straight lever, 18,7 mm [0.74 in] length           | <b>04</b> SPNC |  |
|  |  |   | <b>60</b> PCB, left angle        | <b>D</b> Long straight lever, 24,8 mm [0.98 in] length               |                |  |
|  |  |   | <b>70</b> Quick connect 0.110 in | <b>E</b> Std sim. roller lever, 18,0 mm [0.71 in] length R 2,75 mm   |                |  |
|  |  |   | <b>99</b> SPECIAL <sup>2</sup>   | <b>F</b> Roller lever, 16,6 mm [0.65 in] length Ø4,8 mm roller       |                |  |
|  |  |   |                                  | <b>H</b> Small sim. roller lever, 17,9 mm [0.70 in] length R 1,3 mm  |                |  |
|  |  |   |                                  | <b>J</b> Extended straight lever, 55,2 mm [2.17 in] length           |                |  |
|  |  |   |                                  | <b>K</b> Straight lever, 35,2 mm [1.39 in] length                    |                |  |
|  |  |   |                                  | <b>L</b> L-shaped lever, 31,5 mm [1.24 in] length                    |                |  |
|  |  |   |                                  | <b>M</b> Large sim. roller lever, 21,1 mm [0.83 in] length R 2,45 mm |                |  |
|  |  |   |                                  | <b>S</b> SPECIAL lever <sup>2</sup>                                  |                |  |

Not all combinations of model code are available. Please contact your Honeywell representative or distributor for assistance.

**NOTES:**

<sup>1</sup> Switches with 10.1 A rating are only available with "G" operating force.

<sup>2</sup> Terminal Type "99" or Actuator Type "S" designates a special and therefore requires a special designator character(s) at the end of the listing.

# MICRO SWITCH™ Subminiature Basic Switches

## MICRO SWITCH™ ZM1 SERIES PRODUCT NOMENCLATURE

| <b>ZM1</b>                                  | <b>50</b>                           | <b>C</b>                                 | <b>10</b>                        | <b>A</b>                             | <b>01</b>   | <b>—</b>                        |  |
|---|-------------------------------------|--|----------------------------------|--------------------------------------|---|---------------------------------|--|
| Switch Type                                 | Current Rating                      | Operating Force (at pin plunger)         | Terminal Type                    | Actuator Type                        | Circuitry   | Special Designator <sup>2</sup> |  |
| <b>ZM1 Series Subminiature Basic Switch</b> | <b>10</b><br><b>15</b> <sup>6</sup> | 0.1 A 125 Vac/<br>250 Vac <sup>3</sup>   | <b>B</b><br><b>D</b><br><b>C</b> | 70 g max.<br>95 g max.<br>150 g max. | <b>10</b>   | Solder, straight                | A special designator character(s) is used when there is a special modification to the switch. A special designator is required when Terminal Type is "99" or Actuator Type is "S".<br><b>G - Gold plated contacts</b> <sup>6</sup> |
|   | <b>50</b><br><b>55</b> <sup>6</sup> | 3 A; 125 Vac/<br>250 Vac <sup>3</sup>    | <b>B</b><br><b>D</b><br><b>C</b> | 70 g max.<br>95 g max.<br>150 g max. | <b>20</b>   | PCB, straight                   |  |
|   | <b>60</b>                           | 6 A; 125 Vac/<br>250 Vac <sup>3</sup>    | <b>B</b><br><b>D</b><br><b>C</b> | 70 g max.<br>95 g max.<br>150 g max. | <b>50</b>   | PCB, right angle                |  |
|   | <b>90</b>                           | 10.1 A; 125 Vac/<br>250 Vac <sup>4</sup> | <b>C</b><br><b>G</b>             | 150 g max.<br>355 g max.             | <b>60</b>   | PCB, left angle                 |  |
|   | <b>95</b>                           | 16.1 A; 125 Vac/<br>250 Vac <sup>5</sup> | <b>G</b>                         | 355 g max.                           | <b>70</b>   | Quick connect 0.110 in          |  |
|   |                                     |  | <b>99</b>                        | SPECIAL <sup>2</sup>                 |   |                                 |  |
|   |                                     |  |                                  | <b>A</b>                             | Pin plunger   | <b>01</b>                       | SPDT   |
|   |                                     |  |                                  | <b>B</b>                             | Short straight lever, 16,7 mm [0.66 in] length              | <b>03</b>                       | SPST-NO  |
|   |                                     |  |                                  | <b>C</b>                             | Standard straight lever, 18,7 mm [0.74 in] length           | <b>04</b>                       | SPST-NC  |
|   |                                     |  |                                  | <b>D</b>                             | Long straight lever, 24,8 mm [0.98 in] length               |                                 |  |
|   |                                     |  |                                  | <b>E</b>                             | Std sim. roller lever, 18,0 mm [0.71 in] length R 2,75 mm   |                                 |  |
|   |                                     |  |                                  | <b>F</b>                             | Roller lever, 16,6 mm [0.65 in] length Ø4,8 mm roller       |                                 |  |
|   |                                     |  |                                  | <b>H</b>                             | Small sim. roller lever, 17,9 mm [0.70 in] length R 1,3 mm  |                                 |  |
|   |                                     |  |                                  | <b>J</b>                             | Extended straight lever, 55,2 mm [2.17 in] length           |                                 |  |
|   |                                     |  |                                  | <b>K</b>                             | Straight lever, 35,2 mm [1.39 in] length                    |                                 |  |
|   |                                     |  |                                  | <b>L</b>                             | L-shaped lever, 31,5 mm [1.24 in] length                    |                                 |  |
|   |                                     |  |                                  | <b>M</b>                             | Large sim. roller lever, 21,1 mm [0.83 in] length R 2,45 mm |                                 |  |
|   |                                     |  |                                  | <b>S</b>                             | SPECIAL lever <sup>2</sup>                                  |                                 |  |

**NOTES:**

- <sup>1</sup> Nomenclature is for identification purposes only; not all combinations of model code are available. Please contact your Honeywell representative or distributor for assistance.
- <sup>2</sup> Terminal Type "99" or Actuator Type "S" designates a special and therefore requires a special designator character(s) at the end of the listing.
- <sup>3</sup> Switches with a 0.1 A, 3 A, or 6 A current rating may have an operating force choice of B (70 g max.), C (150 g max.), or D (95 g max.).
- <sup>4</sup> Switches with a 10.1 A current rating may only have an operating force of either "C" (150 g max.) or "G" (355 g max.).
- <sup>5</sup> Switches with a 16.1 A current rating may only have an operating force of "G" (355 g max.).
- <sup>6</sup> Gold-plated contacts only available with "15" and "55" current rating options.

# ZM and ZM1 Series

**Table 1. MICRO SWITCH™ ZM Series Specifications**

| Characteristic   | ZM10 Series (Logic Level)  | ZM50 Series (Standard Duty) | ZM90 Series (Power Duty) |
|--|--|-----------------------------|--------------------------|
| Circuitry  | SPDT, SPNC, SPNO   |                             |                          |
| Operating force (at pin plunger)                                       | 60 g, 104 g, 146 g, 249 g  | 104 g, 146 g, 249 g         | 249 g                    |
| Termination  | Solder (standard and extended), PCB (standard, left, or right)   |                             |                          |
| Sealing  | IP40   |                             |                          |
| Actuators, pin plunger standard<br>Levers (300 series stainless steel) | pin plunger, straight lever (5 lengths), simulated roller lever (3 styles), roller lever, L-shaped lever, special levers |                             |                          |
| Agency certification   | UL, cUL, CE, CQC, RoHS, and Reach compliant  |                             |                          |
| Operating temperature (manufacturer rated)                             | -40 °C to 125 °C [-40 °F to 257 °F]  |                             |                          |
| Mechanical endurance (cycles)  | 5,000,000 min. @ 400 cycles/minute max.  |                             |                          |
| Switch resistance (initial)  | 100 mΩ max.  | 100 mΩ max.                 | 300 mΩ max.              |
| Insulation resistance (initial)  | 100 MΩ min. (500 Vdc for 1 minute)   |                             |                          |
| Dielectric strength (initial)<br>(between live parts and ground)       | 1500 V RMS for one minute (≤0.5 ma leakage current)  |                             |                          |
| Plunger material   | PA (nylon)   |                             |                          |
| Case/cover material  | PA (nylon)   |                             |                          |
| Contact material   | gold-plated silver alloy   | silver alloy                | silver alloy             |

Note: Refer to engineering drawing for additional information.

**Table 2. MICRO SWITCH™ ZM Series Electrical Ratings**

| Switch option                                      | UL/cUL per UL 1054<br>File E12252, Temp 120 °C [248 °F]                  | CQC per GB15092.1<br>0 °C to 125 °C [32 °F to 257 °F]<br>μ (micro-disconnection) |
|--|--|--|
| ZM10 Series<br>(Gold-plated silver alloy contacts) | 0.1 A 30 Vdc, 6,000 cycles min.<br>0.1 A 125/250 Vac, 10,000 cycles min. | 0.1 A 30 Vdc<br>0.1 A 125/250 Vac<br>10,000 cycles                               |
| ZM50 Series<br>(Silver alloy contacts)             | 5 A 30 Vdc, 10,000 cycles min.<br>5 A 125/250 Vac, 10,000 cycles min.    | 5 A 125/250 Vac<br>10,000 cycles   |
| ZM90 Series<br>(Silver alloy contacts)             | 10.1 A 125/250 Vac, 6,000 cycles min.                                    | 10.1 A 125/250 Vac<br>10,000 cycles  |

# MICRO SWITCH™ Subminiature Basic Switches

**Table 3. MICRO SWITCH™ ZM1 Series Specifications**

| Characteristic  | ZM110 Series, ZM115 Series<br>(Logic Level)  | ZM150 Series, ZM155 Series,<br>ZM160 Series (Standard Duty)                                       | ZM190 Series, ZM195 Series<br>(Power Duty)  |
|---|--|---|---|
| Circuitry   | SPDT, SPNC, SPNO   |   |   |
| Operating force (at pin plunger)  | 70 g, 95 g, 150 g  | 70 g, 95 g, 150 g   | ZM190: 150 g, 355 g<br>ZM195: 355 g   |
| Termination   | solder (standard and extended); PCB (standard, left, or right), special termination                                      |   |   |
| Sealing   | IP40   |   |   |
| Actuators, pin plunger standard<br>Levers (300 series stainless<br>steel) | pin plunger, straight lever (5 lengths), simulated roller lever (3 styles), roller lever, L-shaped lever, special levers |   |   |
| Agency certification  | UL, cUL, CQC, ENEC, RoHS, and Reach compliant  |   |   |
| Operating temperature<br>(manufacturer rated)                             | ZM110: -40 °C to 125 °C<br>[-40 °C to 257 °F]<br>ZM115: 0 °C to 85 °C<br>[32 °F to 185 °F]                               | ZM150, ZM160: -40 °C to 125 °C<br>[-40 °C to 257 °F]<br>ZM155: 0 °C to 85 °C<br>[32 °F to 185 °F] | -40 °C to 125 °C<br>[-40 °C to 257 °F]  |
| Mechanical endurance (cycles)*<br>120 cycles/minute max.                  | 1,000,000 min.   | 1,000,000 min.  | ZM190 (150 G OF): 1,000,000 min.<br>ZM190 (355 g OF): 50,000 min.<br>ZM195: 50,000 min. |
| Switch resistance (initial)   | 300 mΩ max.  |   |   |
| Insulation resistance (initial)   | 100 MΩ min. (500 Vdc for 1 minute)   |   |   |
| Dielectric strength (initial)<br>(between live parts and ground)          | 1500 V RMS for one minute (≤0.5 ma leakage current)  |   |   |
| Plunger material  | PA (nylon)   |   |   |
| Case/cover material   | PBT (polyester)  | PBT (polyester)   | PA (nylon)  |
| Contact material  | silver alloy   |   |   |
| Contact material (optional)   | gold-plated silver alloy (ZM115 only)  | gold-plated silver alloy (ZM115 only)   | –   |

Note: Refer to engineering drawing for additional information

\*Refer to engineering drawing for additional detail of mechanical endurance

**Table 4. MICRO SWITCH™ ZM Series Electrical Ratings**

| Switch option | UL/cUL per 61058-1 File E12252                               | ENEC per IEC 61058-1<br>μ (Micro-disconnection)  | CQC per GB 15092.1<br>μ (Micro-disconnection)   |
|---------------|--|--|---|
| ZM110 Series  | 0.1 RA 125/250 Vac, 10,000 cycles min.<br>125 °C [257 °F]    | 0.1 A 125/250 Vac, 10,000 cycles<br>-40 °C to 125 °C [-40 °F to 257 °F]  |   |
| ZM115 Series  | 0.1 RA 125/250 Vac, 10,000 cycles min.<br>85 °C [185 °F]     | 0.1 A 125/250 Vac, 10,000 cycles<br>0 °C to 85 °C [32 °F to 185 °F]  |   |
| ZM150 Series  | 3 RA 125/250 Vac, 10,000 cycles min.<br>125 °C [257 °F]      | 3 A 125/250 Vac, 10,000 cycles<br>-40 °C to 125 °C [-40 °F to 257 °F]  |   |
| ZM155 Series  | 3 RA 125/250 Vac, 10,000 cycles min.<br>85 °C [185 °F]       | 3 A 125/250 Vac, 10,000 cycles<br>0 °C to 85 °C [32 °F to 185 °F]  |   |
| ZM160 Series  | 6 RA 125/250 Vac, 10,000 cycles min.<br>125 °C [257 °F]      | 6 A 125/250 Vac, 6 (2) A 125/250 Vac, 10,000 cycles<br>-40 °C to 125 °C [-40 °F to 257 °F]   |   |
| ZM190 Series  | 10.1 GPA 125/250 Vac, 10,000 cycles min.<br>125 °C [257 °F]  | 10.1 A 125/250 Vac, 6 (2) A 125/250 Vac, 10,000 cycles<br>-40 °C to 125 °C [-40 °F to 257 °F]  |   |
| ZM195 Series  | 16.1 GPA 125/250 Vac<br>10,000 cycles min.<br>55 °C [131 °F] | 16.1 (4) A 125/250 Vac<br>10,000 cycles<br>-40 °C to 85 °C [-40 °F to 185 °F]<br>16.1 A 125/250 Vac<br>6 (3) A 125/250 Vac<br>10,000 cycles<br>-40 °C to 125 °C [-40 °F to 257 °F] | 16.1 A 125/250 Vac<br>6 (3) A 125/250 Vac<br>10,000 cycles<br>-40 °C to 125 °C [-40 °F to 257 °F] |




RA – Resistive Amps (Resistive Load), GPA – General Purpose Amps (Inductive Load), X (Y) – X is max. resistive amps., and (Y) is max. inductive amps.

# ZM and ZM1 Series

- O.F. • Operating force
- R.F. • Release force
- P.T. • Pretravel
- O.T. • Overtravel
- D.T. • Differential travel
- O.P. • Operating position

**Table 5. MICRO SWITCH™ ZM Series Product Specifications and Listings**

Contact your Honeywell rep or distributor for additional listings

|   | Catalog Listing   | Circuitry/<br>Contact Material | Elect.<br>Rating<br>(page 6) | Termination      | Operate Force<br>max. g [oz] | Release Force<br>min. g [oz] | Free Position<br>from mounting<br>hole mm [in]<br>max. |
|---|-------------------|--------------------------------|------------------------------|------------------|------------------------------|------------------------------|--|
|  <p><b>Pin Plunger</b></p>   | <b>ZM10B10A01</b> | SPDT Gold Plated               | 0.1 A                        | Solder           | 60 [2.17]                    | 8 [0.28]                     | 9,3 [0.37]   |
|   | <b>ZM10B70A01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder      | 60 [2.17]                    | 8 [0.28]                     | 9,3 [0.37]   |
|   | <b>ZM10D70A01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder      | 104 [3.67]                   | 20 [0.70]                    | 9,3 [0.37]   |
|   | <b>ZM10E10A01</b> | SPDT Gold Plated               | 0.1 A                        | Solder           | 146 [5.15]                   | 35 [1.23]                    | 9,3 [0.37]   |
|   | <b>ZM10E20A01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (Straight)   | 146 [5.15]                   | 35 [1.23]                    | -  |
|   | <b>ZM10E50A01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (90° Right ) | 146 [5.15]                   | 35 [1.23]                    | -  |
|   | <b>ZM10E70A01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder      | 146 [5.15]                   | 35 [1.23]                    | 9,3 [0.37]   |
|   | <b>ZM10E70A03</b> | SPNO Gold Plated               | 0.1 A                        | Long Solder      | 146 [5.15]                   | 35 [1.23]                    | 9,3 [0.37]   |
|   | <b>ZM50E10A01</b> | SPDT Silver Alloy              | 5 A                          | Solder           | 146 [5.15]                   | 35 [1.23]                    | 9,3 [0.37]   |
|   | <b>ZM50E10A03</b> | SPNO Silver Alloy              | 5 A                          | Solder           | 146 [5.15]                   | 35 [1.23]                    | 9,3 [0.37]   |
|   | <b>ZM50E20A01</b> | SPDT Silver Alloy              | 5 A                          | PCB (Straight)   | 146 [5.15]                   | 35 [1.23]                    | -  |
|   | <b>ZM50E20A03</b> | SPNO Silver Alloy              | 5 A                          | PCB (Straight)   | 146 [5.15]                   | 35 [1.23]                    | -  |
|   | <b>ZM50E50A01</b> | SPDT Silver Alloy              | 5 A                          | PCB (90° Right ) | 146 [5.15]                   | 35 [1.23]                    | -  |
|   | <b>ZM50E70A01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder      | 146 [5.15]                   | 35 [1.23]                    | 9,3 [0.37]   |
|   | <b>ZM50G20A01</b> | SPDT Silver Alloy              | 5 A                          | PCB (Straight)   | 249 [8.78]                   | 50 [1.76]                    | -  |
|   | <b>ZM90G10A01</b> | SPDT Silver Alloy              | 10.1 A                       | Solder           | 249 [8.78]                   | 50 [1.76]                    | 9,3 [0.37]   |
|   | <b>ZM90G20A01</b> | SPDT Silver Alloy              | 10.1 A                       | PCB (Straight)   | 249 [8.78]                   | 50 [1.76]                    | -  |
| <b>ZM90G70A01</b>   | SPDT Silver Alloy | 10.1 A                         | Long Solder                  | 249 [8.78]       | 50 [1.76]                    | 9,3 [0.37]                   |  |
|  <p><b>Short<br/>Straight<br/>Lever<br/>(16,7 mm<br/>[0.66 in])</b></p>    | <b>ZM10E10B01</b> | SPDT Gold Plated               | 0.1 A                        | Solder           | 40 [1.41]                    | 6 [0.21]                     | 11,7 [0.46]  |
|   | <b>ZM10E50B01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (90° Right ) | 40 [1.41]                    | 6 [0.21]                     | -  |
|   | <b>ZM10G10B01</b> | SPDT Gold Plated               | 0.1 A                        | Solder           | 66 [2.33]                    | 9 [0.32]                     | 11,7 [0.46]  |
|   | <b>ZM50D10B01</b> | SPDT Silver Alloy              | 5 A                          | Solder           | 30 [1.06]                    | 3 [0.10]                     | 11,7 [0.46]  |
|   | <b>ZM50E10B01</b> | SPDT Silver Alloy              | 5 A                          | Solder           | 40 [1.41]                    | 6 [0.21]                     | 11,7 [0.46]  |
|   | <b>ZM50E20B01</b> | SPDT Silver Alloy              | 5 A                          | PCB (Straight)   | 40 [1.41]                    | 6 [0.21]                     | -  |
|   | <b>ZM50E50B01</b> | SPDT Silver Alloy              | 5 A                          | PCB (90° Right ) | 40 [1.41]                    | 6 [0.21]                     | -  |
|   | <b>ZM50E60B01</b> | SPDT Silver Alloy              | 5 A                          | PCB (90° Left)   | 40 [1.41]                    | 6 [0.21]                     | -  |
|   | <b>ZM50E70B01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder      | 40 [1.41]                    | 6 [0.21]                     | 11,7 [0.46]  |
|  <p><b>Standard<br/>Straight<br/>Lever<br/>(18,7 mm<br/>[0.74 in])</b></p> | <b>ZM10B70C01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder      | 14 [0.49]                    | 2 [0.07]                     | 12,0 [0.47]  |
|   | <b>ZM10E10C01</b> | SPDT Gold Plated               | 0.1 A                        | Solder           | 36 [1.27]                    | 6 [0.21]                     | 12,0 [0.47]  |
|   | <b>ZM10E20C01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (Straight)   | 36 [1.27]                    | 6 [0.21]                     | -  |
|   | <b>ZM50E10C01</b> | SPDT Silver Alloy              | 5 A                          | Solder           | 36 [1.27]                    | 6 [0.21]                     | 12,0 [0.47]  |
|   | <b>ZM50E70C01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder      | 36 [1.27]                    | 6 [0.21]                     | 12,0 [0.47]  |



# MICRO SWITCH™ Subminiature Basic Switches

O.F. • Operating force  
 R.F. • Release force  
 P.T. • Pretravel  
 O.T. • Overtravel  
 D.T. • Differential travel  
 O.P. • Operating position

|             | Free Position max. mm [in] from base of straight PCB terminal* | Free Position from formed PCB terminal center line mm [in] max. * | Operate point from mounting hole mm [in] | Operate point from base of straight PCB terminal mm [in]* | Operate point from formed PCB terminal center line mm [in]* | P.T. max. mm [in] | O.T. min. mm [in] | D.T. max. mm [in] |
|-------------|--|---|--|---|---|-------------------|-------------------|-------------------|
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 12,7 [0.50] | -  | -   | -  | 11,9 ±0,3 [0.47 ±0.01]                                    | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | 14,0 [0.55]  | -   | -  | -   | 13,2 ±0,3 [0.52 ±0.01]                                      | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 12,7 [0.50] | -  | -   | -  | 11,9 ±0,3 [0.47 ±0.01]                                    | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 12,7 [0.50] | -  | -   | -  | 11,9 ±0,3 [0.47 ±0.01]                                    | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | 14,0 [0.55]  | -   | -  | -   | 13,2 ±0,3 [0.52 ±0.01]                                      | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 12,7 [0.50] | -  | -   | -  | 11,9 ±0,3 [0.47 ±0.01]                                    | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 12,7 [0.50] | -  | -   | -  | 11,9 ±0,3 [0.47 ±0.01]                                    | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,5 ±0,3 [0.33 ±0.01]                    | -   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -           | -  | -   | 8,9 ±0,8 [0.35 ±0.03]                    | -   | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | 16,4 [0.65]  | -   | -  | -   | 13,6 ±0,8 [0.54 ±0.03]                                      | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,8 [0.35 ±0.03]                    | -   | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,8 [0.35 ±0.03]                    | -   | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,8 [0.35 ±0.03]                    | -   | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| 15,1 [0.59] | -  | -   | -  | 12,3 ±0,8 [0.48 ±0.03]                                    | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | 16,4 [0.65]  | -   | -  | -   | 13,6 ±0,8 [0.54 ±0.03]                                      | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | 16,4 [0.65]  | -   | -  | -   | 13,6 ±0,8 [0.54 ±0.03]                                      | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,8 [0.35 ±0.03]                    | -   | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,9 [0.35 ±0.04]                    | -   | -   | 4,0 [0.16]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,9 [0.35 ±0.04]                    | -   | -   | 4,0 [0.16]        | 0,6 [0.02]        | 0,8 [0.03]        |
| 15,4 [0.61] | -  | -   | -  | 12,3 ±0,9 [0.48 ±0.04]                                    | -   | 4,0 [0.16]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,9 [0.35 ±0.04]                    | -   | -   | 4,0 [0.16]        | 0,6 [0.02]        | 0,8 [0.03]        |
| -           | -  | -   | 8,9 ±0,9 [0.35 ±0.04]                    | -   | -   | 4,0 [0.16]        | 0,6 [0.02]        | 0,8 [0.03]        |

\* See asterisk on page 16 for dimension locations.

# ZM and ZM1 Series

- O.F. • Operating force
- R.F. • Release force
- P.T. • Pretravel
- O.T. • Overtravel
- D.T. • Differential travel
- O.P. • Operating position

**Table 5. MICRO SWITCH™ ZM Series Product Specifications and Listings, continued**

Contact your Honeywell rep or distributor for additional listings

|  | Catalog Listing   | Circuitry/<br>Contact Material | Elect.<br>Rating<br>(page 6) | Termination     | Operate Force<br>max. g [oz] | Release Force<br>min. g [oz] | Free Position<br>from mounting<br>hole mm [in]<br>max. |
|--|-------------------|--------------------------------|------------------------------|-----------------|------------------------------|------------------------------|--|
| <br><b>Long<br/>Straight<br/>Lever<br/>(24,8 mm<br/>[0.98 in])</b>              | <b>ZM10B10D01</b> | SPDT Gold Plated               | 0.1 A                        | Solder          | 13 [0.46]                    | 2 [0.07]                     | 13,5 [0.53]  |
|  | <b>ZM10B70D01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder     | 13 [0.46]                    | 2 [0.07]                     | 13,5 [0.53]  |
|  | <b>ZM10D10D01</b> | SPDT Gold Plated               | 0.1 A                        | Solder          | 20 [0.70]                    | 5 [0.18]                     | 13,5 [0.53]  |
|  | <b>ZM10D20D01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (Straight)  | 20 [0.70]                    | 5 [0.18]                     | -  |
|  | <b>ZM10E70D01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder     | 28 [0.99]                    | 4 [0.14]                     | 13,5 [0.53]  |
|  | <b>ZM50E10D01</b> | SPDT Silver Alloy              | 5 A                          | Solder          | 28 [0.99]                    | 4 [0.14]                     | 13,5 [0.53]  |
|  | <b>ZM50E50D01</b> | SPDT Silver Alloy              | 5 A                          | PCB (90° Right) | 28 [0.99]                    | 4 [0.14]                     | -  |
|  | <b>ZM50E70D01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder     | 28 [0.99]                    | 4 [0.14]                     | 13,5 [0.53]  |
| <br><b>Extended<br/>Straight<br/>Lever<br/>(55,2 mm<br/>[2.17 in])</b>          | <b>ZM50E70J01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder     | 12 [0.42]                    | 2,5 [0.09]                   | 19,2 [0.76]  |
| <br><b>Small Simu-<br/>lated Roller<br/>Lever<br/>(17,9 mm<br/>[0.70 in])</b> | <b>ZM10E20H01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (Straight)  | 34 [1.20]                    | 8 [0.28]                     | -  |
|  | <b>ZM50G10H01</b> | SPDT Silver Alloy              | 5 A                          | Solder          | 56 [1.98]                    | 13 [0.46]                    | 14,4 [0.57]  |
| <br><b>Standard<br/>Simulated<br/>Roller Lever<br/>(18 mm<br/>[0.71 in])</b>  | <b>ZM10B70E01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder     | 14 [0.49]                    | 2 [0.07]                     | 18,9 [0.74]  |
|  | <b>ZM10D10E01</b> | SPDT Gold Plated               | 0.1 A                        | Solder          | 26 [0.92]                    | 5 [0.18]                     | 18,9 [0.74]  |
|  | <b>ZM10D70E01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder     | 26 [0.92]                    | 5 [0.18]                     | 18,9 [0.74]  |
|  | <b>ZM10E10E01</b> | SPDT Gold Plated               | 0.1 A                        | Solder          | 35 [1.23]                    | 8 [0.28]                     | 18,9 [0.74]  |
|  | <b>ZM10E50E01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (90° Right) | 35 [1.23]                    | 8 [0.28]                     | -  |
|  | <b>ZM50E10E01</b> | SPDT Silver Alloy              | 5 A                          | Solder          | 35 [1.23]                    | 8 [0.28]                     | 18,9 [0.74]  |
|  | <b>ZM50E20E01</b> | SPDT Silver Alloy              | 5 A                          | PCB (Straight)  | 35 [1.23]                    | 8 [0.28]                     | -  |
|  | <b>ZM50E70E01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder     | 35 [1.23]                    | 8 [0.28]                     | 18,9 [0.74]  |

# MICRO SWITCH™ Subminiature Basic Switches

O.F. • Operating force  
 R.F. • Release force  
 P.T. • Pretravel  
 O.T. • Overtravel  
 D.T. • Differential travel  
 O.P. • Operating position

|  | Free Position max. mm [in] from base of straight PCB terminal* | Free Position from formed PCB terminal center line mm [in] max. * | Operate point from mounting hole mm [in] | Operate point from base of straight PCB terminal mm [in]* | Operate point from formed PCB terminal center line mm [in]* | P.T. max. mm [in] | O.T. min. mm [in] | D.T. max. mm [in] |
|--|--|---|--|---|---|-------------------|-------------------|-------------------|
|  | -  | -   | 8,9 ±1,5 [0.35 ±0.06]                    | -   | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | -   | 8,9 ±1,5 [0.35 ±0.06]                    | -   | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | -   | 8,9 ±1,5 [0.35 ±0.06]                    | -   | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | 16,9 [0.67]  | -   | -  | 12,3 ±1,5 [0.48 ±0.06]                                    | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | -   | 8,9 ±1,5 [0.35 ±0.06]                    | -   | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | -   | 8,9 ±1,5 [0.35 ±0.06]                    | -   | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | 18,2 [0.72]   | -  | -   | 13,6 ±1,5 [0.54 ±0.06]                                      | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | -   | 8,9 ±1,5 [0.35 ±0.06]                    | -   | -   | 6,1 [0.24]        | 0,8 [0.03]        | 1,5 [0.06]        |
|  | -  | -   | 8,9 ±3,0 [0.35 ±0.12]                    | -   | -   | 13,3 [0.52]       | 1,0 [0.04]        | 2,9 [0.11]        |
|  | 17,8 [0.70]  | -   | -  | 14,2 ±1,0 [0.56 ±0.04]                                    | -   | 4,6 [0.18]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | 10,8 ±1,0 [0.43±0.04]                    | -   | -   | 4,6 [0.18]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | 12,2 ±1,5 [0.48 ±0.06]                   | -   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | -  | -   | 12,2 ±1,5 [0.48 ±0.06]                   | -   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | -  | -   | 12,2 ±1,5 [0.48 ±0.06]                   | -   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | -  | -   | 12,2 ±1,5 [0.48 ±0.06]                   | -   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | -  | 23,6 [0.93]   | -  | -   | 16,9 ±1,5 [0.66 ±0.06]                                      | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | -  | -   | 12,2 ±1,5 [0.48 ±0.06]                   | -   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | 22,3 [0.88]  | -   | -  | 15,6 ±1,5 [0.61 ±0.06]                                    | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |
|  | -  | -   | 12,2 ±1,5 [0.48 ±0.06]                   | -   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |


\* See asterisk on page 16 for dimension locations.

# ZM and ZM1 Series

- O.F. • Operating force
- R.F. • Release force
- P.T. • Pretravel
- O.T. • Overtravel
- D.T. • Differential travel
- O.P. • Operating position

**Table 5. MICRO SWITCH™ ZM Series Product Specifications and Listings, continued**

Contact your Honeywell rep or distributor for additional listings

|  | Catalog Listing   | Circuitry/<br>Contact Material | Elect.<br>Rating<br>(page 6) | Termination     | Operate Force<br>max. g [oz] | Release Force<br>min. g [oz] | Free Position<br>from mounting<br>hole mm [in]<br>max. |
|--|-------------------|--------------------------------|------------------------------|-----------------|------------------------------|------------------------------|--|
| <br><b>Roller Lever</b><br><b>(16,6 mm</b><br><b>[0.65 in])</b>             | <b>ZM10B70F01</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder     | 19 [0.67]                    | 2 [0.07]                     | 17,6 [0.69]  |
|  | <b>ZM10E10F01</b> | SPDT Gold Plated               | 0.1 A                        | Solder          | 34 [1.23]                    | 8 [0.28]                     | 17,6 [0.69]  |
|  | <b>ZM10E50F01</b> | SPDT Gold Plated               | 0.1 A                        | PCB (90° Right) | 34 [1.23]                    | 8 [0.28]                     | -  |
|  | <b>ZM50D10F01</b> | SPDT Silver Alloy              | 5 A                          | Solder          | 25 [0.88]                    | 6 [0.21]                     | 17,6 [0.69]  |
|  | <b>ZM50E10F01</b> | SPDT Silver Alloy              | 5 A                          | Solder          | 34 [1.23]                    | 8 [0.28]                     | 17,6 [0.69]  |
|  | <b>ZM50E50F01</b> | SPDT Silver Alloy              | 5 A                          | PCB (90° Right) | 34 [1.23]                    | 8 [0.28]                     | -  |
|  | <b>ZM50E70F01</b> | SPDT Silver Alloy              | 5 A                          | Long Solder     | 34 [1.23]                    | 8 [0.28]                     | 17,6 [0.69]  |
|  | <b>ZM90G20F01</b> | SPDT Silver Alloy              | 10.1 A                       | PCB (Straight)  | 60 [2.17]                    | 15 [0.53]                    | -  |
| <br><b>L-Shaped</b><br><b>Lever</b><br><b>(31,5 mm</b><br><b>[1.24 in])</b> | <b>ZM50E10L01</b> | SPDT Silver Alloy              | 5 A                          | Solder          | 20 [0.71]                    | 4 [0.14]                     | 2,5 [0.10]   |

# MICRO SWITCH™ Subminiature Basic Switches

O.F. • Operating force  
 R.F. • Release force  
 P.T. • Pretravel  
 O.T. • Overtravel  
 D.T. • Differential travel  
 O.P. • Operating position

|  | Free Position max. mm [in] from base of straight PCB terminal* | Free Position from formed PCB terminal center line mm [in] max. * | Operate point from mounting hole mm [in] | Operate point from base of straight PCB terminal mm [in]* | Operate point from formed PCB terminal center line mm [in]* | P.T. max. mm [in] | O.T. min. mm [in] | D.T. max. mm [in] |
|--|--|---|--|---|---|-------------------|-------------------|-------------------|
|  | -  | -   | 14,6 ±0,8 [0.57 ±0.03]                   | -   | -   | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | 14,6 ±0,8 [0.57 ±0.03]                   | -   | -   | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | 22,3 [0.88]   | -  | -   | 19,3 ±0,8 [0.76 ±0.03]                                      | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | 14,6 ±0,8 [0.57 ±0.03]                   | -   | -   | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | 14,6 ±0,8 [0.57 ±0.03]                   | -   | -   | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | 22,3 [0.88]   | -  | -   | 19,3 ±0,8 [0.76 ±0.03]                                      | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | 14,6 ±0,8 [0.57 ±0.03]                   | -   | -   | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | 21,0 [0.83]  | -   | -  | 18,0 ±0,8 [0.71 ±0.03]                                    | -   | 3,8 [0.15]        | 0,8 [0.03]        | 0,8 [0.03]        |
|  | -  | -   | -5,2 ± 3,0 [-0.20 ±0.12]                 | -   | -   | 6,0 [0.24]        | 1,0 [0.04]        | 1,9 [0.07]        |





\* See asterisk on page 16 for dimension locations.

# ZM and ZM1 Series

O.F. • Operating force  
 R.F. • Release force  
 P.T. • Pretravel  
 O.T. • Overtravel  
 D.T. • Differential travel  
 O.P. • Operating position

**Table 6. MICRO SWITCH™ ZM1 Series Product Specifications and Listings**

Contact your Honeywell rep or distributor for additional listings

|   | Catalog Listing      | Circuitry/<br>Contact Material | Elect.<br>Rating<br>(page 7) | Termination    | Operate Force max.<br>g [oz] | Release Force min.<br>g [oz] |  |
|---|----------------------|--------------------------------|------------------------------|----------------|------------------------------|------------------------------|--|
| <br><b>Pin Plunger</b>   | <b>ZM110B70A01</b>   | SPDT Silver Alloy              | 0.1 A                        | Long Solder    | 70 [2.47]                    | 5 [0.18]                     |  |
|   | <b>ZM160C70A01</b>   | SPDT Silver Alloy              | 6 A                          | Long Solder    | 150 [5.29]                   | 25 [0.88]                    |  |
|   | <b>ZM190C60A01</b>   | SPDT Silver Alloy              | 10.1 A                       | PCB (90° Left) | 150 [5.29]                   | 25 [0.88]                    |  |
|   | <b>ZM195G10A03</b>   | SPNO Silver Alloy              | 16.1 A                       | Solder         | 355 [12.52]                  | 100 [3.53]                   |  |
| <br><b>Short<br/>Straight<br/>Lever<br/>(16,7 mm<br/>[0.66 in])</b>            | <b>ZM190C10B01</b>   | SPDT Silver Alloy              | 10.1 A                       | Solder         | 50 [1.76]                    | 6 [0.21]                     |  |
|   | <b>ZM195G10B04</b>   | SPNC Silver Alloy              | 16.1 A                       | Solder         | 118 [4.16]                   | 20 [0.71]                    |  |
| <br><b>Standard<br/>Straight<br/>Lever<br/>(18,7 mm<br/>[0.74 in])</b>        | <b>ZM115C70C01-G</b> | SPDT Gold Plated               | 0.1 A                        | Long Solder    | 45 [1.59]                    | 5 [0.18]                     |  |
|   | <b>ZM150C70C01</b>   | SPDT Silver Alloy              | 3 A                          | Long Solder    | 45 [1.59]                    | 5 [0.18]                     |  |
|   | <b>ZM190C10C01</b>   | SPDT Silver Alloy              | 10.1 A                       | Solder         | 45 [1.59]                    | 5 [0.18]                     |  |
| <br><b>Standard<br/>Simulated<br/>Roller Lever<br/>(18 mm<br/>[0.71 in])</b> | <b>ZM160C10E01</b>   | SPDT Silver Alloy              | 6 A                          | Solder         | 42 [1.48]                    | 6 [0.21]                     |  |

# MICRO SWITCH™ Subminiature Basic Switches

O.F. • Operating force  
 R.F. • Release force  
 P.T. • Pretravel  
 O.T. • Overtravel  
 D.T. • Differential travel  
 O.P. • Operating position


| Free Position from mounting hole mm [in] max. | Free Position from formed PCB terminal center line mm [in] max. * | Operate point from mounting hole mm [in] | Operate point from formed PCB terminal center line mm [in]* | P.T. max. mm [in] | O.T. min. mm [in] | D.T. max. mm [in] |
|---|---|--|---|-------------------|-------------------|-------------------|
| 9,4 [0.37]                                    | -   | 8,6 ±0,3 [0.34 ± 0.01]                   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 9,4 [0.37]                                    | -   | 8,6 ±0,3 [0.34 ± 0.01]                   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| -   | 14,0 [0.55]   | -  | 13,2 ±0,3 [0.52 ±0.01]                                      | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 9,4 [0.37]                                    | -   | 8,6 ±0,3 [0.34 ± 0.01]                   | -   | 1,1 [0.04]        | 0,4 [0.02]        | 0,2 [0.01]        |
| 11,8 [0.46]                                   | -   | 9,0 ±0,8 [0.35 ±0.03]                    | -   | 3,6 [0.14]        | 0,6 [0.02]        | 0,8 [0.03]        |
| 11,8 [0.46]                                   | -   | 8,6 ±1,3 [0.34 ±0.05]                    | -   | 4,6 [0.18]        | 0,5 [0.02]        | 1,5 [0.06]        |
| 12,1 [0.48]                                   | -   | 9,0 ±0,9 [0.35 ±0.04]                    | -   | 4,0 [0.16]        | 0,7 [0.03]        | 0,9 [0.04]        |
| 12,1 [0.48]                                   | -   | 9,0 ±0,9 [0.35 ±0.04]                    | -   | 4,0 [0.16]        | 0,7 [0.03]        | 0,9 [0.04]        |
| 12,1 [0.48]                                   | -   | 9,0 ±0,9 [0.35 ±0.04]                    | -   | 4,0 [0.16]        | 0,7 [0.03]        | 0,9 [0.04]        |
| 16,0 [0.63]                                   | -   | 12,3 ±1,5 [0.48 ±0.06]                   | -   | 5,2 [0.20]        | 0,6 [0.02]        | 0,9 [0.04]        |

\* See asterisk on page 17 for dimension locations.


# ZM and ZM1 Series

## MICRO SWITCH™ ZM SERIES MOUNTING DIMENSIONS


### General Mounting Dimensions

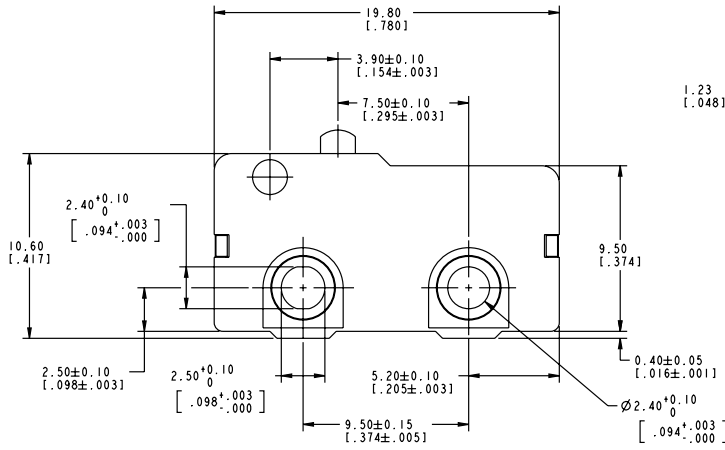


### Terminal Type 10 - Standard Solder

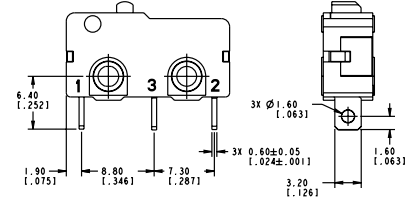


### Terminal Type 20 - Straight PCB

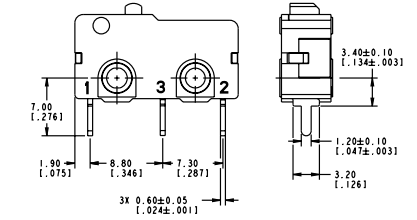


### Terminal Type 50 - Right PCB



### Terminal Type 60 - Left PCB




### Terminal Type 70 - Long Solder

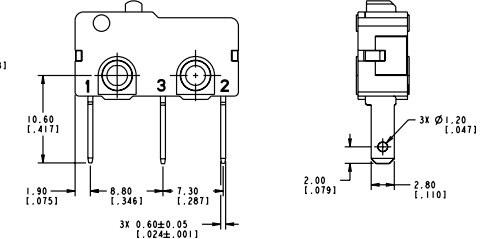


Actuator Types: All actuators except Type A and F are 4,05 mm ± 0,05 mm wide


### Type A




### Type B




### Type C




### Type D




### Type E




### Type F




### Type H




### Type J




### Type K




### Type L




### Type M



### Operate Point References for PCB Terminals\*



Terminal Type 50/60




Terminal Type 20




# MICRO SWITCH™ Subminiature Basic Switches

## MICRO SWITCH™ ZM1 SERIES MOUNTING DIMENSIONS


### General Mounting Dimensions

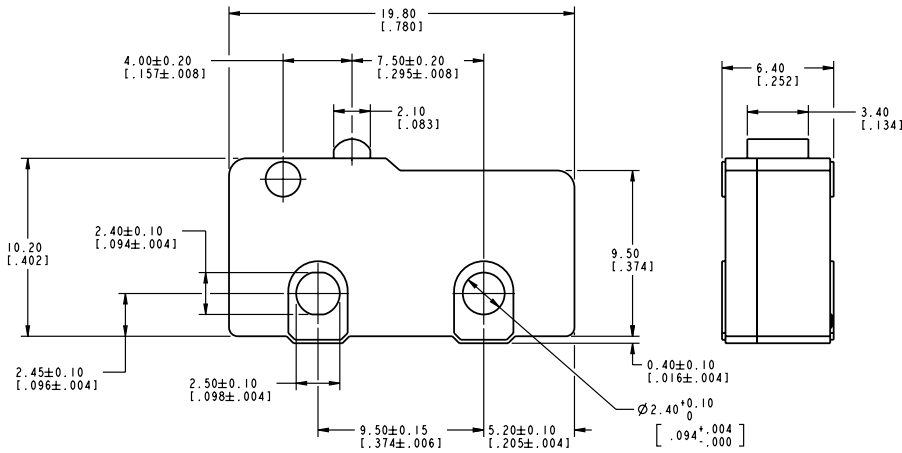


### Terminal Type 10 - Standard Solder

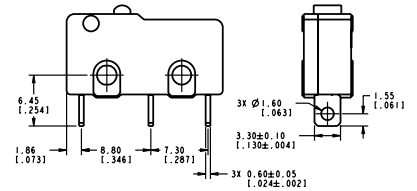


### Terminal Type 20 - Straight PCB

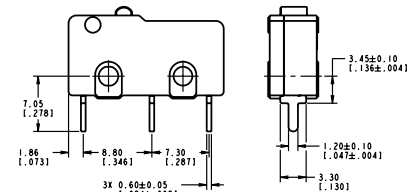


### Terminal Type 50 - Right PCB

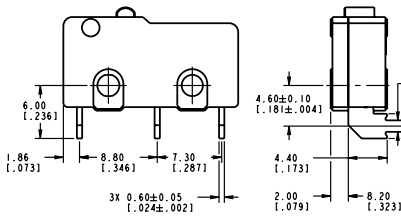

### Terminal Type 60 - Left PCB

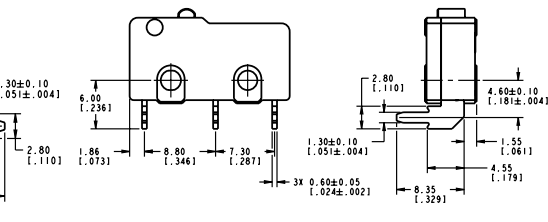


### Terminal Type 70 - Long Solder

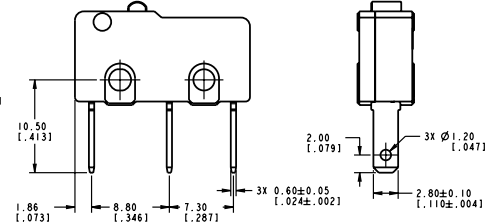


Actuator Types: All actuators except Type A and F are 4.05 mm ±0.05 mm wide


### Type A




### Type B




### Type C




### Type D




### Type E




### Type F




### Type H




### Type J




### Type K




### Type L




### Type M



### Operate Point References for PCB Terminals \*



Terminal Type 50/60



Terminal Type 20

# ZM and ZM1 Series

This Honeywell datasheet supports the following MICRO SWITCH™ ZM and ZM1 Series Basic Switch Listings

|            |            |            |               |
|------------|------------|------------|---------------|
| ZM10B10A01 | ZM90G70A01 | ZM10E70D01 | ZM50B50F01    |
| ZM10B70A01 | ZM10E10B01 | ZM50B70D01 | ZM50D10F01    |
| ZM10D70A01 | ZM10E50B01 | ZM50E10D01 | ZM50E10F01    |
| ZM10E10A01 | ZM10G10B01 | ZM50E50D01 | ZM50E50F01    |
| ZM10E20A01 | ZM50B10B01 | ZM50E70D01 | ZM50E70F01    |
| ZM10E50A01 | ZM50D10B01 | ZM50E70J01 | ZM90G20F01    |
| ZM10E70A01 | ZM50E10B01 | ZM10E20H01 | ZM50E10L01    |
| ZM10E70A03 | ZM50E20B01 | ZM50B10H01 | ZM110B70A01   |
| ZM50B10A01 | ZM50E50B01 | ZM50G10H01 | ZM115C70C01-G |
| ZM50B70A01 | ZM50E60B01 | ZM10B70E01 | ZM150C70C01   |
| ZM50E10A01 | ZM50E70B01 | ZM10D10E01 | ZM160C10E01   |
| ZM50E10A03 | ZM10B70C01 | ZM10D70E01 | ZM160C70A01   |
| ZM50E20A01 | ZM10E10C01 | ZM10E10E01 | ZM190C10B01   |
| ZM50E20A03 | ZM10E20C01 | ZM10E50E01 | ZM190C10C01   |
| ZM50E50A01 | ZM50E10C01 | ZM50E10E01 | ZM190C50P01   |
| ZM50E70A01 | ZM50E70C01 | ZM50E20E01 | ZM190C60A01   |
| ZM50G20A01 | ZM10B10D01 | ZM50E70E01 | ZM190C60P01   |
| ZM90G10A01 | ZM10B70D01 | ZM10B70F01 | ZM195G10A03   |
| ZM90G20A01 | ZM10D10D01 | ZM10E10F01 | ZM195G10B04   |
|            | ZM10D20D01 | ZM10E50F01 |               |

# MICRO SWITCH™ Subminiature Basic Switches

## ADDITIONAL INFORMATION

The following associated literature is available on the Honeywell web site at [sensing.honeywell.com](http://sensing.honeywell.com):

- Product installation instructions
- Product range guide
- Product nomenclature tree
- Product application-specific information
  - Application note: Sensors and switches for potential HVAC/R applications
  - Application note: Sensors and switches for potential medical applications
  - Technical bulletin: Applying precision switches
  - Technical bulletin: Low energy switch guide

### **WARNING**

#### **PERSONAL INJURY**

**DO NOT USE** these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARNING**

#### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

## WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

### **Find out more**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847** or **1-800-537-6945**, visit **sensing.honeywell.com**, or e-mail inquiries to **info.sc@honeywell.com**

Sensing and Control  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
**honeywell.com**

The Honeywell logo is displayed in a bold, red, sans-serif font.