


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS					DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 680			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
09	B	Redrawn - was chart dwg VUVT-***	J.W.M.	10/8/97	J.C.	10/27/97	B.B.	11/4/97
1194	C	Chg'd ele. file name	JWM	6/11/01	JC	6/20/01	JC	6/20/01

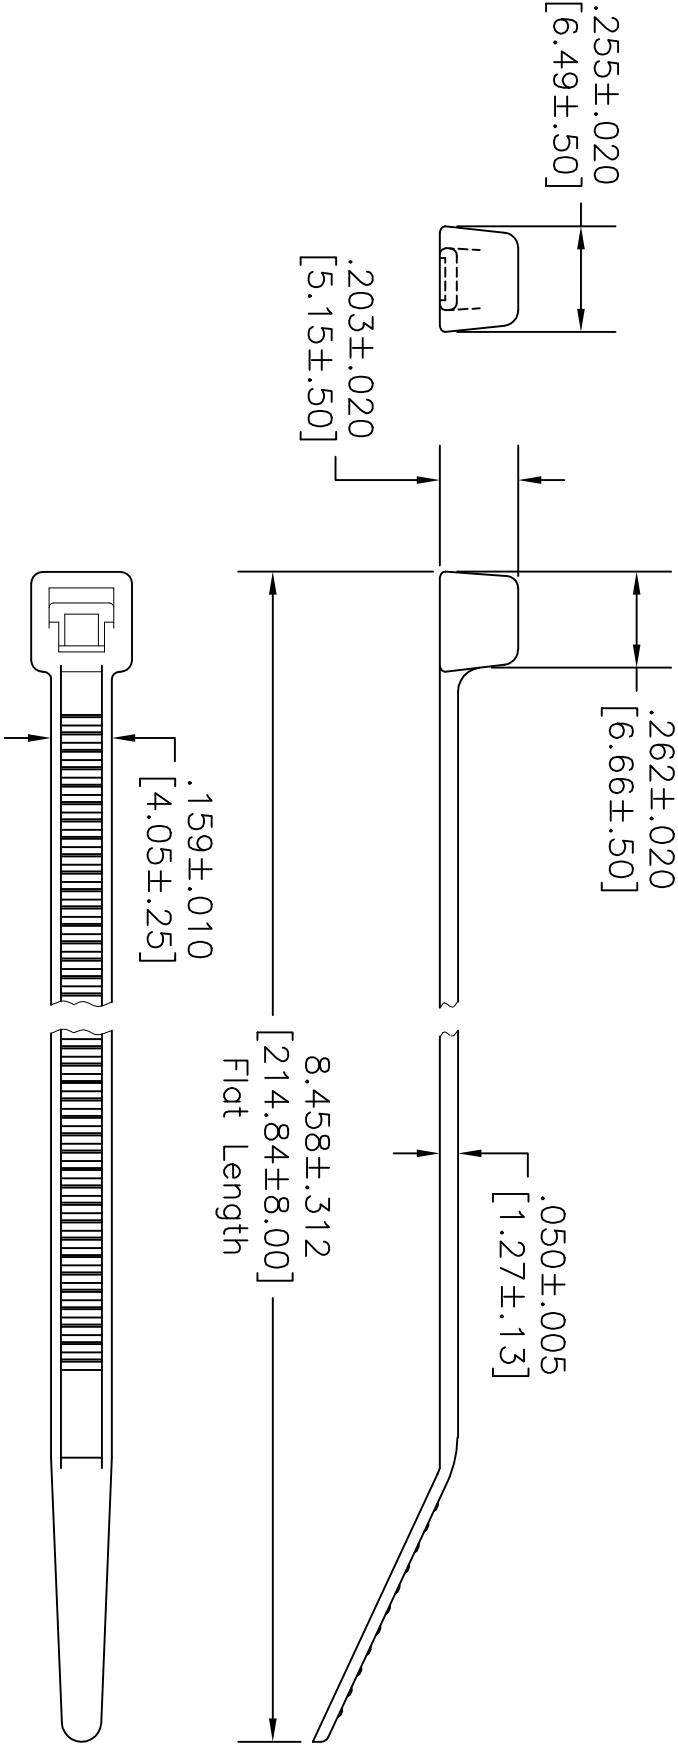

NOTES:

Material: Nylon 6/6-UV Stabilized

Color: Black

Packed: 1000 to Bag

Max. Bundle Dia: 2.00 [50.80]

Min. Bundle Dia: .063 [1.59]

Min. Loop Tensile Strength: 40lbs.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.				DRAWING TITLE: Cable Tie - UV Stabilized			
DRAWN BY:	DATE:	J.C.	12/22/91	SIZE	DWG. NO.	ELECTRONIC FILE	REV
CHECKED BY:	DATE:	J.C.	1/2/91	A	VUVT-16S-M	46N2684.dwg	C
APPROVED BY:	DATE:	J.L.	1/2/92	SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1