

- A. Electrostatic bubble shielding bags are made of metalised film, laminated to antistatic pink bubble film.
- B. This material offers excellent ESD protection combining the 'Faraday Cage' effect with an air gap. It also offers good mechanical protection and, being partially transparent, permits easy identification of contents. Its heavy-duty construction makes it suitable for re-use.
- C. The bags have a flap to enclose contents.



Specifications:

Electrical Properties

Surface Resistance:

Outer Layer

Inner Layer

Static Decay

Discharge Shielding

Charge Generation

Typical Values

1 x 10⁴ to < 1 x 10¹¹ ohms

1 x 10⁴ to < 1 x 10¹¹ ohms

<0.2s

<50nJ

Teflon: -0.03 nC/in²

Quartz: +0.10 nC/in²

Test Procedures/Method

IEC 61340-2-3

IEC 61340-2-3

MIL-STD-3010 4046

ANSI/ESD STM11.31

Modified Incline Plane

ESD ADV 11.2-1995

Physical Properties

Thickness:

Polyester

Antistatic PE

Bubble properties

Diameter

Height

Tensile strength

Puncture resistance

Transparency

MVTR

13 micron

60 micron

10mm

5mm

>15lbs/in²

>25lbs

>15%

<0.2g @ 100°F

ASTM D2103

ASTM D2103

N/A


N/A

ASTM D882

FTMS 10001C

ASTM D-1003-77

ASTM F 1249

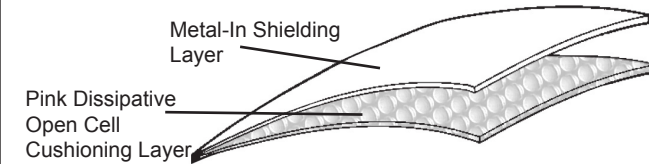

Shielding Bubble Bag Sizes

Item	Size (WxL)
VER-26878	150 x 255mm, 25mm Flap
VER-26879	200 x 255mm, 25mm Flap
VER-26880	255 x 305mm, 50mm Flap
VER-26881	355 x 455mm, 50mm Flap
VER-26882	455 x 455mm, 50mm Flap
Sold 10 per package	

Meets EN 61340-5-1 and Packaging standard IEC 61340-5-3 per IEC 61340-2-3 and ANSI/ESD STM11.31.

Unless otherwise noted, tolerance ±10%
Specifications and procedures subject to change without notice.



Made in the United Kingdom

Vermason

Shielding Bubble Bags

VERMASON
UNIT C, 4TH DIMENSION, FOURTH AVENUE, LETCHWORTH,
HERTS, SG6 2TD UK
PHONE: +44 (0) 1462-672005
E-MAIL: Service@Vermason.co.uk, INTERNET: Vermason.co.uk

Drawing Number
VER-26878

DATE:
August
2015