



Signal converters AC Part number 88950108




- Current/voltage conversion of Millenium 3 input signals
- PWM/voltage conversion of Millenium 3 output signals


	Type	Description	Input	Output
88950108	AC	0-20 mA/0-10 V input converter	4	4
88950112	AC	PWM/0-10 V output converter	1	1

Environmental characteristics		
Certifications	UL	UL
Protection rating	In accordance with IEC/EN 60529 : IP20 terminal block IP50 casing	In accordance with IEC/EN 60529 : IP20
Operating temperature	-20°→+85 °C	-20°→+55 °C
Storage temperature	-40°→+85 °C	-25°→+70 °C
Electrical characteristics		
Supply	-	24 V DC (+10 % / -15 %)
Input current	0-20 mA	-
Output voltage	0-10 V ± 5 %	0-10 V ± 5 %
Impedance	500 Ω (input)	250 Ω (maximum load)
Max. current	40 mA	40 mA (output)
Input PWM	-	24 V DC (+20 % / - 15 %, 120 Hz)
Short-circuit protection	-	Yes
Protection against polarity inversions	-	Yes (>10 s)
Absorbed power	0,8 W	1,3 W
Conversion time	-	440 ms (max) : 0 →100 % & 100 % →0
Mechanical characteristics		
Cable length	-	< 10 m with shielded cable

Dimension Diagram :

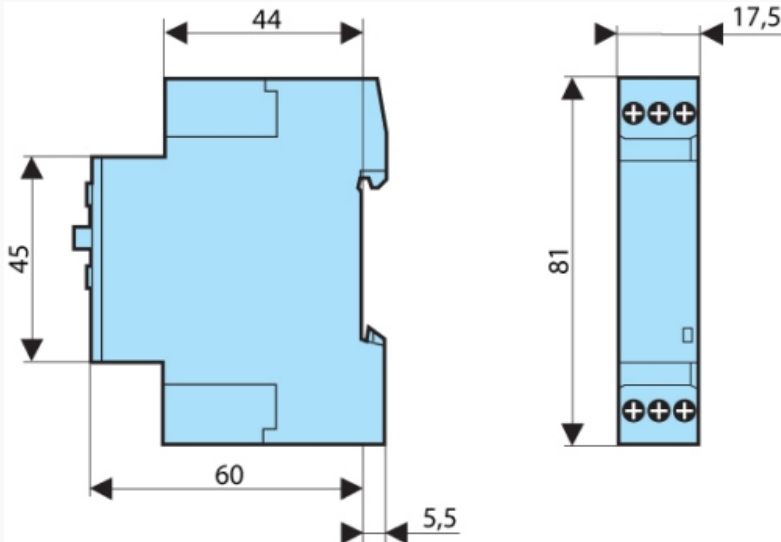


: PWM/0-10 V output converter

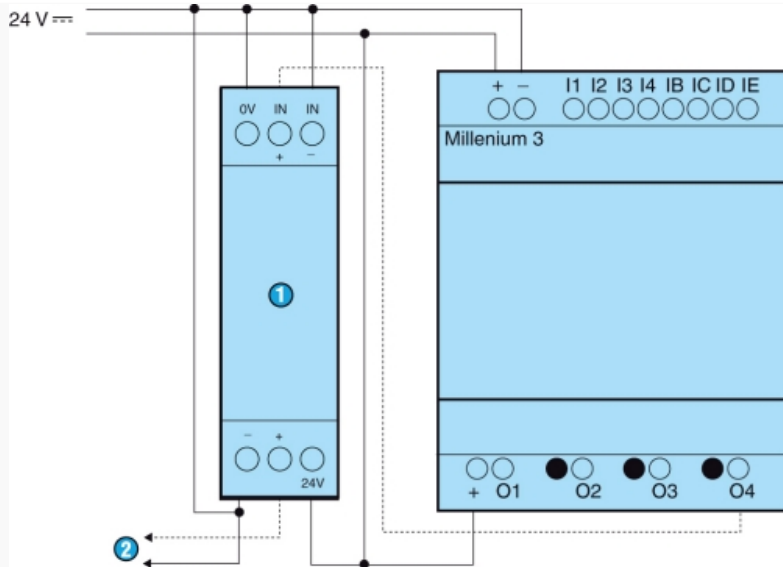

Legend

- 1 Converter PWM 0-10 V
- 2 Analog output 0-10 V

: 0-20 mA/0-10 V input converter

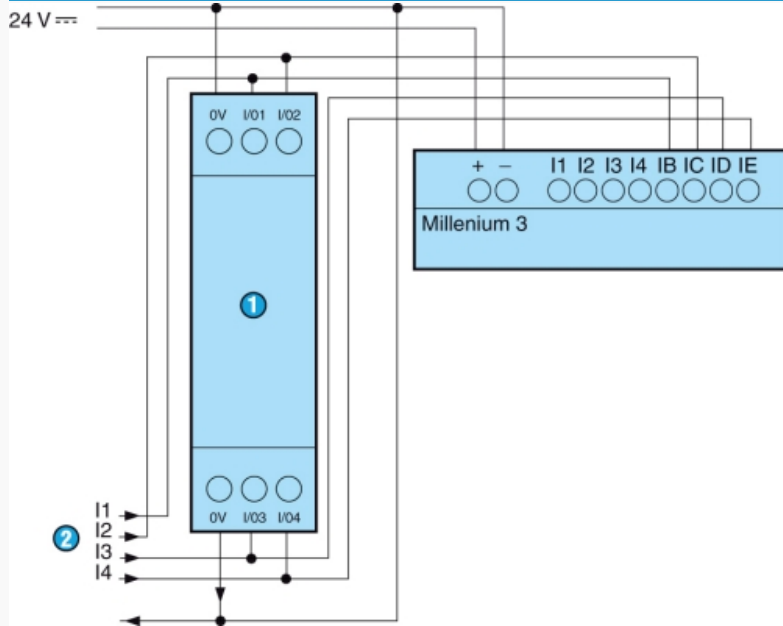

Legend

- 1 Converter 0-20 mA
- 2 Input 0-20 mA