


Male Horizontal Surface Mount

- Contact datamate@harwin.com for tape & reel options.
- Mates with female connectors shown on pages 38, 39, 41, 42, 44 and 46 to 50.
- Stamped contact ensures co-planarity.
- Board Mount provides PCB strain relief.

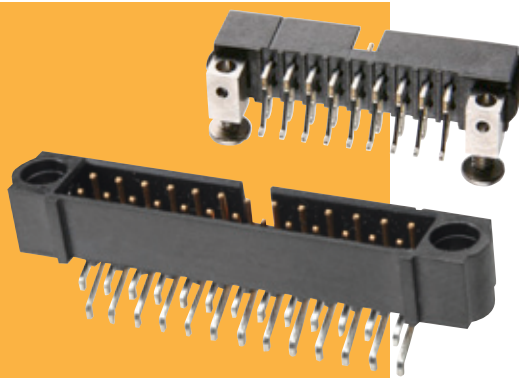

DATAMATE J-TEK

WITHOUT JACKSCREWS		WITH JACKSCREWS		WITH BOARD MOUNT		CALCULATION																	
						<table border="1"> <tr> <td>A</td> <td>$B + 12$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </table>		A	$B + 12$	B	Total no. of contacts - 2	C	$B + 7$	<p>(for Board Mount)</p> <p>Recommended PC Board Pattern</p>									
A	$B + 12$																						
B	Total no. of contacts - 2																						
C	$B + 7$																						
HOW TO ORDER																							
M80 - 5 XX XX XX																							
<table border="1"> <tr> <th colspan="2">SERIES CODE</th> </tr> <tr> <td>32</td> <td>With Jackscrews</td> </tr> <tr> <td>42</td> <td>With 3.5mm Board Mount</td> </tr> <tr> <td>43</td> <td>With 5mm Board Mount</td> </tr> <tr> <td>52</td> <td>Without Jackscrews</td> </tr> </table>		SERIES CODE		32	With Jackscrews	42	With 3.5mm Board Mount	43	With 5mm Board Mount	52	Without Jackscrews			<table border="1"> <tr> <th colspan="2">FINISH</th> </tr> <tr> <td>05</td> <td>Gold </td> </tr> <tr> <td>22</td> <td>Gold + Tin/Lead </td> </tr> <tr> <td>42</td> <td>Gold + Tin </td> </tr> </table>		FINISH		05	Gold	22	Gold + Tin/Lead	42	Gold + Tin
SERIES CODE																							
32	With Jackscrews																						
42	With 3.5mm Board Mount																						
43	With 5mm Board Mount																						
52	Without Jackscrews																						
FINISH																							
05	Gold																						
22	Gold + Tin/Lead																						
42	Gold + Tin																						
				<table border="1"> <tr> <th colspan="2">TOTAL NO. OF CONTACTS</th> </tr> <tr> <td colspan="2">04 to 50</td> </tr> </table> <p>Even numbers only</p>		TOTAL NO. OF CONTACTS		04 to 50															
TOTAL NO. OF CONTACTS																							
04 to 50																							

All dimensions in mm.