

# Miniature ABS Box

## HBT3 Series



### General ABS HF-0660I

Properties at 23°C	Test Method	Test Condition	Unit	Value
<b>Physical Properties</b>				
Specific Gravity	ASTM D792	Natural Colour	-	1.04
Water Absorption	ASTM D570	24hr,immersion in water	%	0.3
Melt Flow Index	ASTM D1238	200°C/5kg	g/10min	3.8
Mold Shrinkage	ASTM D955	-	%	0.3 ~ 0.6
<b>Mechanical Properties</b>				
Tensile Strength	ASTM D638	5mm/min	MPa(psi) kgf/cm <sup>2</sup>	43(6,300) 440
Flexural Strength	ASTM D790	2.8mm/min	MPa(psi) kgf/cm <sup>2</sup>	61(8,800) 620
Flexural Modulus	ASTM D790	2.8mm/min	MPa(psi) kgf/cm <sup>2</sup>	2,200(310,000) 22,000
Izod Impact Strength (Notched)	ASTM D256	1/4 inch	J/m(ft·lbf/in) kgf·cm/cm	196(3.7) 20
		1/8 inch	J/m(ft·lbf/in) kgf·cm/cm	245(4.6) -
Rockwell Hardness	ASTM D785	R-scale	-	106
<b>Thermal Properties</b>				
Heat Deflection Temperature (unannealed),1/4"	ASTM D648	1.8MPa	°F	185
			°C	85
Vicat Softening Temperature (unannealed)	ISO R 306	B/50	°F	207
			°C	97
<b>Flammability</b>				
UL 94 Classification	UL94	1.5mm specimen	Recognized	HB


**Note:**

The above values are only the representatives of natural colour specimen, not for guarantee

# Miniature ABS Box HBT3 Series



## Diagram

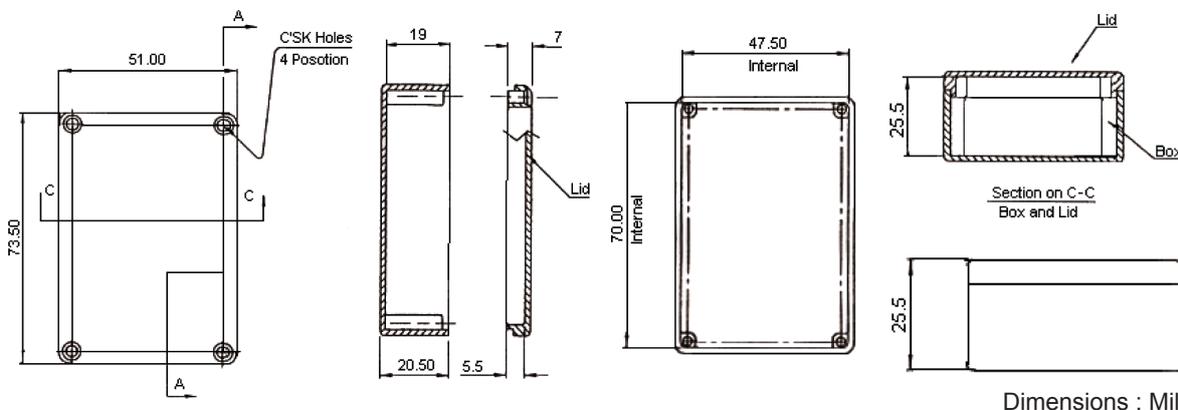

Dimensions : Millimetres

## Specification Table

Part Number	Colour	Overall Dimensions			Nominal Thickness
		A	B	C	
HBT3	Black	73.5mm	51mm	25.5mm	1.75mm
HBT3W	White				

**Material Designation** : HF-06601+

**Product Description** : Acrylonitrile Butadiene Styrene (ABS), furnished as pellets

Colour	Min Thick (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	1.5	HB	4	0	60	60	60
	3	HB	3	0	60	60	60
	6	HB	2	0	60	60	60

Comparative Tracking Index (CTI) : 2

High-Voltage Arc Tracking Rate (HVTR) : 2

(D495) : 7

UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

## Part Number Table

Description	Part Number
HBT3 Series - Miniature ABS Box	HBT3
	HBT3W

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com  
www.farnell.com  
www.newark.com

