


Capacitor, Stacked Ceramic, 47 uF, +/-20% Tol, 25 V, X7R, 2220-2

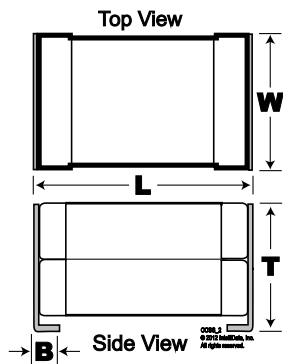

General Information	
Supplier:	KEMET
Style:	SMD Chip
Application:	Stacked Chip
Chip Size:	2220-2
Temperature Coefficient:	X7R
Part Type Description:	SMD, MLCC, Stacked, Double Chip, Temp Stable
Termination Type:	Tin (Sn)
Marked:	No
RoHS:	Yes

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	6	+/-0.5
W	5	+/-0.5
T	5	+/-0.50
B	1.6	+/-0.3

Packaging Specifications	
Package Kind:	T&R
Package Size:	7 in/180 mm
Package Type:	Plastic Tape
Package Quantity:	200

Specifications	
Capacitance:	47 uF
Voltage:	25 V
Tolerance:	+/-20%
Temperature Range:	-55/+125C
Dissipation Factor:	3.5%
Failure Rate:	N/A
Aging Rate:	3% loss/decade hour
Insulation Resistance:	10 MOhm
Dielectric Strength:	62.5 V
Miscellaneous:	Note: Referee time for X7R dielectric for this part number is 1000 hours