

UWP

5.5mmL Chip Type, Bi-Polarized




- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).



Specifications


Item	Performance Characteristics												
Category Temperature Range	-40 to +85°C												
Rated Voltage Range	6.3 to 50V												
Rated Capacitance Range	0.1 to 100μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.05CV or 10 (μA) ,whichever is greater.												
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C												
	Rated voltage (V) tan δ (MAX.)	6.3 0.24	10 0.20	16 0.17	25 0.17	35 0.15	50 0.15						
Stability at Low Temperature	Measurement frequency : 120Hz												
	Rated voltage (V)	6.3	10	16	25	35	50						
Endurance	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	4	3	2	2	2						
		Z-40°C / Z+20°C	8	6	4	4	3						
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C with the polarity inverted every 250 hours.		<table border="1"> <tr> <td>Capacitance change</td> <td>tan δ</td> <td>Leakage current</td> </tr> <tr> <td>Within ±20% of the initial capacitance value</td> <td>200% or less than the initial specified value</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	tan δ	Leakage current	Within ±20% of the initial capacitance value	200% or less than the initial specified value	Less than or equal to the initial specified value
	Capacitance change	tan δ	Leakage current										
Within ±20% of the initial capacitance value	200% or less than the initial specified value	Less than or equal to the initial specified value											
Resistance to soldering heat	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.		<table border="1"> <tr> <td>Capacitance change</td> <td>tan δ</td> <td>Leakage current</td> </tr> <tr> <td>Within ±10% of the initial capacitance value</td> <td>Less than or equal to the initial specified value</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	tan δ	Leakage current	Within ±10% of the initial capacitance value	Less than or equal to the initial specified value	Less than or equal to the initial specified value
	Capacitance change	tan δ	Leakage current										
Within ±10% of the initial capacitance value	Less than or equal to the initial specified value	Less than or equal to the initial specified value											
Marking	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		<table border="1"> <tr> <td>Capacitance change</td> <td>tan δ</td> <td>Leakage current</td> </tr> <tr> <td>Within ±10% of the initial capacitance value</td> <td>Less than or equal to the initial specified value</td> <td>Less than or equal to the initial specified value</td> </tr> </table>					Capacitance change	tan δ	Leakage current	Within ±10% of the initial capacitance value	Less than or equal to the initial specified value	Less than or equal to the initial specified value
	Capacitance change	tan δ	Leakage current										
Within ±10% of the initial capacitance value	Less than or equal to the initial specified value	Less than or equal to the initial specified value											
After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.													
Black print on the case top.													

Chip Type

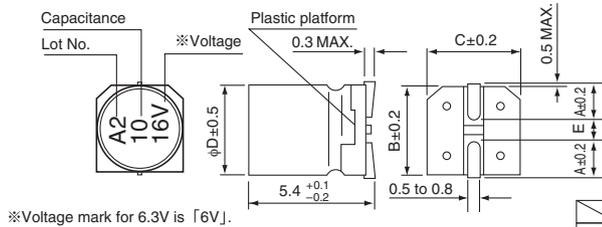

φD	4	5	6.3	8
A	1.8	2.1	2.4	3.3
B	4.3	5.3	6.6	8.3
C	4.3	5.3	6.6	8.3
E	1.0	1.3	2.2	2.3

Type numbering system (Example : 16V 10μF)

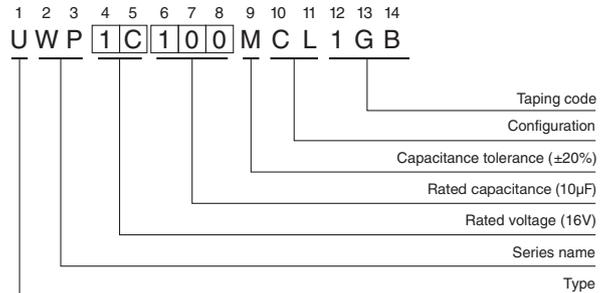

Dimensions

Cap. (μF)	Code	V		6.3		10		16		25		35		50	
		0J	1A	1C	1E	1V	1H								
0.1	0R1													4	1.0
0.22	R22													4	2.0
0.33	R33													4	2.8
0.47	R47													4	4.0
1	010													4	8.4
2.2	2R2													4	13
3.3	3R3									5	12	5	16	5	17
4.7	4R7							4	12	5	16	5	18	6.3	20
10	100			4	17	5	23	6.3	27	6.3	29	8	36		
22	220	5	28	6.3	33	6.3	37	8	50	8	54				
33	330	6.3	37	6.3	41	6.3	49	8	61						
47	470	6.3	45	8	61	8	75								
100	101	8	82												

Rated ripple current (mArms) at 85°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUN(p.160) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.