## **0.56" Three Digit Common** Cathode LED Display

# multicomp



#### Specifications

: GaAlAs
: 660 nm
: Super Red
: White Diffused
: 4.2
: Black


#### Electrical / Optical Characterisitics at T<sub>A</sub> = 25°C

Parameter	Symbol	Min	Тур	Мах	Unit	Test
Luminous Intensity	IV	2	4.2	5.8	mcd	
Viewing Angle	2⊖1/2	-	-	-	deg	
Peak Emission Wavelength	λρ	-	660	-	nm	  F = 20mA
Dominant Wavelength	λD	-	643	-	nm	
Spectral Line Half-Width	Δλ	-	20	-	nm	]
Forward Voltage	VF	1.7	1.85	2.5	V	
Power Dissipation	Pd	-	-	85	mW	
Peak Forward Current (Duty1/10 @ 1kHz)	I⊧ (Peak)	-	-	100	mA	
Recommended Operating Current	TF (Rec)	-	20	-	mA	


#### Absolute Maximum Rating T<sub>A</sub> = 25°C

Reverse Voltage	5 Volt
Reverse Current	10µA (VR=5V)
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +100°C
Lead Soldering Temperature Range (1.6mm (1/16 inch) from body)	260°C For 5 Seconds

#### **Typical Electro-Optical Characteristics Curves**




www.element14.com www.farnell.com www.newark.com





## **0.56" Three Digit Common** Cathode LED Display

## multicomp

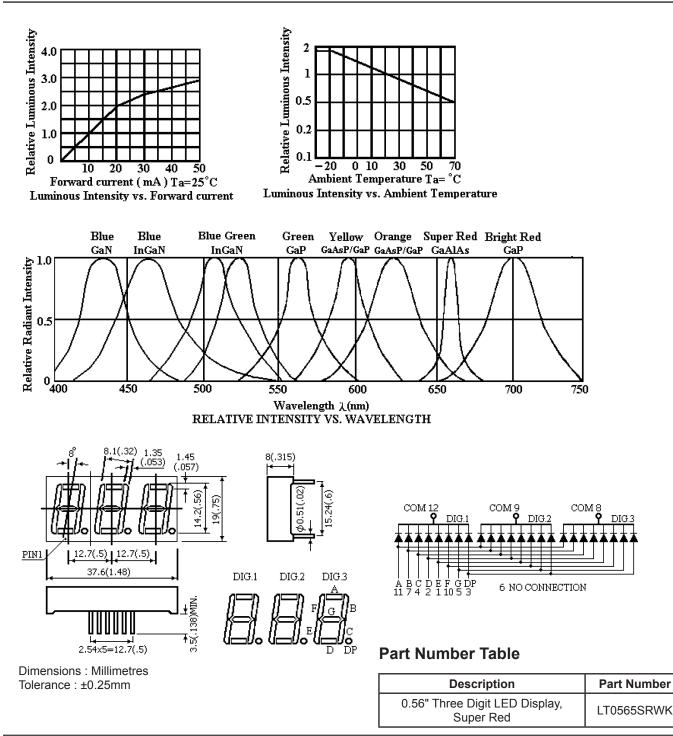

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

