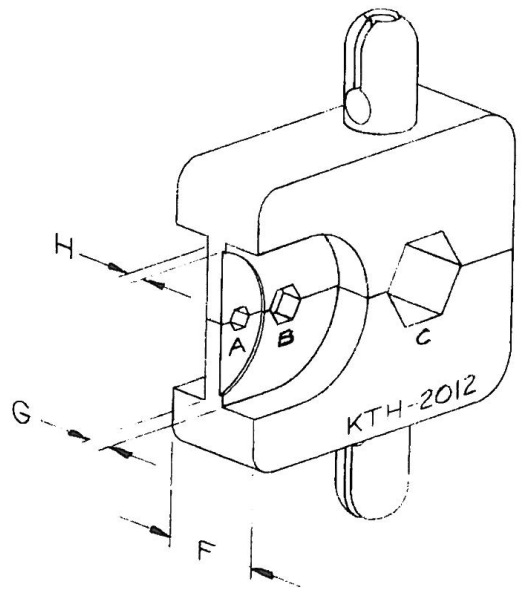


DASH NO.	M CODE	MALL FROM					
							
		REVISIONS <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">ISSUE</th> <th>CHANGES</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">2</td> <td>CN 27547 C AT 2 DEC 85</td> </tr> </tbody> </table> S-D		ISSUE	CHANGES	2	CN 27547 C AT 2 DEC 85
ISSUE	CHANGES						
2	CN 27547 C AT 2 DEC 85						
		SCALE: USED ON: REF: FINISH SPEC. MATL. SPEC. CRIMP DIE DRAWN MJB DATE 16 JUL 79 APPR. GIND DATE 16 JUL 79					
		KINGS ELECTRONICS 40 MARBLEDALE ROAD TUCKAHOE, N. Y. 10707 KTH-2012 S-D					

NOTES:

1. FOR USE WITH RG-5, G, 21, 143, 212, 222, 304, BELDEN 8031 & W.E. 724 CABLE GROUPS.

HEX SIZES (ACROSS FLATS)				DIE WIDTH	WEB WIDTH			
A	B	C	D	F	G	H	I	
.069	.100	.324	—	.400	.093	.080	—	

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
 3 PLACE DECIMALS $\pm .004$
 ANGLES $\pm 0^\circ 30'$
 T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX
 3. NO FILLETS PERMITTED.
 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
 5. ALL DIMENSIONS PRIOR TO PLATING.