

Bus system flat-type plug - SACC-DSIV-M12FSD-4CON-L90 - 1534630

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system flush-type socket, Ethernet, 4-pos., M12, shielded, D-coded, rear/screw mounting, with angled solder connection



Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	 4 046356 026802
Weight per Piece (excluding packing)	10.82 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C
Degree of protection	IP67

General

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Insulation resistance	≥ 100 MΩ
Coding	D - data
Standards/regulations	M12 connector IEC 61076-2-101
Status display	No
Overvoltage category	II
Degree of pollution	3
Connection method	Solder pins

Bus system flat-type plug - SACC-DSIV-M12FSD-4CON-L90 - 1534630

Technical data

General

Mounting type	Rear mounting M12 x 1 With locking nut
---------------	--

Material


Flammability rating according to UL 94	HB
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR

Standards and Regulations

Standard designation	M12 connector
Standards/regulations	IEC 61076-2-101
Flammability rating according to UL 94	HB


Drawings

Schematic diagram




Pin assignment M12 socket, 4-pos., D-coded, female side

Drilling diagram

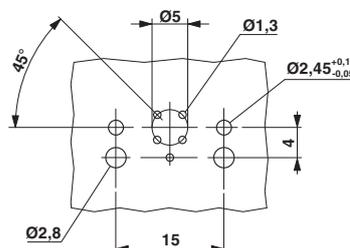


M12 flush-type connector

Dimensional drawing

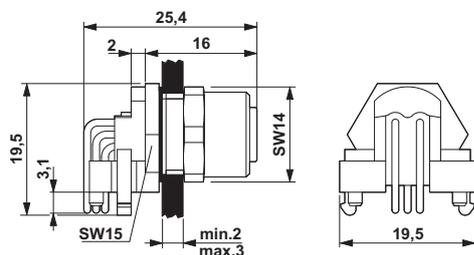

M12 flush-type connector

Dimensional drawing



Panel cutout

Bus system flat-type plug - SACC-DSIV-M12FSD-4CON-L90 - 1534630

Classifications

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001
eCl@ss 8.0	27440103
eCl@ss 9.0	27440102

ETIM

ETIM 2.0	EC001297
ETIM 3.0	EC002061
ETIM 4.0	EC000830
ETIM 5.0	EC002061

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Approvals

Approvals

Approvals

UL Recognized / EAC / EAC / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized

Bus system flat-type plug - SACC-DSIV-M12FSD-4CON-L90 - 1534630

Approvals

EAC

EAC

UL Recognized	
Nominal current IN	4 A
Nominal voltage UN	250 V

cUL Recognized	
Nominal current IN	4 A
Nominal voltage UN	250 V

EAC

cULus Recognized 