


F0-52851-A		DRAWN		SLBLUM		18JULY 77		CHECK		GJH		24JULY 77		CHECK		REVISIONS		ISSUE		DRAWING NUMBER		5ML31		RELEASE NO. PR-6617		REPLACES	
A 0055051-B		J A P		14 DEC 84		B 0074287		6 J W		19 APR 93						3		X		X		M					

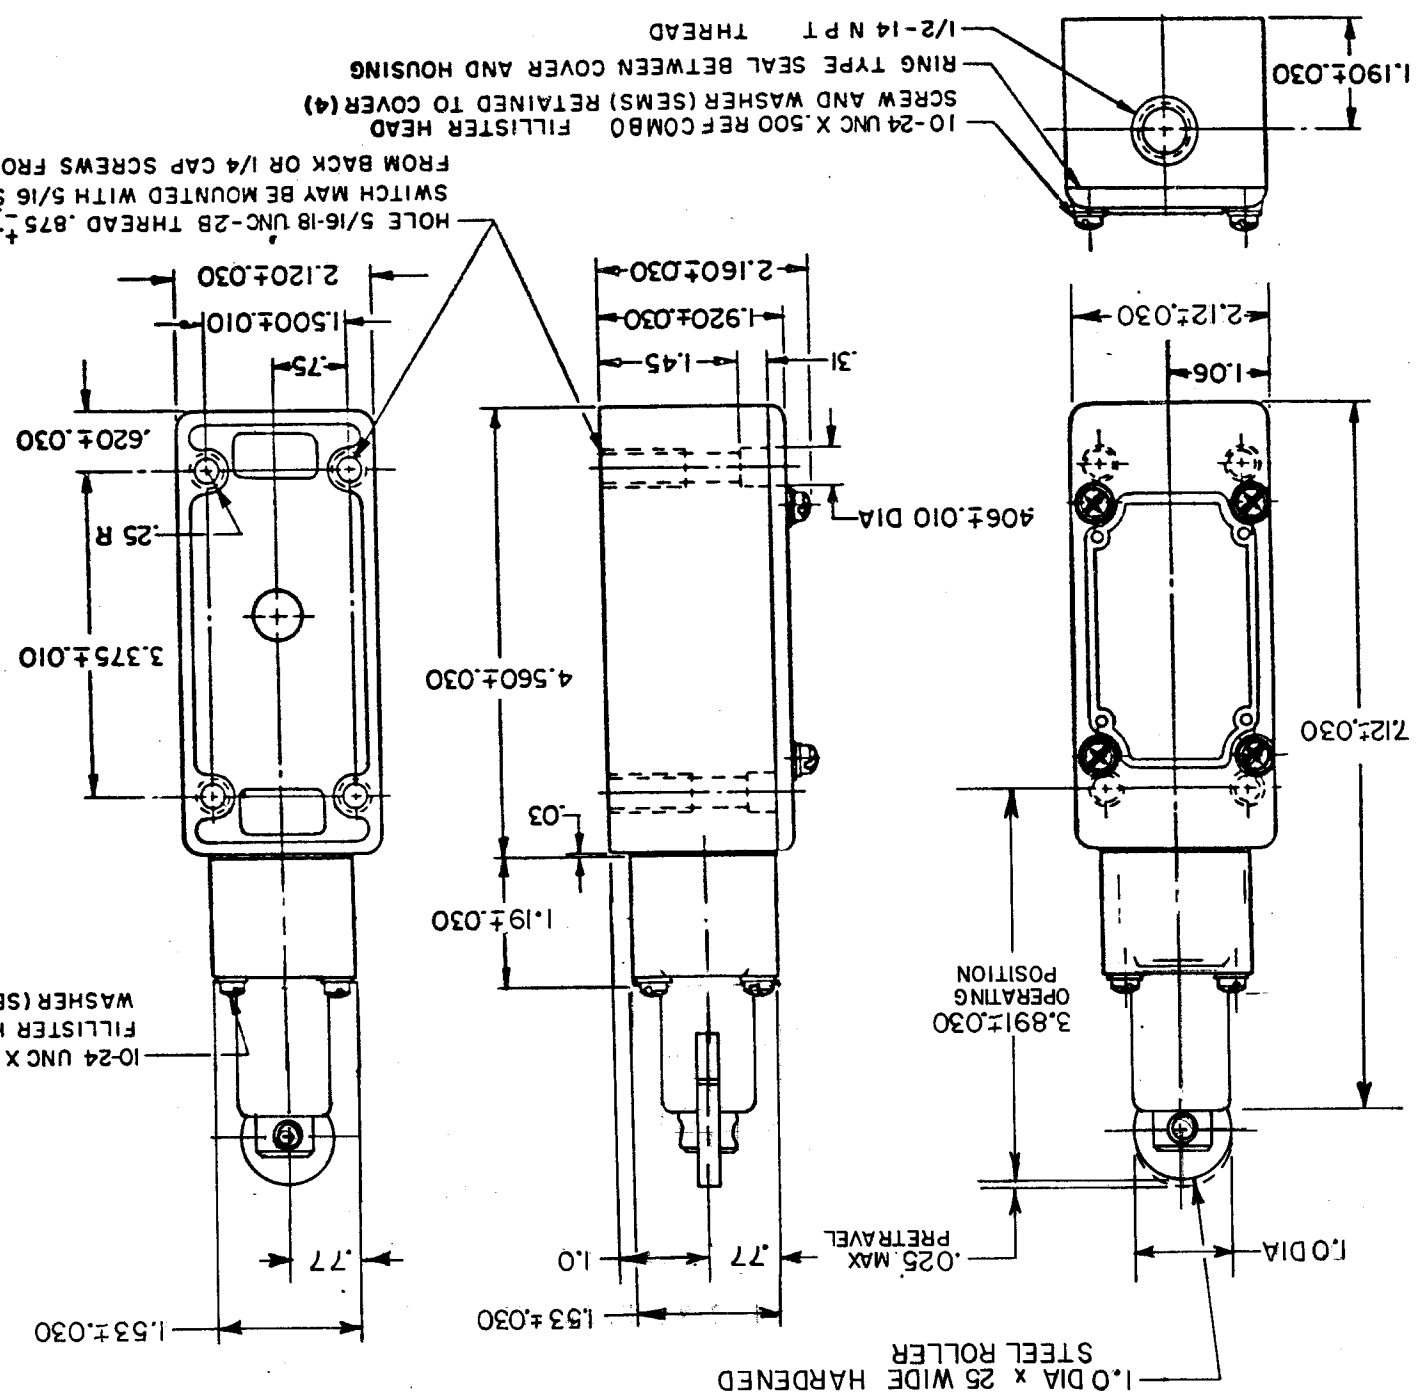

NOTES

- 1 - ROLLER ASSEMBLY MAY BE RE-ASSEMBLED 90° FROM POSITION SHOWN
- 2 - IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT
- 3 - SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 40°F

CHARACTERISTICS		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.	
OPERATING FORCE ----- 6 LBS APPROX		ELECTRICAL DATA	
RELEASE FORCE ----- 4 LBS APPROX		CONTACT ARRANGEMENT	
DIFFERENTIAL TRAVEL ----- .005 MAX		S P D T	
OVERTRAVEL ----- .500 MIN		PILLOT DUTY RATING 600 VAC 3/4HP 20 VAC 1/2HP-240VAC 1/2A-1.5 VDC 1/4A-230 VDC	
SWITCH-BASIC REPLACEMENT----- 1MK1		SCALE 1/2 TO 1	
		DO NOT SCALE PRINT	
		TOLERANCES	
		APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1	
		DESIGN UNITS	
		RAW MATERIAL-COMMERCIAL STANDARD	
		MICRO SWITCH STANDARDS APPLY	
		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED	
		WEIGHT	