

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0015249104](#)

**Status:** **Active**

**Overview:** [Mini-Fit® Blind Mate Interface \(BMI\) Connectors](#)

**Description:** Mini-Fit® BMI Header, Dual Row, Right Angle, with Snap-in Plastic Peg PCB Lock, 10 Circuits, PA Polyamide Nylon 6/6, UL 94V-0, with Tin (Sn) Plating

**Documents:**

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-45750-001-001 \(PDF\)](#)

[Product Specification PS-5556-002-001 \(PDF\)](#)

[Product Specification TS-42404-001-001 \(PDF\)](#)

[Product Specification TS-5556-002-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**


CSA LR19980  
UL E29179

**General**

Product Family PCB Headers  
Series [42404](#)  
Application Board-to-Board, Power, Wire-to-Board  
Comments Current = 13A max. per circuit when header is mated to a receptacle loaded with [45750](#) Mini-Fit® Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information.  
Overview [Mini-Fit® Blind Mate Interface \(BMI\) Connectors](#)  
Product Name Mini-Fit® BMI  
UPC 800754210034

**Physical**

Breakaway No  
Circuits (Loaded) 10  
Circuits (maximum) 10  
Color - Resin Natural (White)  
Durability (mating cycles max) 30  
Flammability 94V-0  
Glow-Wire Compliant No  
Guide to Mating Part Yes  
Lock to Mating Part Yes  
Material - Metal Brass  
Material - Plating Mating Tin  
Material - Plating Termination Tin  
Material - Resin Nylon  
Net Weight 4.082/g  
Number of Rows 2  
Orientation Right Angle  
PC Tail Length 3.30mm  
PCB Locator Yes  
PCB Retention Yes  
PCB Thickness - Recommended 1.80mm  
Packaging Type Tray  
Pitch - Mating Interface 4.20mm  
Plating min - Mating 2.540µm  
Plating min - Termination 2.540µm  
Polarized to Mating Part Yes  
Polarized to PCB Yes  
Shrouded Partial

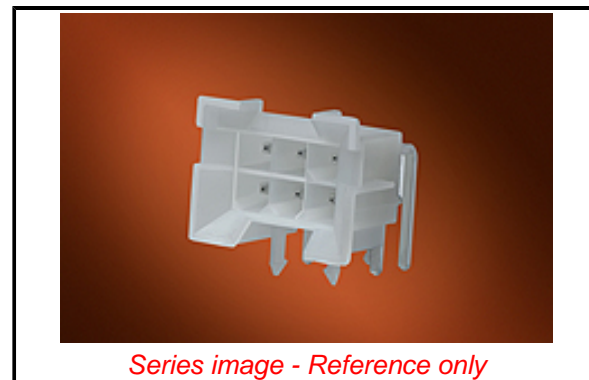

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/21/2016 (20 June 2016)

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS Green Image  
ELV Not Relevant  
RoHS Phthalates Not Contained

**Search Parts in this Series**

[42404](#) Series

**Mates With**

[15-06-0101](#) Mini-Fit® BMI Panel Mount Receptacle, [39-01-2105](#) Mini-Fit Jr.™ Receptacle, [15-24-7101](#) Mini-Fit® BMI Vertical Receptacle Header, [44475-1021](#) Mini-Fit® BMI Vertical Receptacle Header, [245135](#) Mini-Fit Jr.™ Cable Assembly

Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	13.0A
Voltage - Maximum	600V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240

**Material Info**

Engineering Number	A-42404-10B1
--------------------	--------------

**Reference - Drawing Numbers**

Product Specification	PS-45750-001-001, PS-5556-002-001, TS-42404-001-001, TS-5556-002-001
Sales Drawing	SDA-42404-****

This document was generated on 12/19/2016

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**