
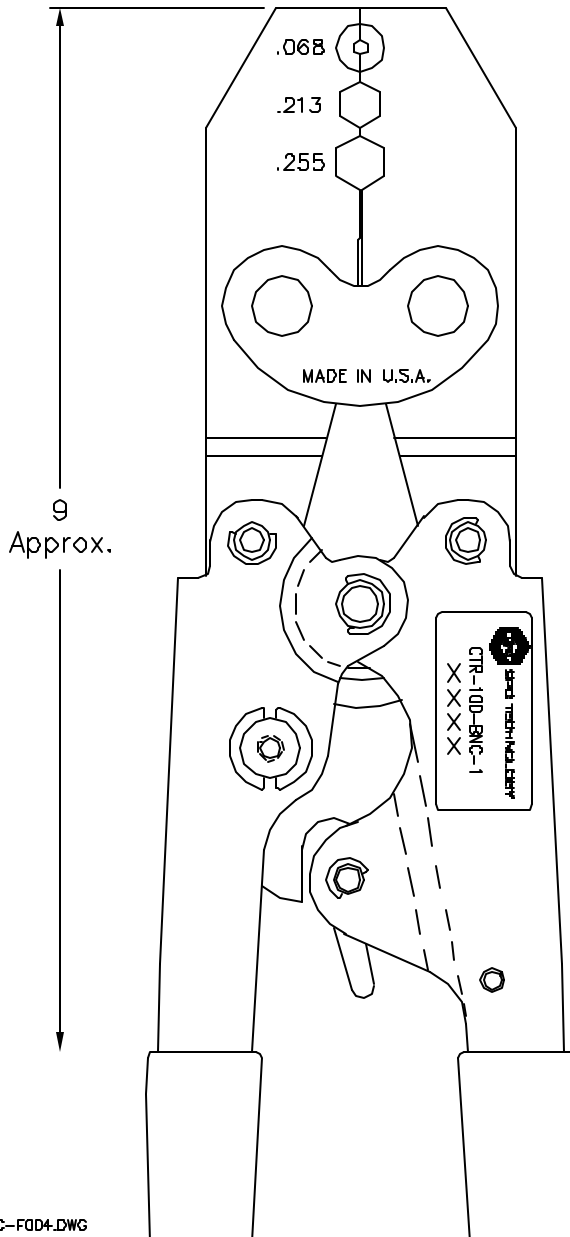


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
	A	RELEASED	Tom	8/12/85				
1322	B	Redrawn & Updated	JWM	3/21/02	JC	3/25/02	JC	3/25/02

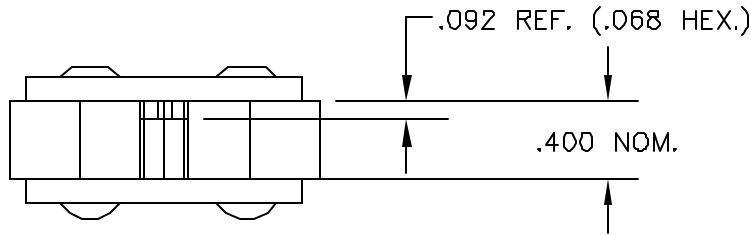

- Heat treated components
- Black oxide jaw assembly
- Black oxide handles
- Ratchet controlled release set to release when a 35-45 lb. load is applied approx. 1 3/4 inches from end of handles
- Blue textured Plastisol grips
- Crimps the center pin to a .068 hex, the RG-58 ferrule to a .213 hex, and the RG-59 ferrule to a .255 hex

SPC-F004-DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Tom	8/12/85
CHECKED BY:	DATE:
APPROVED BY:	DATE:

DRAWING TITLE:
Crimp tool, COAX Connector, RG-58 & RG-59

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	CTR-100-BNC-1	81N5435.dwg	B
SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1