


Film, Metallized Polypropylene, Power, C4C, 0.22 uF, 5%, 3,000 V, 750 V, 70C

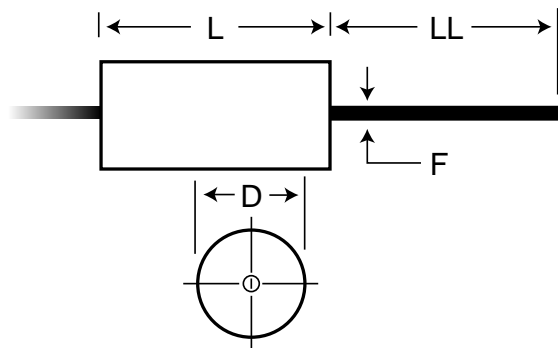

**Dimensions**

D	31mm NOM
L	58mm NOM
LL	40mm +/-5mm

**Packaging Specifications**

Packaging:	Bulk
Packaging Quantity:	30

**General Information**

Dielectric:	Metallized Polypropylene
Style:	Axial
Series:	C4C
RoHS:	Yes
Lead:	Wire Leads
Miscellaneous:	Polyester Tape & Resin Protection

**Specifications**

Capacitance:	0.22 uF
Capacitance Tolerance:	5%
Voltage DC:	3000 VDC
Voltage AC:	750 VAC
Temperature Range:	-40/+85C
Rated Temperature:	70C
Dissipation Factor:	0.05%
Max dVdt:	750 V
Resistance:	9.5 mOhms (100KHz)
Current:	12 Amps (100kHz 70C), 165 Amps (Peak)