

**Coil former**


Material: GFR 6-polyamide (UL 94 HB, insulation class to IEC 60085:  
B  $\triangleq$  max. operating temperature 130 °C), color code natural

Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s


Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 °C, 3,5 s

Winding: see page 159

Sections	$A_N$ mm <sup>2</sup>	$l_N$ mm	$A_R$ value $\mu\Omega$	Pins	Ordering code
1	177	87	17	10	B66242-J1000-R1

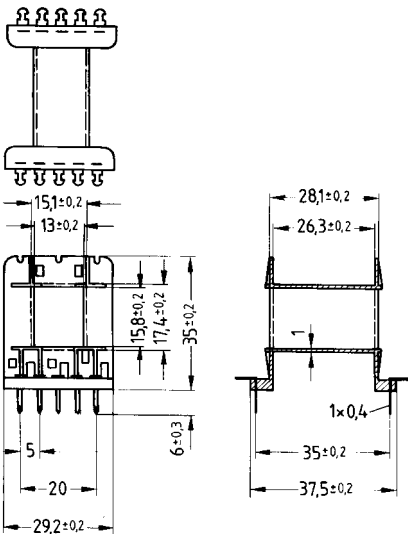

FEK0136-P



Hole arrangement  
View in mounting direction