



## DC axial fans

□ 140 x 51 mm

- **Material:** Housing: Die-cast aluminum  
Impeller: GRP<sup>1)</sup> (PA)
- **Direction of air flow:** Intake over struts
- **Direction of rotation:** Counterclockwise, looking towards rotor
- **Connection:** Via single wires AWG 20 and AWG 22, TR 64
- **Highlights:** 3-phase fan drive with very smooth operation  
Housing with grounding lug for screw M4 x 8 (Torx)
- **Weight:** 900 g

1) Fiberglass-reinforced plastic

- **Possible special versions:**  
(See chapter DC fans - specials)
  - Speed signal
  - Go / NoGo alarm
  - Alarm with speed limit
  - External temperature sensor
  - Internal temperature sensor
  - PWM control input
  - Analog control input
  - Multi-option control input
  - Moisture protection
  - Salt spray protection
  - Degree of protection: IP 54

Series 5300 TD


Nominal data		Air flow	Air flow	Nominal voltage	Voltage range	Sound pressure level	Sound power level	Sintec sleeve bearings	Ball bearings	Power consumption*	Nominal speed	Temperature range	Service life L <sub>10</sub> (40 °C) ebm-papst standard	Service life L <sub>10</sub> (T <sub>max</sub> ) ebm-papst standard	Life expectancy L <sub>10</sub> PC (40 °C) see page 17	Curve
Type	m <sup>3</sup> /h	cfm	VDC	VDC	dB(A)	Bel(A)	■ / ■	Watts	rpm <sup>-1</sup>	°C	Hours	Hours				
5312/2 TDHP	410	241	<b>12</b>	8...16	70	7.7	■	43	6 000	-20...+70	70 000 / 35 000	117 500	①			
5314/2 TDHP	410	241	<b>24</b>	16...36	70	7.7	■	42	6 000	-20...+70	70 000 / 35 000	117 500	①			
5314/2 TDHHP	490	288	<b>24</b>	16...36	75	8.1	■	67	7 000	-20...+70	62 500 / 30 000	105 000	②			
5318/2 TDHP	410	241	<b>48</b>	36...72	70	7.7	■	42	6 000	-20...+70	70 000 / 35 000	117 500	①			
5318/2 TDHHP	490	288	<b>48</b>	36...72	75	8.1	■	66	7 000	-20...+70	62 500 / 30 000	105 000	②			
5318/2 TDH4P	670	394	<b>48</b>	36...72	79	8.8	■	149	9 200	-20...+65	57 500 / 32 500	97 500	③			

Subject to change

Speed control range from 1000 rpm<sup>-1</sup> up to maximum nominal speed.

Standstill at 0% PWM, maximum speed if control cable is interrupted.

\* Power consumption at free air flow. These values can be significantly higher in the operating point.

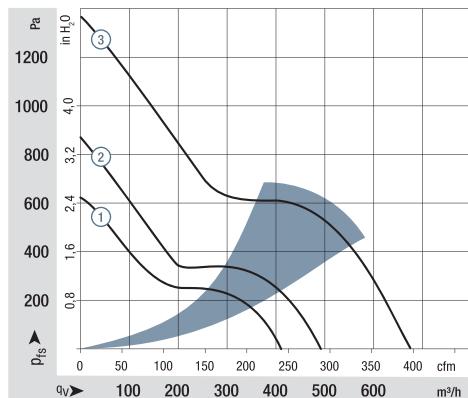

Air performance measured according to: ISO 5801.  
Installation category A, without contact protection.  
Noise: Total sound power level L<sub>WA</sub> ISO 103002  
measured on a hemisphere with a radius of 2 m.  
Sound pressure level L<sub>pA</sub> measured at 1 m distance  
from fan axis.  
The values given are applicable only under the specified  
measuring conditions and may differ depending on the  
installation conditions.  
In the event of deviation from the standard configuration,  
the parameters must be checked after installation!  
For detailed information see  
<http://www.ebmpapst.com/general conditions>

