

Safety relays - PSR-SCP-24-230UC/ESAM4/3X1/1X2 - 2981114

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e according to EN ISO 13849, single or two-channel operation, 3 enabling current paths, nominal input voltage of 24 ... 230 V AC/DC, plug-in screw terminal blocks

Why buy this product

- Up to Cat. 4/PL e according to ISO 13849-1, SILCL 3 according to IEC 62061, SIL 3 according to IEC 61508
- Single and two-channel control
- With inrush current reduction, therefore suitable for coupling to failsafe controllers (PSR-ESP4)
- With wide-range input (PSR-ESAM4/3X1)



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 051644
GTIN	4046356051644
Weight per Piece (excluding packing)	305.480 g
Custom tariff number	85371099
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	45 mm
Height	99 mm
Depth	114.5 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
---------------------------------	------------------

Safety relays - PSR-SCP-24-230UC/ESAM4/3X1/1X2 - 2981114

Technical data

Ambient conditions

Ambient temperature (storage/transport)	-25 °C ... 85 °C
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g
Maximum altitude	≤ 2000 m (Above sea level)

Input data

Input voltage range	24 V AC/DC ... 230 V AC/DC
Input voltage range in reference to U_N	0.85 ... 1.1
Typical input current at U_N	120 mA (at 24 V DC)
	20 mA (for 120 V AC)
	10 mA (for 230 V AC)
Voltage at input/start and feedback circuit	approx. 24 V DC
Typical response time	50 ms (manual start)
	60 ms (automatic start)
Typ. starting time with U_s	500 ms (when controlled via A1)
Typical release time	20 ms (when controlled via S11/S12 and S21/S22)
	50 ms (at 24 V DC)
	110 ms (for 120 V AC)
	280 ms (for 230 V AC)
Concurrence input 1/2	∞
Recovery time	1 s
Status display	2 x green LEDs
Maximum switching frequency	0.5 Hz
Max. permissible overall conductor resistance	11 Ω

Output data

Contact type	3 enabling current paths
	1 signaling current path
Contact material	AgSnO ₂ , + 0.2 μm Au
Minimum switching voltage	10 V AC/DC
Maximum switching voltage	250 V AC/DC
Limiting continuous current	6 A (N/O contact / N/C contact)
Inrush current, minimum	10 mA
Maximum inrush current	6 A
Sq. Total current	50 A ² ($I_{TH}^2 = I_1^2 + I_2^2 + \dots + I_N^2$)
Interrupting rating (ohmic load) max.	192 W (24 V DC, τ = 0 ms)
	384 W (48 V DC, τ = 0 ms)
	80 W (110 V DC, τ = 0 ms)
	66 W (220 V DC, τ = 0 ms)

Safety relays - PSR-SCP-24-230UC/ESAM4/3X1/1X2 - 2981114

Technical data

Output data

	2000 VA (250 V AC, $\tau = 0$ ms)
Maximum interrupting rating (inductive load)	48 W (24 V DC, $\tau = 40$ ms)
	48 W (48 V DC, $\tau = 40$ ms)
	48 W (110 V DC, $\tau = 40$ ms)
	48 W (220 V DC, $\tau = 40$ ms)
Switching capacity min.	360 mW
Output fuse	6 A gG NEOZED
	B6/C4A gL/gG automatic device

General

Relay type	Electromechanical relay with forcibly guided contacts in accordance with EN 50205
Mechanical service life	Approx. 10^7 cycles
Nominal operating mode	100% operating factor
Net weight	305.48 g
Mounting type	DIN rail mounting
Mounting position	any
Degree of protection	IP54
	IP20
Min. degree of protection of inst. location	IP54
Control	one and two channel
Housing color	yellow

Connection data

Connection method	Screw connection
pluggable	Yes
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Stripping length	7 mm
Screw thread	M3

Safety-related characteristic data

Stop category	0
Designation	IEC 61508 - High demand
Safety Integrity Level (SIL)	3
Designation	IEC 61508 - Low demand
Safety Integrity Level (SIL)	3
Designation	EN ISO 13849

Safety relays - PSR-SCP-24-230UC/ESAM4/3X1/1X2 - 2981114

Technical data

Safety-related characteristic data

Performance level (PL)	e
Category	4
Designation	EN 62061
Safety Integrity Level Claim Limit (SIL CL)	3

Standards and Regulations


Shock	15g
Designation	Air clearances and creepage distances between the power circuits
Standards/regulations	DIN EN 50178/VDE 0160
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	6 kV/safe isolation, reinforced insulation and 6 kV between input circuits and output contact current paths (13/14, 23/24, 33/34), as well as between output contact current paths (13/14, 23/24, 33/34).
Degree of pollution	2
Overvoltage category	III
Vibration (operation)	10 Hz ...150 Hz, 2g

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Circuit diagram

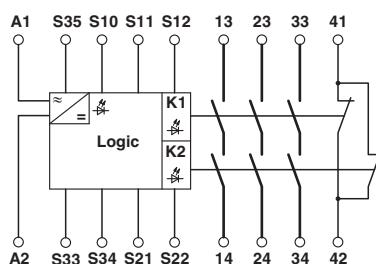

Safety relays - PSR-SCP-24-230UC/ESAM4/3X1/1X2 - 2981114

Circuit diagram

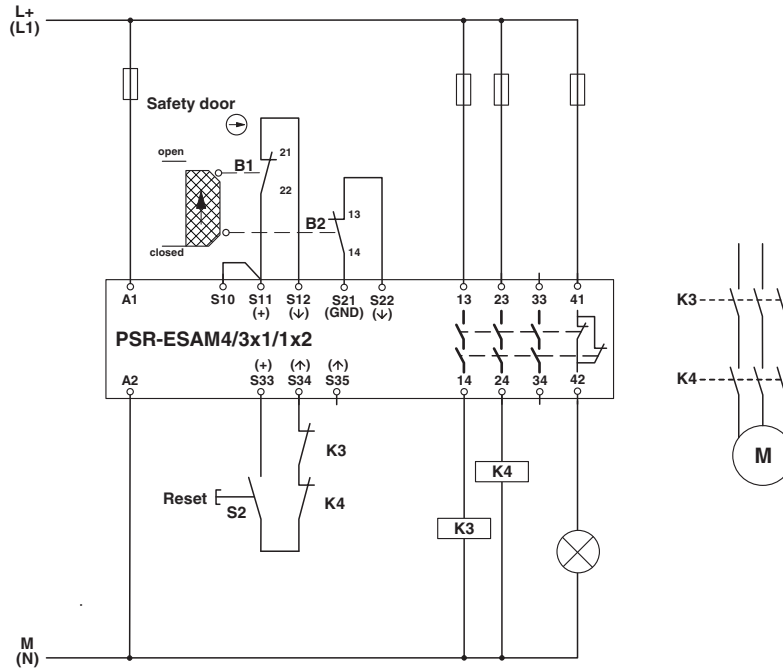

Two-channel safety door monitoring

Classifications

eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371901
eCl@ss 5.1	27371901
eCl@ss 6.0	27371819
eCl@ss 7.0	27371819
eCl@ss 8.0	27371819
eCl@ss 9.0	27371819

ETIM

ETIM 2.0	EC001449
ETIM 3.0	EC001449
ETIM 4.0	EC001449
ETIM 5.0	EC001449
ETIM 6.0	EC001449

UNSPSC

UNSPSC 6.01	30211901
UNSPSC 7.0901	39121501
UNSPSC 11	39121501

Safety relays - PSR-SCP-24-230UC/ESAM4/3X1/1X2 - 2981114

Classifications

UNSPSC

UNSPSC 12.01	39121501
UNSPSC 13.2	39121501

Approvals

Approvals

Approvals

UL Listed / cUL Listed / Functional Safety / EAC / EAC / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
-----------	--	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
------------	--	---	---------------

Functional Safety			01/205/0654/09
-------------------	--	--	----------------

EAC			EAC-Zulassung
-----	--	--	---------------

EAC			7500651.22.01.00244
-----	--	--	---------------------

cULus Listed			
--------------	--	--	--