


| Model Number:                                   | 53-1220 | 25.0   | Sinusoidal   | 2010-11-23 15.15.30  |
|---|---------|--|--|----------------------|
| *1.75"Titainium Dome Compression Tweeter Driver |         | Ohm  |  | Deg                  |
| *High Compliance Response:1.5K-20KHZ            |         | 20.0   |  | 108.0                |
| *30oz Magnet Structure                          |         |  |  |                      |
| *1.75"High Temperature Coil                     |         | 15.0   |  | 36.0                 |
| *SPL:100dB@1W/1M                                |         |  |  |                      |
| *400 Watts Rated Power                          |         | 10.0   |  | -36.0                |
|   |         | 5.0  |  | -108.0               |
|   |         | 10 20 50 100 200 500 1k 2k Hz 5k 10k 20k  CH A Ohm Resolution 1/6 Octave Unsmoothed Delay [ms] 0.000 Dist Rise [dB] 30.00  File: TD08-I.sini |  |                      |
|   |         | 4  | Sinusoidal   | 2010-11-23 15.14.49  |
|   |         | dBSPL 130.0  |  | CLIO 180.0  Deg      |
|   |         | 100.0  |  | 36.0                 |
|   |         | 700  |  | -108.0               |
|   |         |  | 200 500 1k 2k Hz<br>Dotave Unsmoothed Delay[ms]0.000 Dist Ri | -180.0<br>5k 10k 20k |
|   |         | File: TD08-SPL.sin   |  |                      |

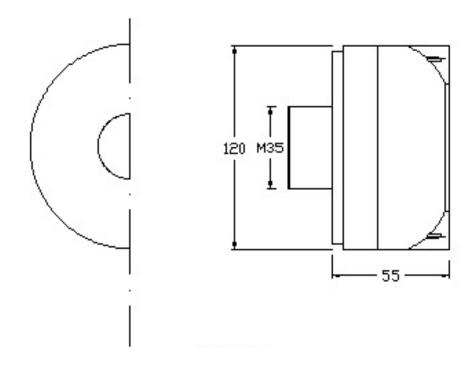

ALL DIMENSIONS ARE IN MILLIMETERS