



## Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	60 mm
Component name	XVC
Light source	Green LED steady Orange LED steady Red LED steady
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC

## Complementary

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover) STK (chromium-plated) (support tube)
Product mounting	On support tube, 22 mm
Cable cross section	0.33 mm <sup>2</sup>
AWG gauge	AWG 22
Cable length	600 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	75 mA
Flashing frequency	1 Hz
Product weight	0.78 kg
Height	508.3 mm



## Environment

Standards	EN/IEC 61000-6-2
-----------	------------------

EN/IEC 61000-6-3  
EN/IEC 61000-6-4

Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Class of protection against electric shock	Class I conforming to EN/IEC 61140
IP degree of protection	IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529

### Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0808 - Schneider Electric declaration of conformity  <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available  <a href="#">Product environmental</a>
Product end of life instructions	Need no specific recycling operations


### Contractual warranty

Warranty period	18 months
-----------------	-----------

## Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

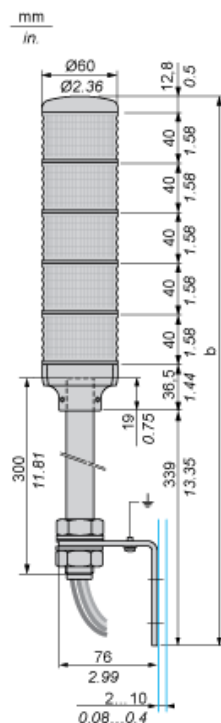

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	428.3	16.86
2 stages	468.3	18.44
3 stages	508.3	20.01
4 stages	548.3	20.01
5 stages	588.3	23.16

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

