



Main

Range of product	Harmony XB4
Product or component type	Head for illuminated double-headed push-button
Product compatibility	Integral LED
Device short name	ZB4
Bezel material	Black metal
Mounting diameter	22 mm
Sale per indivisible quantity	1
Shape of signaling unit head	Rectangular
Type of operator	Spring return
Operator profile	2 flush push-buttons - 1 central pilot light
Operators description	White "up arrow" - black "down arrow"

Complementary

CAD overall width	30 mm
CAD overall height	50 mm
CAD overall depth	30 mm
Product weight	0.056 kg
Resistance to high pressure washer	7000000 Pa at 55 °C, distance: 0.1 m
Colour of marking	White marking when green, red or black caps Black marking when white caps
Operator profile	Black flush, white down arrow White flush, black up arrow
Mechanical durability	1000000 cycles
Electrical composition code	M1 for <= 6 contacts using single blocks in front mounting with integral LED M2 for <= 6 contacts using single and double blocks in front mounting with integral LED M10 for <= 2 contacts using single blocks in front mounting with integral LED M6 for <= 2 contacts using single blocks in front mounting with integral LED and transformer

Environment


Protective treatment	TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-40...70 °C
Class of protection against electric shock	Class I conforming to IEC 61140
IP degree of protection	IP69 IP66 conforming to IEC 60529 IP67 conforming to IEC 60529 IP69K
NEMA degree of protection	NEMA 13 NEMA 4X
IK degree of protection	IK06 conforming to IEC 50102
Standards	EN/IEC 60947-5-5 UL 508 JIS C 4520 EN/IEC 60947-5-1 EN/IEC 60947-5-4 CSA C22.2 No 14 EN/IEC 60947-1
Product certifications	UL listed CSA BV RINA GL DNV LROS (Lloyds register of shipping)
Vibration resistance	5 gn (f = 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	(Duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 (Duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

Contractual warranty


Warranty period	18 months
-----------------	-----------

Dimensions

Without Boot



With Boot ZBA708




Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board	Connection by Faston Connectors
(1) Diameter on finished panel or support (2) 40 mm min. / 1.57 in. min. (3) 30 mm min. / 1.18 in. min. (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm ^{+0.4}₀ / 0.88 in. ^{+0.016}₀) (5) 45 mm min. / 1.78 in. min. (6) 32 mm min. / 1.26 in. min.	

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

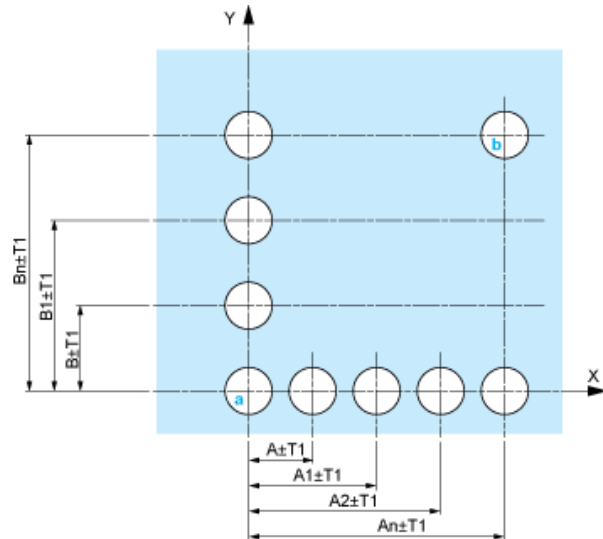

- A: 30 mm min. / 1.18 in. min.
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

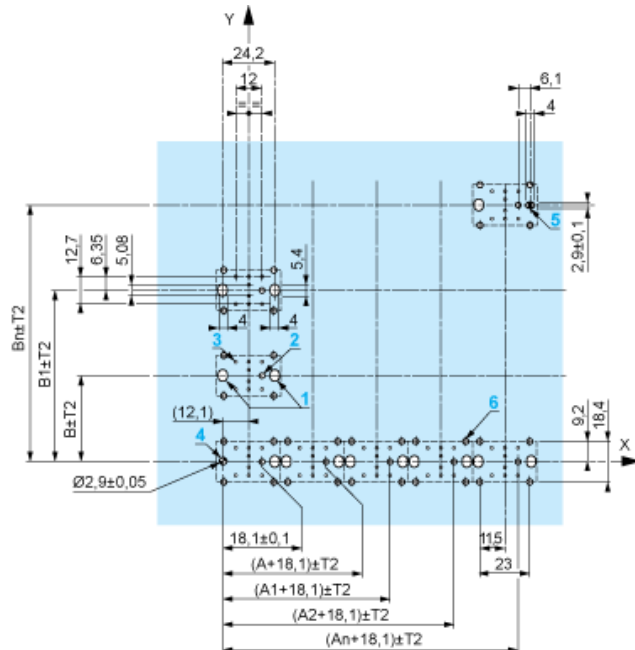

- A: 30 mm min.
B: 40 mm min.

The technical drawing shows a mechanical component with various dimensions and tolerances. The main body is a rectangular plate with a width of $B \pm T_2$ and a height of $B_{nt} \pm T_2$. The thickness is $\varnothing 0.12 \pm 0.002$. The drawing includes several holes and features labeled with numbers 1 through 6. Key dimensions include:

- Top Section:** A horizontal slot with a width of 0.95 and a depth of 0.47 . There are also smaller slots with widths of 0.24 and 0.16 .
- Left Side:** Vertical dimensions of 0.5 , 0.25 , and 0.2 define the positions of features.
- Right Side:** A vertical dimension of 0.15 ± 0.04 defines the position of a feature.
- Bottom Section:** Horizontal dimensions from the left edge include 0.16 , 0.22 , $(A+0.72) \pm T_2$, $(A1+0.72) \pm T_2$, $(A2+0.72) \pm T_2$, and $(An+0.72) \pm T_2$. Other bottom dimensions include 0.36 , 0.73 , 0.45 , and 0.91 .
- Other Features:** A circular hole with diameter $\varnothing 0.16$ is located near the top center. A feature labeled (0.48) is indicated on the left side. A small feature labeled 0.2 is shown at the bottom right corner.

B: 1.57 in. min.

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm $\pm$ 0.1 / 0.88 in. $\pm$ 0.004
- Orientation of body/fixing collar ZB4 BZ009: $\pm 2^{\circ}30'$ (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

Technical drawing of the ZBZ 006 tool assembly. The drawing shows a side view of the tool with various components labeled. Dimensions are provided in millimeters (mm) and inches (in.).

Dimensions (mm):

- 49.85 ± 0.3
- 1.963 ± 0.012
- 55.5
- 2.19

Dimensions (in.):

- 1.963
- 2.19

Part numbers and labels:

- ZB4 BD•
- (1)
- ZB4 BZ009
- ZB4 BZ079
- ZBE 70•/ZBV B•7
- ZBZ 01•
- (2)
- ZBZ 006

- 6

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole $\varnothing$ 2.4 mm $\pm$ 0.05 / 0.09 in. $\pm$ 0.002 for centring adapter ZBZ 01•
- 3 8 $\times$ $\varnothing$ 1.2 mm / 0.05 in. holes
- 4 1 hole $\varnothing$ 2.9 mm $\pm$ 0.05 / 0.11 in. $\pm$ 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes $\varnothing$ 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the $\varnothing$ 2.4 mm $\pm$ 0.05 / 0.09 in. $\pm$ 0.002 holes for centring adapter ZBZ 01•.

Electrical Composition Corresponding to Codes M1 and M7




Electrical Composition Corresponding to Codes M2 and M8



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



Legend

Single contact



Double contact



Light block



Possible location

