

3-phase high current filter



Description

- High power filter for rated currents up to 2500 A

Standards

- IEC 60939
- UL 1283

Approvals

- Approval Reference Type: FMCC SOL
- VDE Certificate Number: pending
- UL File Number: E72928

Applications

- High voltage rating 760 VAC for IT mains supply
- Especially designed for high power applications such as: Frequency Converters, UPS-Systems, Inverters for Photovoltaic Systems and Wind Energy
- Suitable for use in equipment according to IEC/UL 60950

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

Technical Data


Rated Current	150 - 2500A @ Ta 50 °C
Rated voltage	520/760 VAC, 50/60 Hz
Approval for	150 - 2500A @ Ta 50 °C / 520/760/520/760VAC; 50/60Hz
Overload Current	1.5 x Ir
Leakage Current	< 15mA (440V / 50Hz)
Dielectric Strength	520 VAC:
	2.15kVDC between L-L
	2.7kVDC between L-PE
	Test voltage 2 sec
Dielectric Strength	760VAC:
	3kVDC between L-L
	3.1kVDC between L-PE
Number of Filter Stages	3-stage
Weight	12 - 89kg
Material: Housing	Metal / Aluminium
Sealing Compound	UL 94V-0

Mounting	Screw-on mounting on chassis, from top
Terminal	Bolt and nut M10 for types up to 250 A and copper bars for types upwards of 320 A
Operating Temperature	-25 °C to 100 °C
Climatic Category	25/100/21 acc. to IEC 60068-1
Degree of Protection	IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
MTBF	> 200'000h acc. to MIL-HB-217 F

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


Dimension

Case 3A

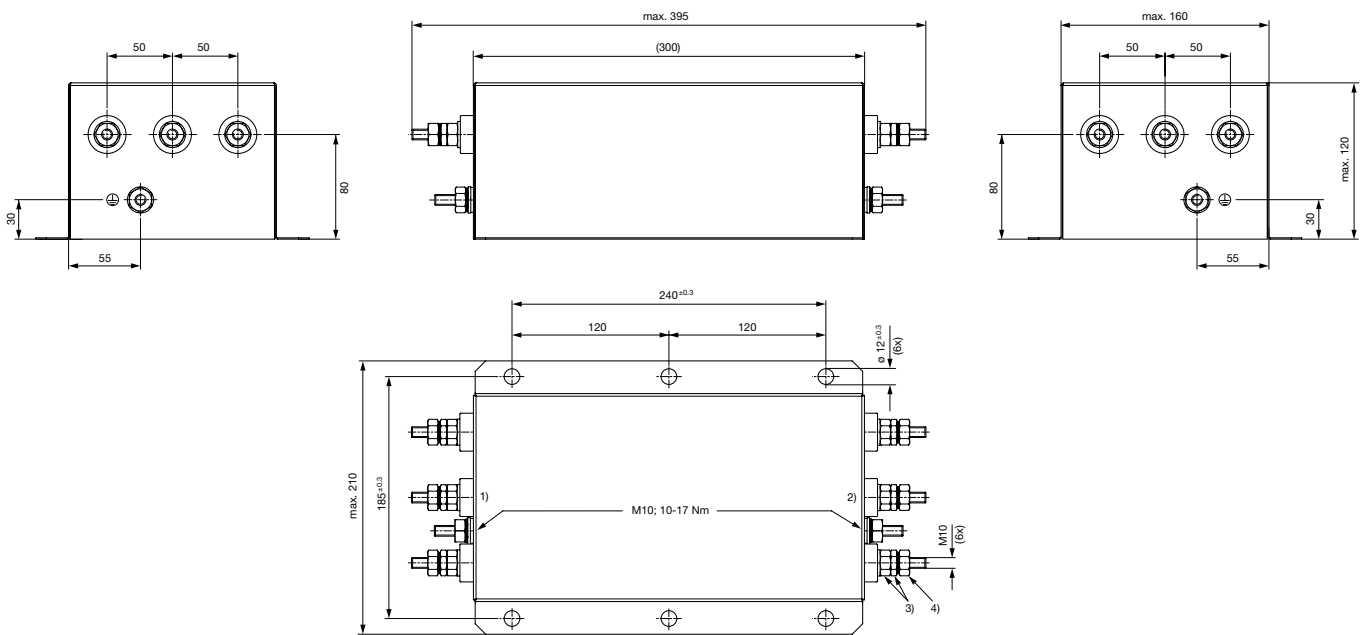


- 1) Line
- 2) Load
- 3) Lock-nut do not unscrew
- 4) Nut torque 10...17 Nm, keep lock-nut fastened

Case 3B

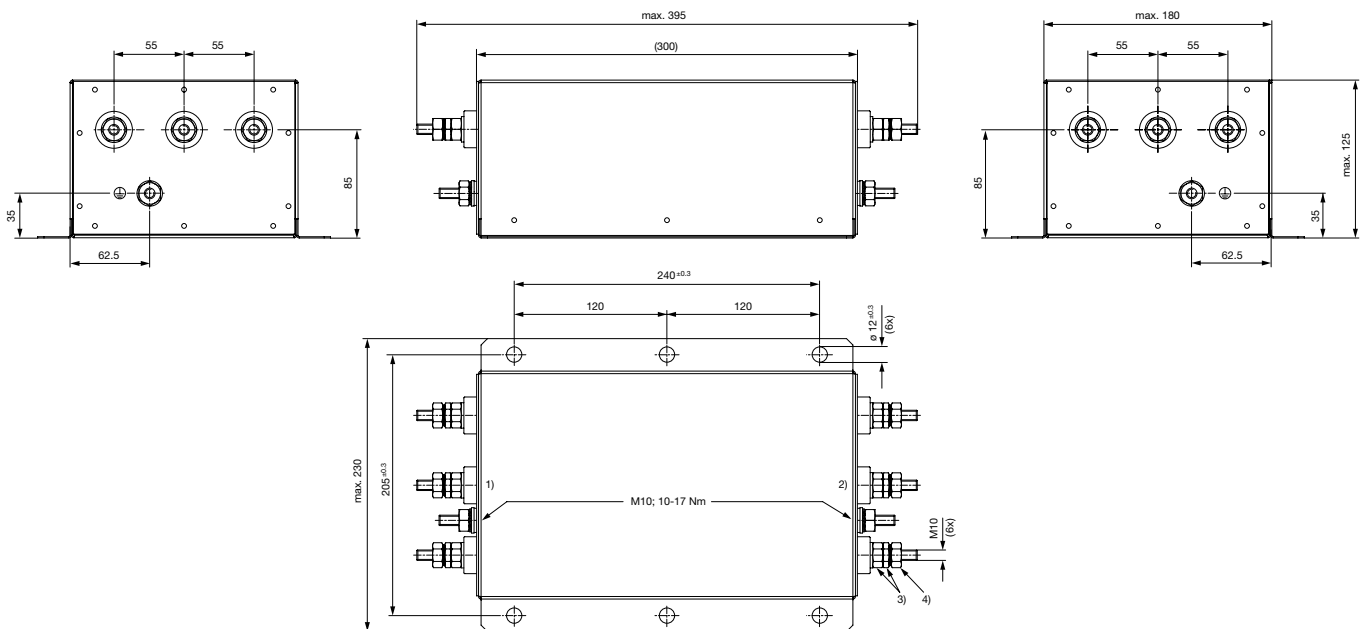


- 1) Line
- 2) Load
- 3) Lock-nut do not unscrew
- 4) Nut torque 10...17 Nm, keep lock-nut fastened

Case 3C

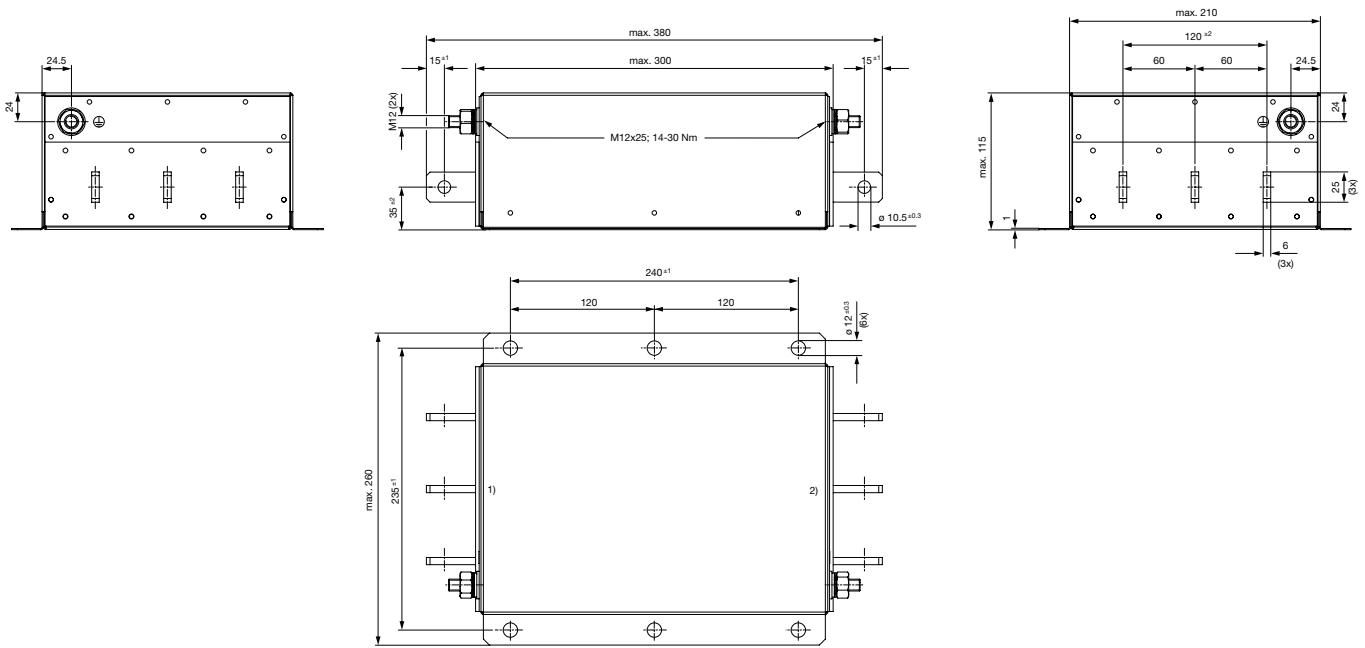


- 1) Line
 - 2) Load
- Case 3D

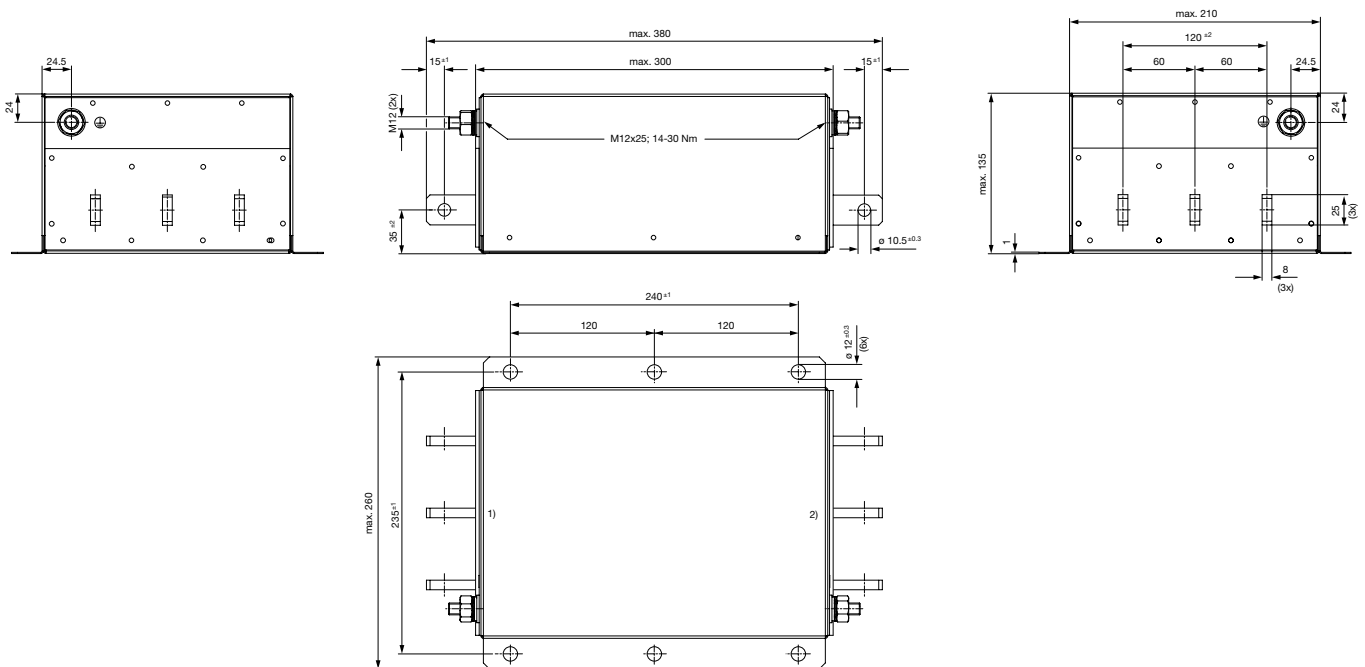


- 1) Line
- 2) Load

Case 3E

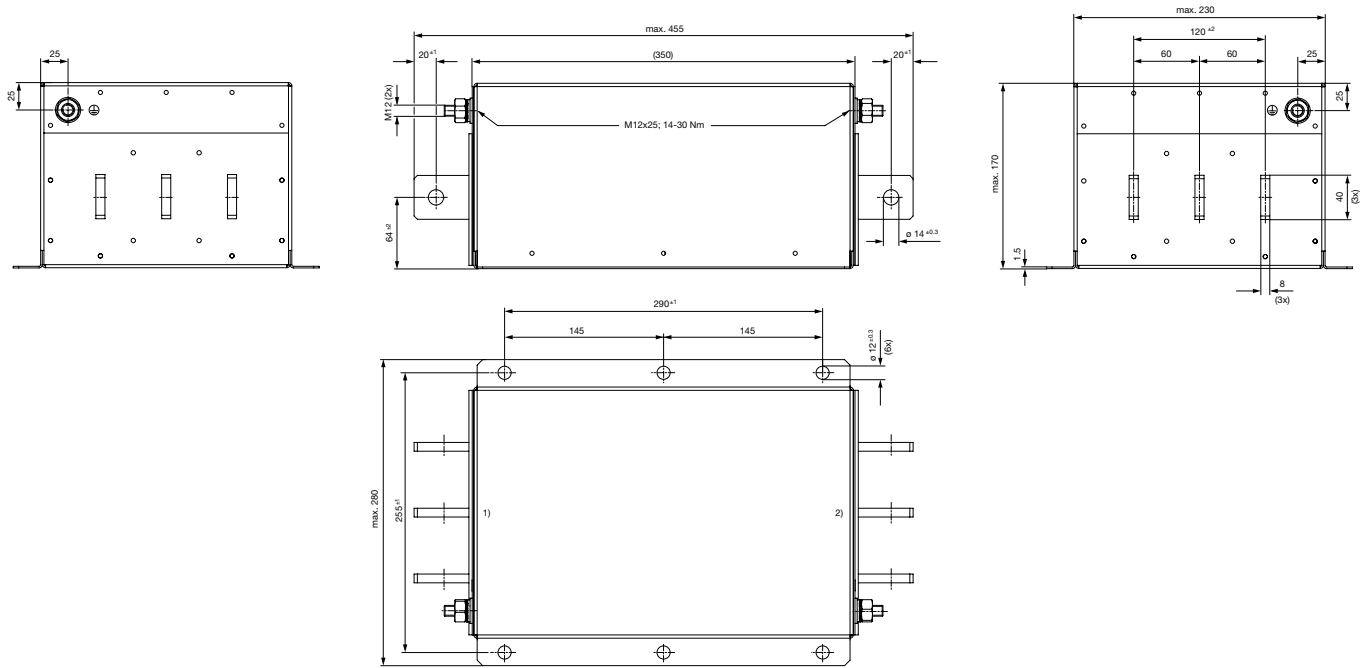


- 1) Line
- 2) Load

Case 3F

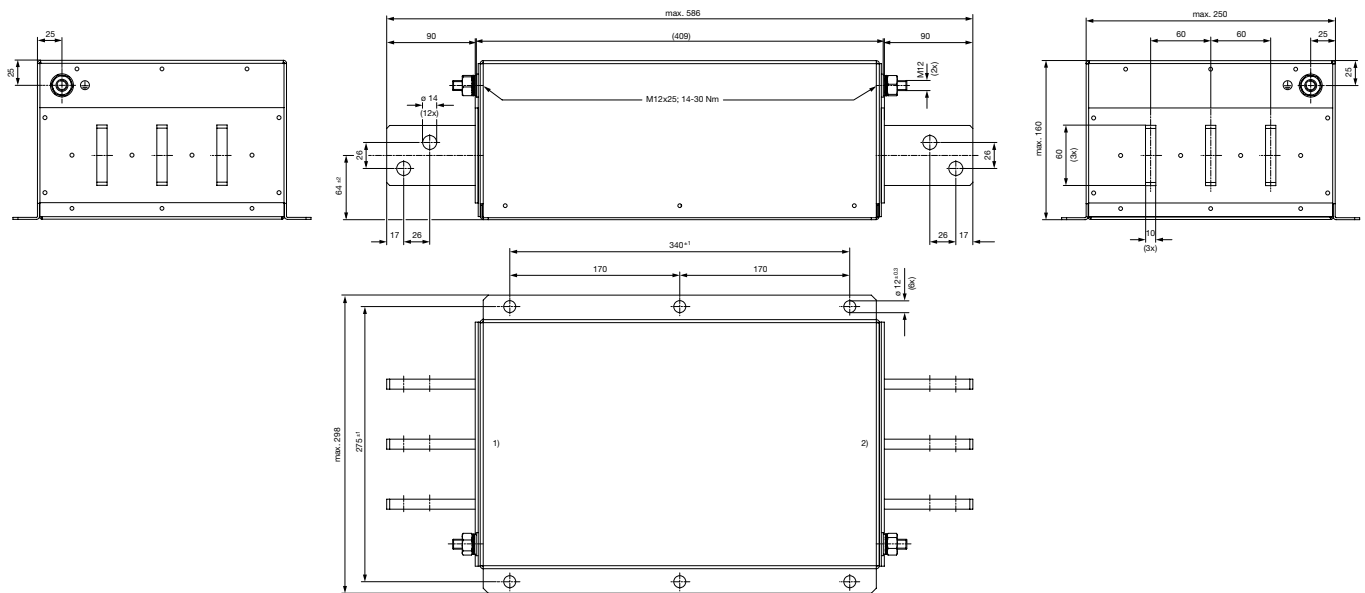


- 1) Line
- 2) Load

Case 3G

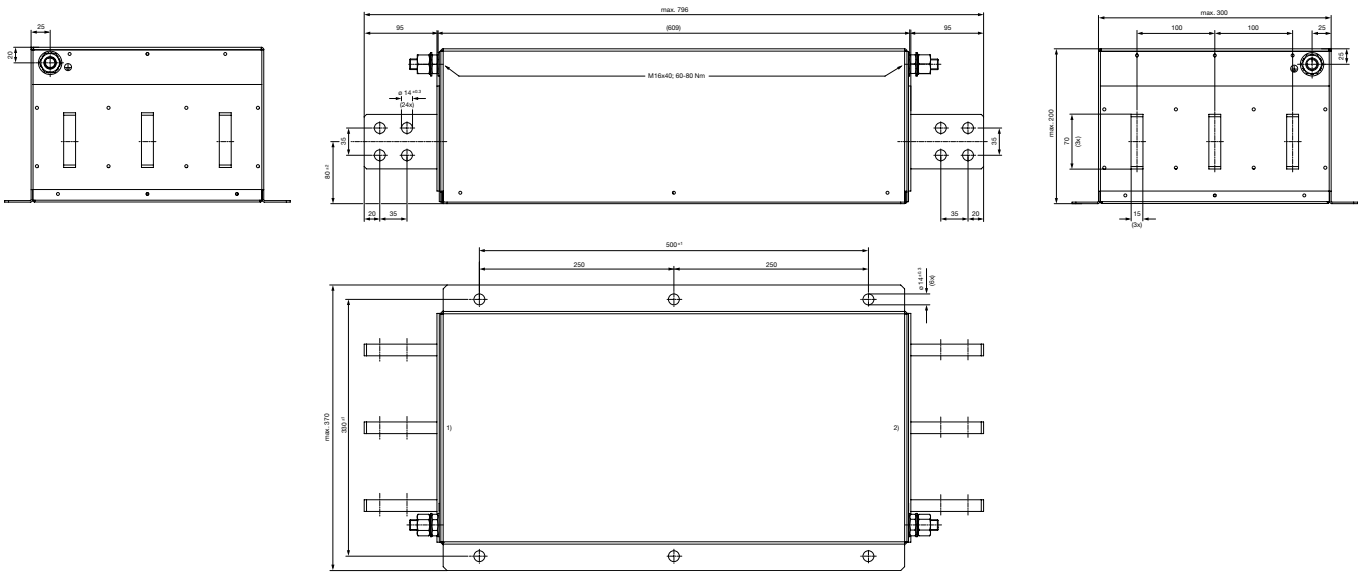

- 1) Line
- 2) Load


Diagrams

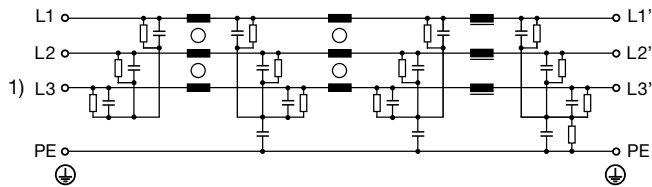


- 1) Line

Derating Curves

Permissible Working Current as a Function of Ambient Temperature

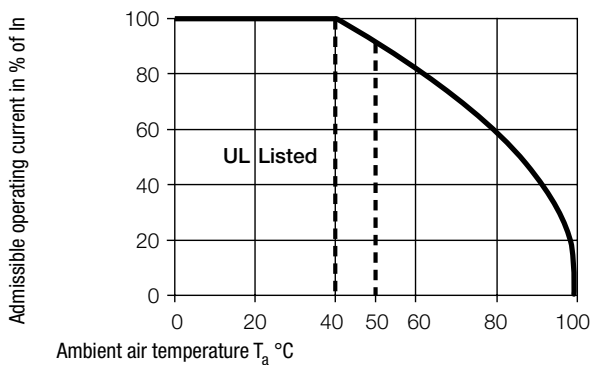

Attenuation Loss . . . 0.1/100Ω differential mode 100/0.1Ω differential mode - - - - 50Ω differential mode ____ 50Ω common mode
Standard version

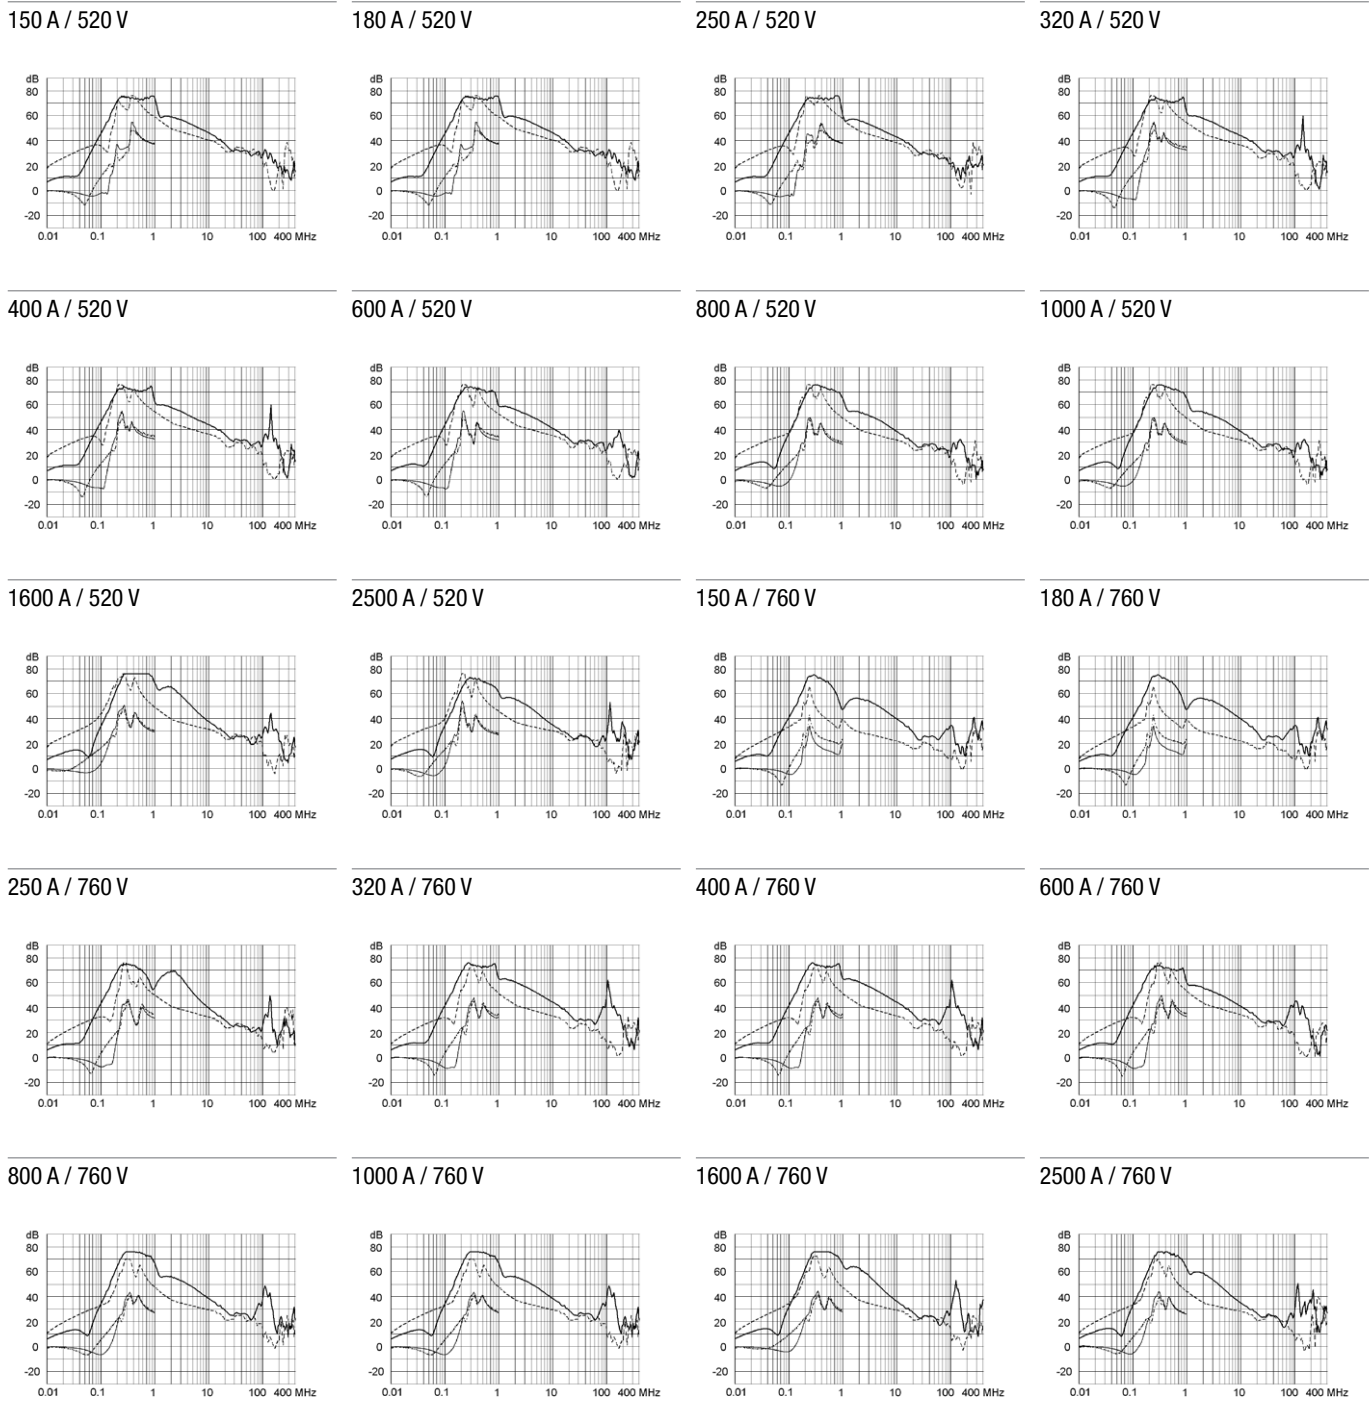

All Variants

Rated Current @ Ta 50°C (40°C) [A]	Rated Voltage [VAC]	Power (kW)	Leakage Current [mA] @ 440V, 60Hz ¹⁾	Power _{loss} [W]	Weight [kg]	Housings	Order Number
150 (164)	520	75	14.1	8	12 kg	3A	FMCC-H93A-J532
180 (197)	520	90	14.1	11	12 kg	3A	FMCC-H93A-J832
250 (250)	520	132	14.1	13	13.5 kg	3B	FMCC-H93B-K532
320 (350)	520	160	14.1	16	15.5 kg	3C	FMCC-H93C-L252
400 (438)	520	220	14.1	25	15.5 kg	3C	FMCC-H93C-M052
600 (657)	520	315	14.1	43	18 kg	3D	FMCC-H93D-U052
800 (876)	520	400	14.1	56	34 kg	3E	FMCC-H93E-Q052
1000 (1095)	520	560	14.1	88	34 kg	3E	FMCC-H93E-S052

Rated Current @ Ta 50°C (40°C) [A]	Rated Voltage [VAC]	Power (kW)	Leakage Current [mA] @ 440V, 60Hz ¹⁾	Power _{loss} [W]	Weight [kg]	Housings	Order Number
1600 (1600)	520	900	14.1	150	38 kg	3F	FMCC-H93F-S652
2500 (2500)	520	1320	14.1	286	89 kg	3G	FMCC-H93G-T552
150 (164)	760	110	13.5	8	12 kg	3A	FMCC-I93A-J534
180 (197)	760	132	13.5	11	12 kg	3A	FMCC-I93A-J834
250 (250)	760	200	13.5	13	13.5 kg	3B	FMCC-I93B-K534
320 (350)	760	250	13.5	16	15.5 kg	3C	FMCC-I93C-L254
400 (438)	760	315	13.5	25	15.5 kg	3C	FMCC-I93C-M054
600 (657)	760	500	13.5	43	18 kg	3D	FMCC-I93D-U054
800 (876)	760	630	13.5	56	34 kg	3E	FMCC-I93E-Q054
1000 (1095)	760	710	13.5	88	34 kg	3E	FMCC-I93E-S054
1600 (1600)	760	1320	13.5	150	38 kg	3F	FMCC-I93F-S654
2500 (2500)	760	2000	13.5	286	89 kg	3G	FMCC-I93G-T554

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) Nominal leakage current acc. to IEC60950 - 5.2.5. under normal operating conditions. Note: worst case leakage current acc. to IEC60950 - Annex G4 (situation with two interrupted lines) can be much higher.

Packaging unit 1 Pcs