


# DURACELL®

## Lithium/Manganese Dioxide Battery

# DL1/3N

# Li/MnO<sub>2</sub>

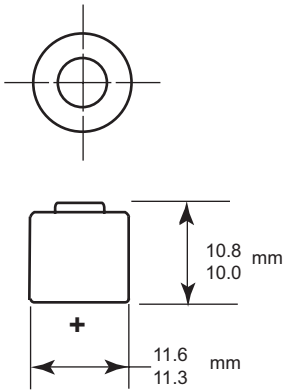


Dimensions shown are IEC/ANSI standards

Nominal Voltage:	3.0 V
Typical Voltage:	3.0-3.3 V
Nominal Internal Impedance:	250 m-ohm @ 1kHz
Average Weight:	3 gm
Volume:	1.1 cm <sup>3</sup>
Terminals:	Flat, cap and base
Operating Temperature Range:	-20°C to 60°C (-4°F to 140°F)
ANSI:	5008LC
IEC:	CR11108

# Preliminary

### DL1/3N Discharge Load vs Capacity to 2.0 volts

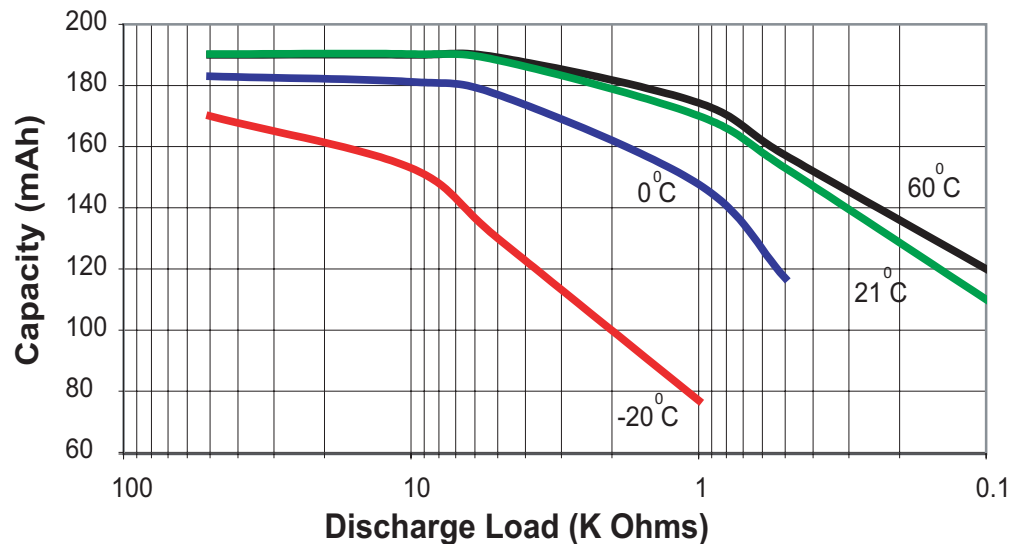

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.