

CE labs can support many areas of your audio and video distribution needs.

We manufacture:

- Digital Signage software and Media Players
- HD Matrix Switchers
- RF amplifiers
- HDMI and Component HD distribution amplifiers
- CAT 5 Signal Extenders
- VGA Extenders and Splitters
- and cables of all types.

See our full product line at www.celabs.net

WARRANTY

Cable Electronics, Inc. warrants this product to be free from defects in material and workmanship, under normal use and service, for a period of one year from the purchase by the original purchaser. If this product is defective or malfunctions, Cable Electronics will replace or repair this unit (at their option) within a reasonable time. No expressed or implied warranty is made for any defects caused by immersion or exposure to liquids, abuse, neglect, improper operation of unit, excess wear and tear and defects resulting from unauthorized disassembly and or modification.



3209 Wood Drive
Garland, TX 75041
Phone: (469) 429-9200
Toll free: (800) 767-6189
Fax: (469) 429-9205
www.celabs.net


Document: AV400_AV700_manual.pdf

930_5027_01_REV.B

INSTRUCTION MANUAL



AV400 & AV700 Audio/Video Distribution Amplifiers

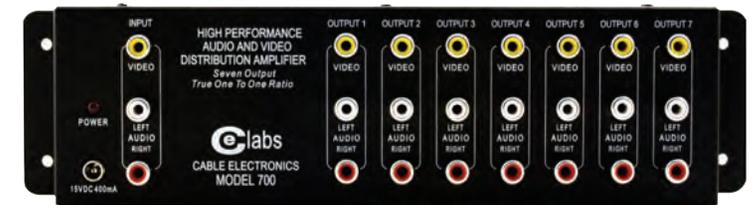

True one to one ratio

No signal loss

Daisy chain several units for larger displays with great picture quality

Heavy duty metal housing provides excellent shielding


Allows up to 150 ft. run

GENERAL INFORMATION

Both models are low noise, low distortion unity gain distribution amplifiers for line level stereo audio and video baseband signals.

Both models distribute a true one to one signal ratio. There is no loss of signal from original source to any output.

The model AV400 distributes audio/video to four TVs without loss. The AV700 distributes audio/video to seven TVs.

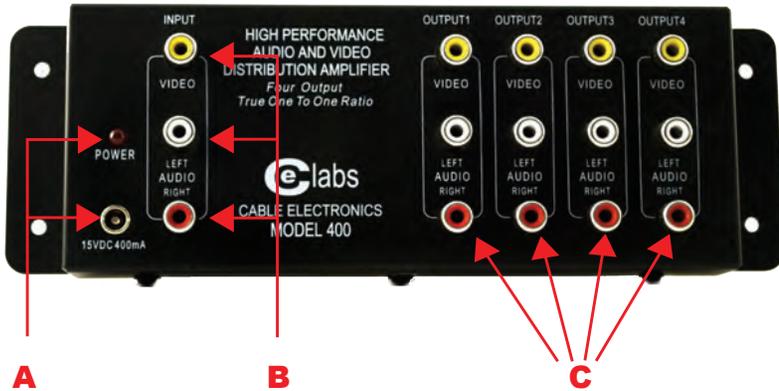

- A.** 15 Volt DC input jack and power indicator. LED lights up when power is applied.
- B.** Input Jacks: Connect to original source at corresponding output jacks. Connections are color coded (red to red, yellow to yellow and white to white).
- C.** Output Jacks: Connect to corresponding input jacks of TVs, VCRs, etc. Connections are color coded.


SAFETY INSTRUCTIONS

Location: Avoid locations with strong vibrations, direct sunlight or intense heat. Avoid Electrical Shock: Do not handle power cord with wet hands; do not expose to rain or other moisture. If liquid is spilled on unit, unplug and have unit serviced at authorized service center. To reduce the risk of electrical shock, do not remove cover. No user serviceable parts inside.

KEY INFORMATION

The AV400 and 700 units can be looped, cascaded or put in tandem as shown below without loss of audio/video signals. Audio/Video cables need to be top quality and can have runs of up to 100 feet between units and 150 feet between units and TVs.

Common Audio/video Sources: VCR, CD, Satellite receiver, etc.

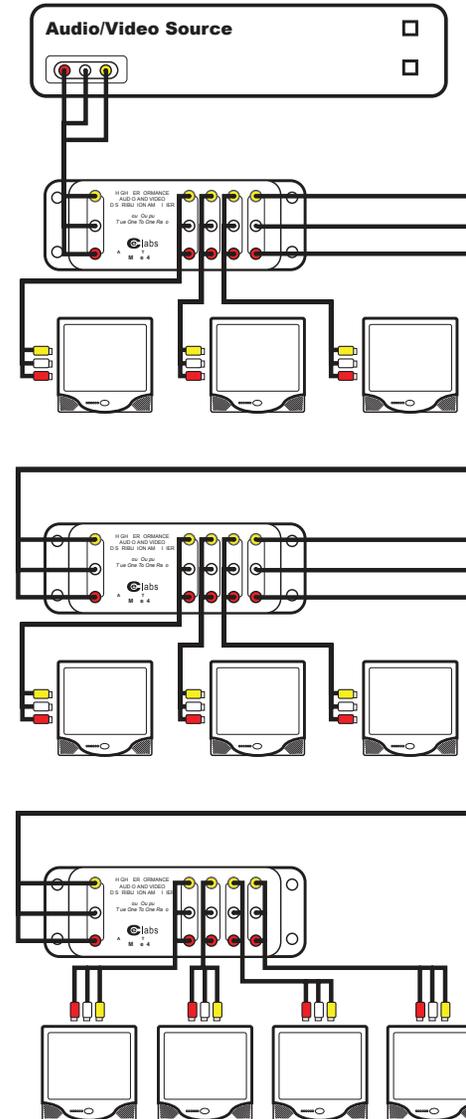

SPECIFICATIONS

VIDEO

Gain:
1 Volt, Unterminated 2 Volt

Input Impedance:
75 Ohms +5%

Video Response:
50 Hz to 10 MHz <0.4dB

Ch. to Ch. Isolation:
50 Hz to 10 Mhz 32 dB

Out to In Isolation:
50 Hz to 10 MHz 60 dB

Return Loss:
50 Hz to 10 MHz 20 dB

AUDIO

Gain:
Unity

Input Impedance:
22 K Ohm

Output Impedance:
100 Ohm

THD:
0.05% at 1.0 Volts input level

Frequency Response:
10 to 50 KHz + 1 dB

Channel Separation:
> 75 dB @ 1 KHz

Out to In Isolation:
60 dB

Signal to Noise:
100 dB (re: 2 Volts out)