


## DS-2CE15C2N-VFIR3


## PICADIS 720 TVL Vari-focal IR Bullet Camera

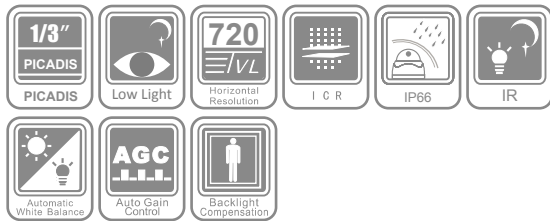

### Key features

- 1/3" PICADIS
- True Day/Night
- 720 TVL Horizontal Resolution
- 2.8 - 12 mm /F1.4 Vari-focal Lens
- up to 130ft IR Distance
- Wide Operating Temperature Range: -40°C to 60°C(-40°F to +140°F)

### Dimensions

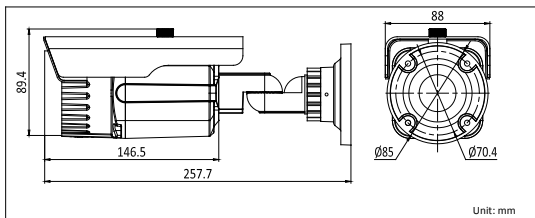

### Specifications

DS-2CE15C2N-VFIR3	
<b>Camera</b>	
Image Sensor	1/3" PICADIS
Signal System	NTSC
Effective Pixels	1280(H)×960(V)
Min. Illumination	0.14Lux @ (F1.4,AGC ON),0 Lux with IR
Shutter speed	NTSC: 1/30 s to 1/15,000 s
Lens	2.8-12 mm @ F1.4 Angle of view: 92° - 27.2°
Lens Mount	φ14
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
BLC	On
<b>General</b>	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 4 W(Max. 6.5 W with IR cut filter on)
Ingress Protection level	IP66
IR Range	Approx.100 to 130 ft
Dimensions	88 × 89.4 × 257.7mm(φ 3.46" x 3.52" x 10.15")
Weight	1350g (2.97 lbs)

### Available models

DS-2CE15C2N-VFIR3