



Evaluation Kit Based on i.MX RT1050 Crossover Processors

The i.MX RT1050 EVK is an entry-level development platform featuring the i.MX RT1050 crossover processor in a small, low-cost package.

The i.MX RT1050 EVK is a 4-layer through-hole USB-powered PCB. At its heart lies the i.MX RT1050 crossover processor, featuring NXP's advanced implementation of the Arm® Cortex®-M7 core. This core operates at speeds up to 600 MHz to provide high CPU performance and best real-time response.

KEY FEATURES


- ▶ 512 KB on-chip RAM which can be flexibly configured as TCM
- ▶ Various memory interfaces, including SDRAM, Raw NAND Flash, NOR Flash, SD/eMMC, QuadSPI
- ▶ Rich multimedia, including LCD display, parallel camera, 2D graphics acceleration, camera interface, SPDIF and multiple I²S audio interfaces
- ▶ A wide range of interfaces to support both wired (Ethernet, USB, CAN, etc.) and wireless standards such as Wi-Fi®, Bluetooth®, BLE, ZigBee® and Thread™
- ▶ Abundant peripherals: 2x HS USB OTG, 2x SDIO, 2x CAN, 1x 10/100 ENET with 1588, 8x UART, 4x SPI, 4x I²C, 4x Flex PWM, 4x Quad Timer, 4x ENC, 4x PIT, 2x GPT, 2x 12-bit ADC, 4x analog comparators
- ▶ Advanced power management module with DC-DC and LDO that reduces the complexity of an external power supply and simplifies power sequencing

TARGET APPLICATIONS

- ▶ Audio Subsystem—professional microphone, guitar pedals
- ▶ Consumer Products—Smart appliances, cameras, LCDs
- ▶ Home and Building Automation—HVAC climate control, security, lighting control panels, IoT gateways
- ▶ Industrial Computing Designs—EBS, PLCs, factory automation, test and measurement, M2M, HMI control assembly line robotics
- ▶ Motor Control and Power Conversion—3D printers, thermal printers, unmanned autonomous vehicles, robotic vacuum cleaners



i.MX RT1050 EVK

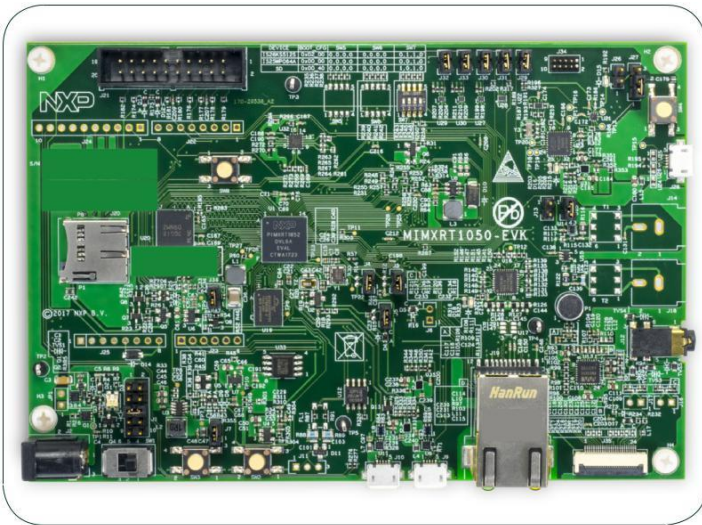

i.MX RT1050 LCD



ORDERING INFORMATION

Part Number: MIMXRT1050-EVK

Display (4.3"): RK043FN02H-CT

MIMXRT1050-EVK FEATURES

CPU Board	
Processor	<ul style="list-style-type: none">• MIMXRT1052DVL6A processor• 600 MHz Arm® Cortex®-M7 core
Memory	<ul style="list-style-type: none">• 256 Mb SDRAM memory• 512 Mb Hyper Flash• Footprint for QSPI Flash• TF socket for SD card
Display	<ul style="list-style-type: none">• Parallel LCD connector• Camera connector
Audio	<ul style="list-style-type: none">• Audio codec• 4-pole audio headphone jack• External speaker connection• Microphone• SPDIF connector
Connectivity	<ul style="list-style-type: none">• Micro USB host connector• Micro USB OTG connector• Ethernet (10/100T) connector• CAN transceivers• Arduino® interface
Debug	<ul style="list-style-type: none">• JTAG connector• Onboard DAP-link debugger
Sensor	<ul style="list-style-type: none">• 6-axis eCompass (3-axis magnetometer, 3-axis accelerometer) sensor FXOS8700CQ

SOFTWARE AND TOOLS

Customers can simplify product design with MCU-like usability and leverage current toolchains, including MCUXpresso, IAR, and Keil. The i.MX RT processor allows for rapid and easy prototyping and development with MCUXpresso SDK with FreeRTOS, Arm® Mbed™ and the global Arm ecosystem. Additionally, customers can expand their low-cost EVK with compatible Arduino hardware shields.

www.nxp.com/iMXRT1050EVK and imxcommunity.org

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. Arm, Cortex and Keil are registered trademarks of Arm Limited (or its subsidiaries) in the EU and/ or elsewhere. Mbed is a trademark of Arm Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. © 2017 NXP B.V.