

Electronic Identification Code

How to read-out the serial number of SHT2x

The SHT2x provides a device specific serial number which can be read-out via the serial interface (I²C) and allows for an unambiguous identification of each individual device. This application note describes the procedure for read-out of the serial number.

1 Communication Sequence

The communication sequences for reading out the serial number comply with the general I²C serial interface protocol. For detailed information on I²C, please refer to the Datasheet SHT2x and the I²C bus specification by NXP Semiconductors (<http://www.standardics.nxp.com/support/i2c/>).

The serial number of the SHT2x is partitioned to two different locations on the on-chip memory. Therefore, two memory access sequences are required to retrieve the complete serial number information. Figure 1 shows the corresponding communication sequence.

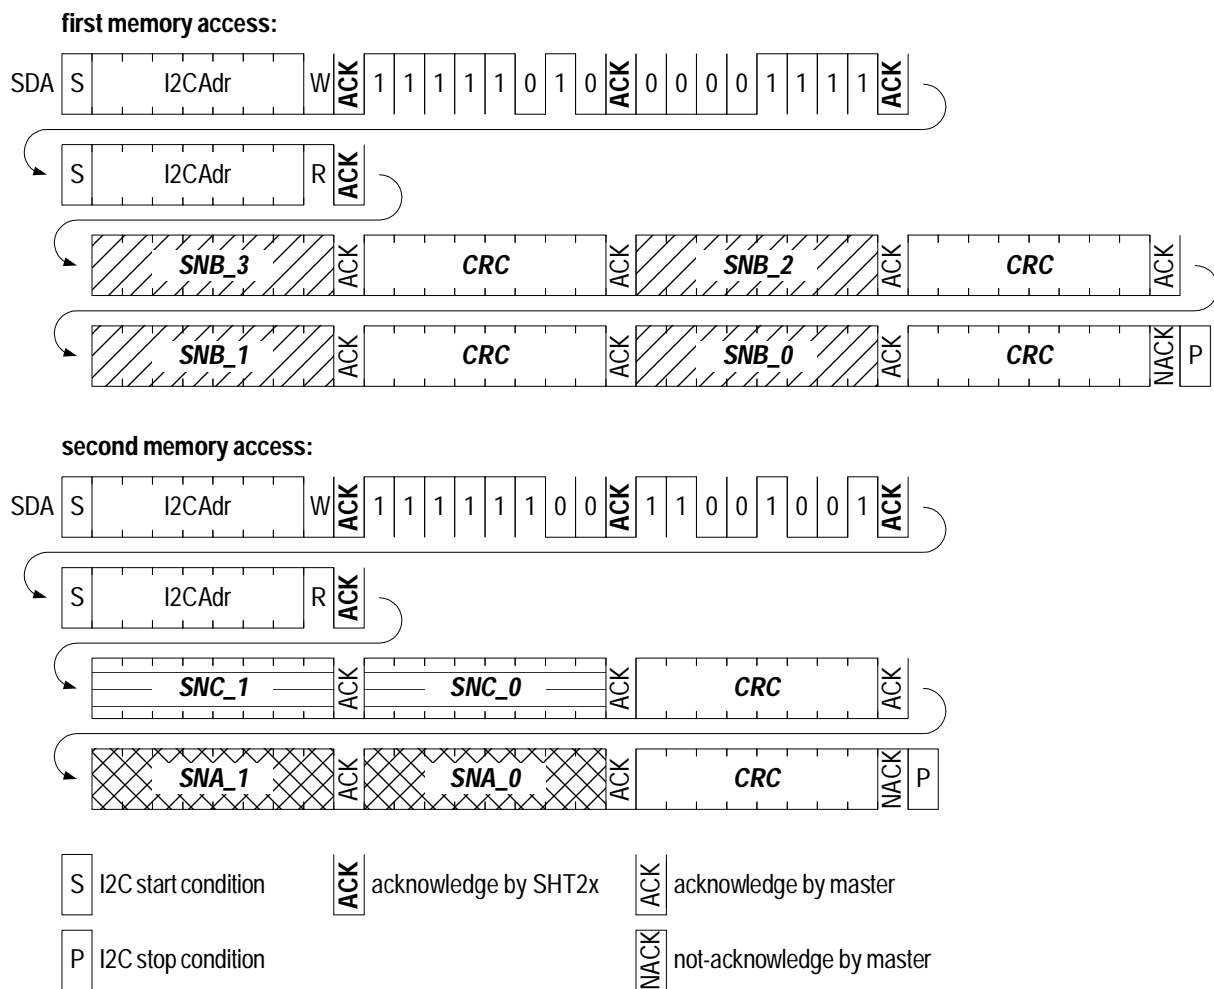


Figure 1: Communication sequences.

2 Composition of Serial Number

After reading out the data as described above, the serial number is obtained by arranging the data bytes according to Fig. 2.

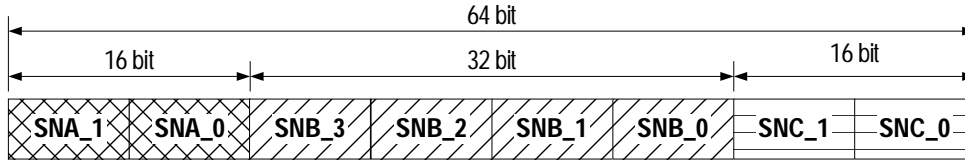


Figure 2: Composition of serial number.

3 Example

For illustration of the read-out procedure, a numeric example is presented below. The I²C address of the SHT2x is assumed as "100'0000" (hexadecimal: 0x40).

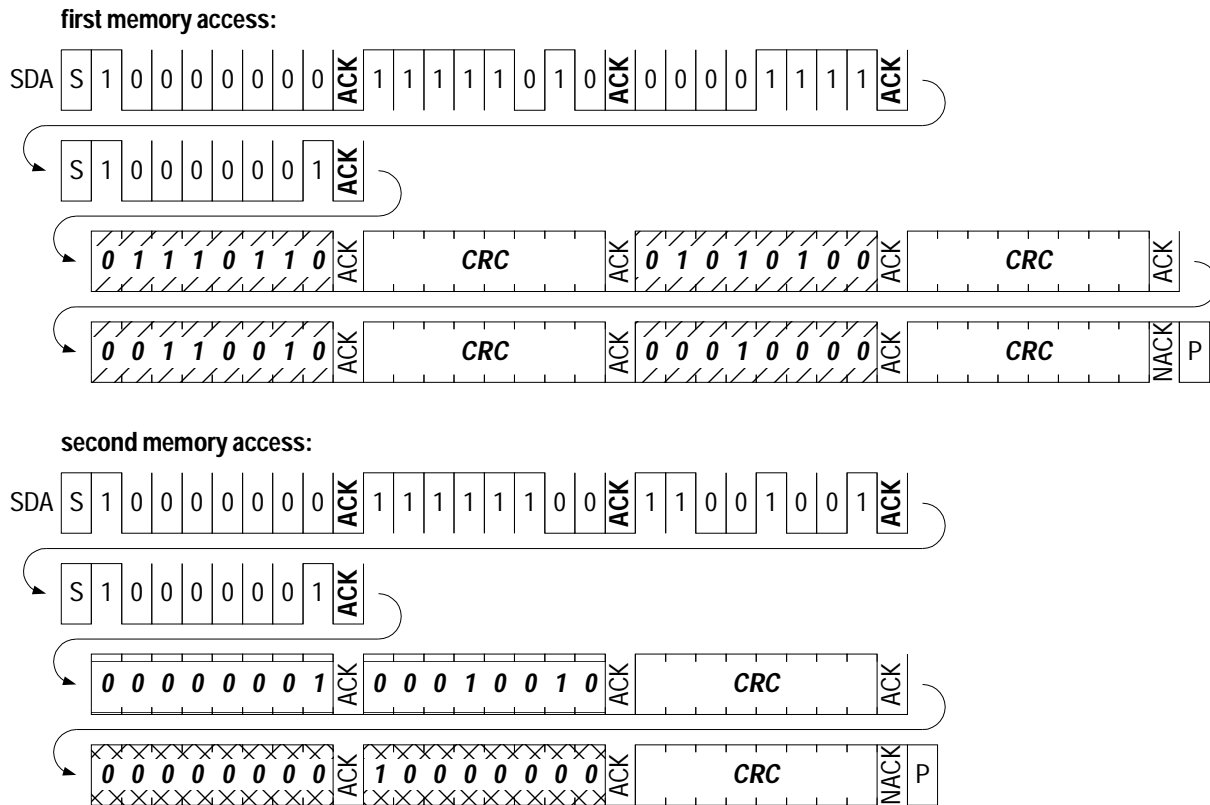


Figure 3: Communication sequences with numeric example (I²C address "100'0000"). Normal font: data direction master to SHT2x, bold-italic font: data direction SHT2x to master.

The serial number of the numeric example reads (hexadecimal): 0x0080'7654'3210'0112.

Revision History

Date	Revision	Changes
21 September 2009	1.0	Initial version (PME/DHA)
27 October 2009	1.1	Added NACK at the end of each read-out sequence (PME/DHA)

Copyright© 2009, SENSIRION.
 CMOSens® is a trademark of Sensirion
 All rights reserved

Headquarter and Sales Offices

Headquarter

SENSIRION AG
 Laubisruetistr. 50
 CH-8712 Staefa ZH
 Switzerland

Phone: +41 44 306 40 00
 Fax: +41 44 306 40 30
info@sensirion.com
<http://www.sensirion.com/>

Sales Office USA:

SENSIRION Inc.
 2801 Townsgate Rd., Suite 204
 Westlake Village, CA 91361
 USA

Phone: +1 805 409 4900
 Fax: +1 805 435 0467
michael.karst@sensirion.com
<http://www.sensirion.com/>

Sales Office Japan:

SENSIRION JAPAN Co. Ltd.
 Postal Code: 108-0074
 Shinagawa Station Bldg. 7F,
 4-23-5, Takanawa, Minato-ku
 Tokyo, Japan

Phone: +81 3 3444 4940
 Fax: +81 3 3444 4939
info@sensirion.co.jp
<http://www.sensirion.co.jp>

Sales Office Korea:

SENSIRION KOREA Co. Ltd.
 #1414, Anyang Construction Tower B/D,
 1112-1, Bisan-dong, Anyang-city
 Gyeonggi-Province
 South Korea

Phone: +82 31 440 9925-27
 Fax: +82 31 440 9927
info@sensirion.co.kr
<http://www.sensirion.co.kr>

Sales Office China:

Sensirion China Co. Ltd.
 Room 2411, Main Tower
 Jin Zhong Huan Business Building,
 Futian District, Shenzhen,
 Postal Code 518048
 PR China

phone: +86 755 8252 1501
 fax: +86 755 8252 1580
info@sensirion.com.cn
www.sensirion.com.cn

Find your local representative at: <http://www.sensirion.com/re>