

AVD75B-48S3V3

75 Watts

Sixteenth-brick Converter


Total Power: 75 Watts
Input Voltage: 36 to 75 Vdc
of Outputs: Single

Special Features

- Delivering up to 23A output
- Ultra-high efficiency 92.5% typ. at 13.8A load
- Wide input range: 36V ~ 75V
- Excellent thermal performance
- No minimum load requirement
- Basic isolation
- High power density
- Low output noise
- RoHS 6 compliant
- Startup Pre-bias
- Remote control function
- Remote output sense
- Trim function: 80% ~ 110%
- Input under voltage lockout
- Output over current protection
- Output short protection
- Output over voltage protection
- Over temperature protection
- Industry standard sixteenth-brick pin-out outline
- SMT or through-hole option

Safety

IEC/EN/UL/CSA 60950
CE Mark
UL/TUV
Materials meet UL94, V-0
flammability rating
EN55032 Class A with external
filter

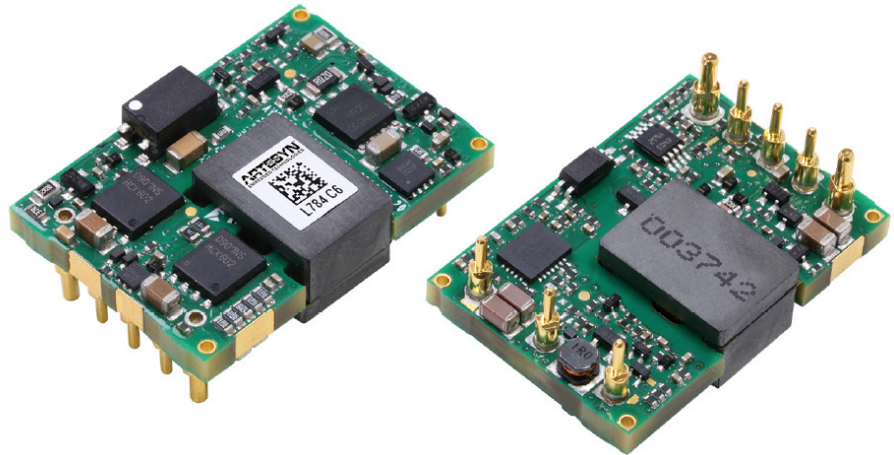

Product Descriptions

The AVD75B-48S3V3 is a single output DC/DC converter with standard sixteenth-brick outline and pin configuration. It delivers up to 23A output current with 3.3V output voltage. Above 92.5% ultra-high efficiency and excellent thermal performance make it an ideal choice to supply power in telecom and datacom.

Applications

Telecom/ Datacom

Model Numbers

Standard	Output Voltage	Structure	Remote ON/OFF logic	RoHS Status
AVD75B-48S3V3B-6L	3.3Vdc	Baseplate	Negative	R6
AVD75B-48S3V3-6L	3.3Vdc	Open-frame	Negative	R6
AVD75B-48S3V3TL	3.3Vdc	Open-frame	Negative	R6

Ordering information

AVD75B	-	48	S	3V3	P	B	-	6	L
①		②	③	④	⑤	⑥		⑦	⑧

①	Model series	AVD: high efficiency sixteenth brick series, 75: output power 75W
②	Input voltage	48: 36V ~ 75V input range, rated input voltage 48V
③	Output number	S: single output
④	Rated output voltage	3V3: 3.3V output
⑤	Remote ON/OFF logic	Default: negative logic; P: positive logic
⑥	Baseplate	B: with baseplate; default: open frame
⑦	Pin length	6: 3.8mm ± 0.25mm pin length; T: SMT Pin
⑧	RoHS status	Y: Rohs, R5; L: RoHS, R6

Options

None

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage	All	$V_{IN,DC}$	-	-	80	Vdc
Operating -Continuous	All		-	-	100	Vdc
Non-operating -100mS						
Maximum Output Power	All	$P_{O,max}$	-	-	50	W
Ambient Operating Temperature	All	T_A	-40	-	+85	°C
Storage Temperature	All	T_{STG}	-55	-	+125	°C
Isolation Voltage ¹						
Input to output	All		-	-	1500	Vdc
Voltage at remote ON/OFF pin	All		-0.3	-	12	Vdc
Humidity (non-condensing)						
Operating	All		-	-	95	%
Non-operating	All		-	-	95	%

Note 1 - 1mA for 60s, slew rate of 1500V/10s. Basic insulation, pollution degree 2.

Input Specifications

Table 2. Input Specifications:

Parameter	Conditions ¹	Symbol	Min	Typ	Max	Unit
Operating Input Voltage, DC	All	$V_{IN,DC}$	36	48	75	Vdc
Turn-on Voltage Threshold	$I_O = I_{O,max}$	$V_{IN,ON}$	31	-	36	Vdc
Turn-off Voltage Threshold	$I_O = I_{O,max}$	$V_{IN,OFF}$	30	-	35	Vdc
Lockout Voltage Hysteresis	$I_O = I_{O,max}$		1	-	3	V
Maximum Input Current ($I_O = I_{O,max}$)	$V_{IN,DC} = 36Vdc$	$I_{IN,max}$	-	-	3	A
Input Reflected Ripple Current	Through 12uH inductor	$I_{IN,typ}$	-	20	-	mA
Recommended Input Fuse	Fast blow external fuse recommended		-	-	5	A
Recommended External Input Capacitance	Low ESR capacitor recommended	C_{IN}	100	-	-	uF
Operating Efficiency	$T_A = 25\text{ }^{\circ}C$ $I_O = 60\%I_{O,max}$	η	-	92.5	-	%
	$T_A = 25\text{ }^{\circ}C$ $I_O = I_{O,max}$	η	-	91.5	-	%

Note 1 - $T_A = 25\text{ }^{\circ}C$, airflow rate = 400 LFM, $V_{in} = 48Vdc$, nominal V_{out} unless otherwise noted.

Output Specifications

Table 3. Output Specifications:

Parameter	Conditions ¹	Symbol	Min	Typ	Max	Unit
Factory Set Voltage	$V_{IN,DC} = 48V_{DC}$ $I_O = I_{O,max}$	V_O	3.25	3.3	3.35	Vdc
Total Regulation	Inclusive of line, load temperature change, warm-up drift	V_O	3.2	3.3	3.4	Vdc
Output Voltage Line Regulation	All	$\pm \%V_O$	-	0.15	-	%
		$\pm V_O$	-	5	-	mV
Output Voltage Load Regulation	All	$\pm \%V_O$	-	0.15	-	%
		$\pm V_O$	-	5	-	mV
Output Voltage Temperature Regulation	All	$\%V_O$	-	-	0.02	%/°C
Output Voltage Trim Range	All	$\%V_O$	80	-	110	%
Output Ripple, pk-pk	Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth	V_O	-	50	-	mV _{PK-PK}
Output Current	All	I_O	0	-	23	A
Output DC current-limit inception ²	All	I_O	26.5	-	36.8	A
V_O Load Capacitance ³	All	C_O	220	-	10000	uF

Note 1 - $T_a = 25^\circ\text{C}$, airflow rate = 400 LFM, $V_{in} = 48\text{Vdc}$, nominal V_{out} unless otherwise noted.

Note 2 - Hiccup: auto-restart when over-current condition is removed.

Note 3 - High frequency and low ESR is recommended.

Output Specifications

Table 3. Output Specifications, con't:

Parameter		Conditions ¹	Symbol	Min	Typ	Max	Unit
V _O Dynamic Response	Peak Deviation Settling Time	25%~50%~75% 25% load change slew rate = 0.1A/us	$\pm V_O$ T _s	- -	50 50	- -	mV uSec
	Peak Deviation Settling Time	50%~75%~25% 25% load change slew rate = 1A/us	$\pm V_O$ T _s	- -	120 100	- -	mV uSec
Turn-on transient	Rise time	I _O = I _{O,max}	T _{rise}	-	25	-	mS
	Turn-on delay time	I _O = I _{O,max}	T _{turn-on}	-	5	-	mS
	Output voltage overshoot	I _O = 0	%V _O	-	-	5	%
Switching frequency		All	f _{sw}	-	350	-	KHz
Remote ON/OFF control (positive logic)	Off-state voltage	All		-0.3	-	1.2	V
	On-state voltage	All		3.5	-	12	V
Remote ON/OFF control (negative logic)	Off-state voltage	All		3.5	-	12	V
	On-state voltage	All		-0.3	-	1.2	V
Output voltage trim range		All	%V _O	80		110	%
Output over-voltage protection ⁴		All	V _O	3.9	-	5	V
Output over-temperature protection ⁵		All	T	-	120	-	°C
Over-temperature hysteresis		All	T	-	10	-	°C
+ Sense		All	%V _O	-	-	5	%
- Sense		All	%V _O	-	-	5	%
MTBF		Telcordia SR-332- 2006; 80% load, 300LFM, 40 °C T _A		-	2.0	-	10 ⁶ h

Note 4 - Hiccup: auto-restart when over-voltage condition is removed.

Note 5 - Auto recovery. See Figure 10, Figure 11 for the over-temperature protection (OTP) test point.

AVD75B-48S3V3 Performance Curves

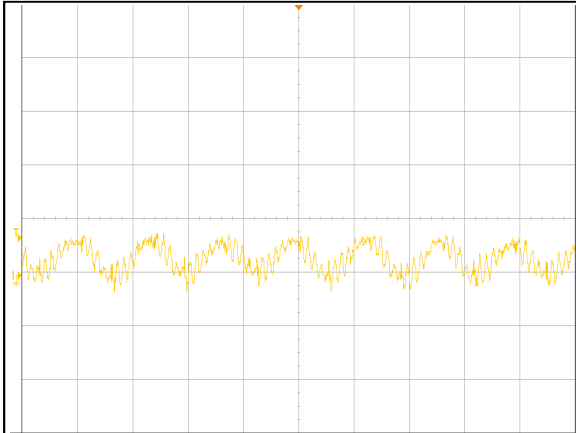


Figure 1: AVD75B-48S3V3 Input Reflected Ripple Current Waveform
Ch 1: Iin (2uS/div, 10mA/div)

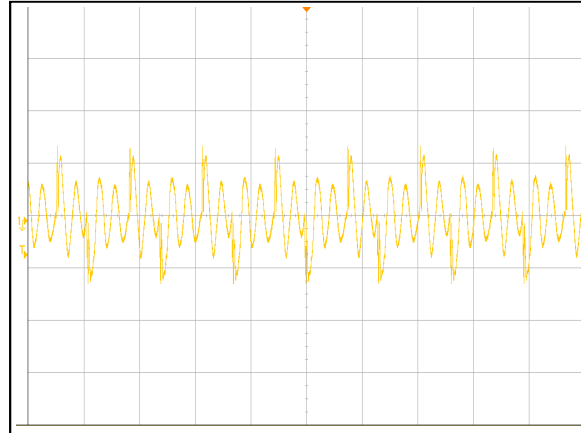


Figure 2: AVD75B-48S3V3 Ripple and Noise Measurement
Ch 1: Vo (2us/div, 20mV/div)

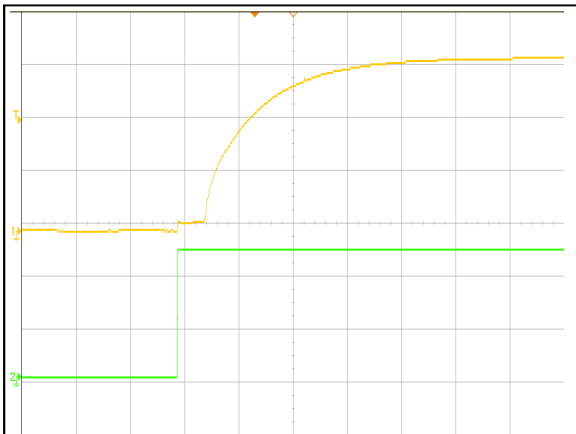


Figure 3: AVD75B-48S3V3 Turn On Characteristic (10mS/div)
Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

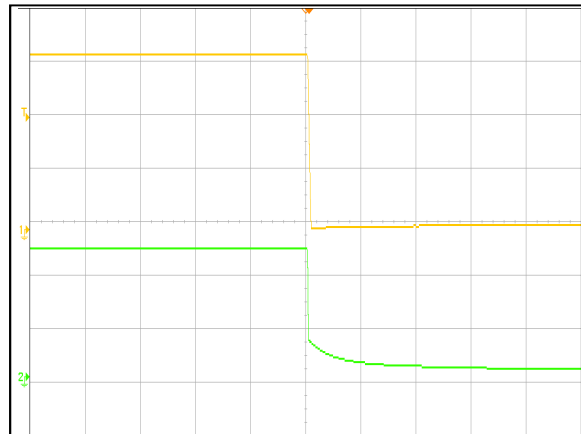


Figure 4: AVD75B-48S3V3 Turn Off Characteristic (5mS/div)
Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

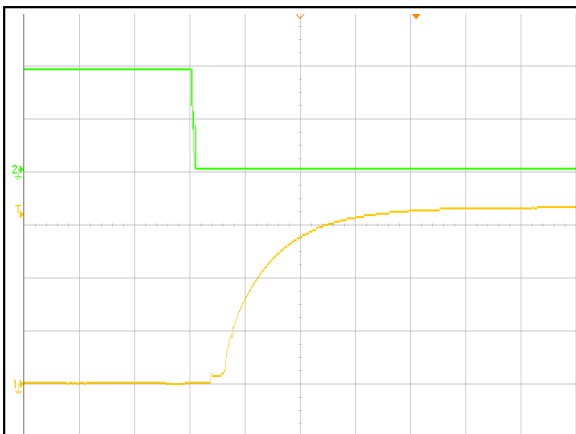


Figure 5: AVD75B-48S3V3 Remote ON Waveform (10mS/div)
Ch 1: Vo (1V/div) Ch 2: Remote ON (2V/div)

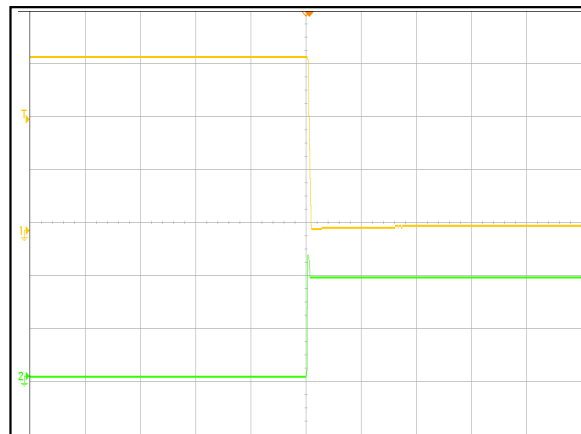


Figure 6: AVD75B-48S3V3 Remote OFF Waveform (5mS/div)
Ch 1: Vo (1V/div) CH 2: Remote OFF (2V/div)

AVD75B-48S3V3 Performance Curves

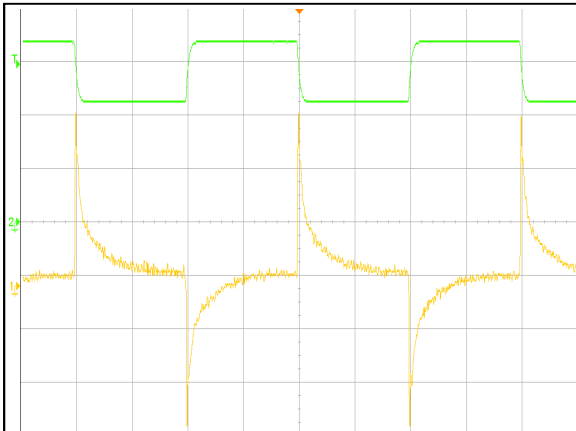


Figure 7: AVD75B-48S3V3 Transient Response (2mS/div)
0.1A/us slew rate
Ch 1: Vo (10mV/div) Ch 2: Io (5A/div)

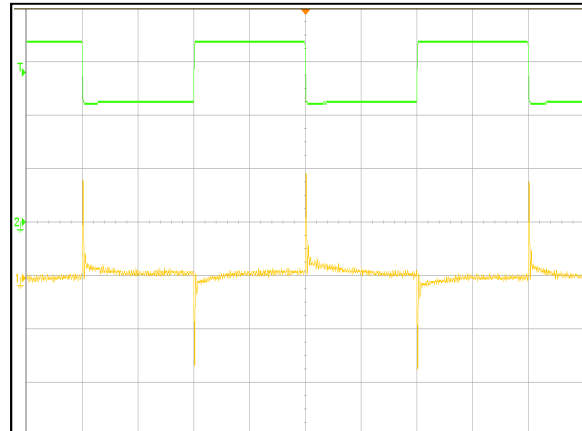


Figure 8: AVD75B-48S3V3 Transient Response (2mS/div)
1A/us slew rate
Ch 1: Vo (10mV/div) Ch 2: Io (5A/div)

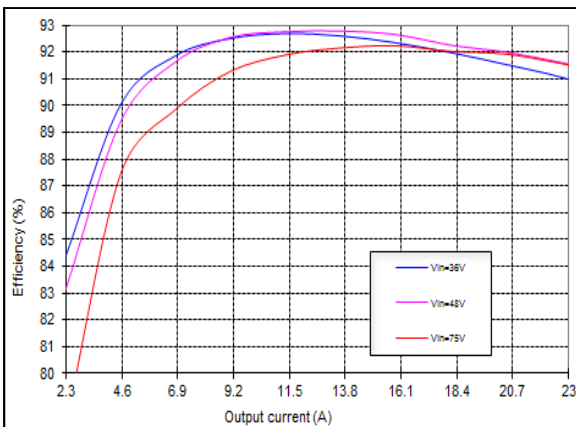


Figure 9: AVD75B-48S3V3 Efficiency Curves @ 25 degC
Loading: Io = 10% increment to 23A

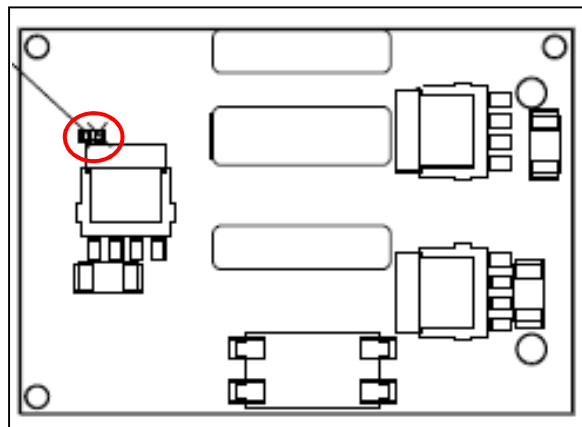


Figure 10: AVD75B-48S3V3 OTP test point (Open-frame module)


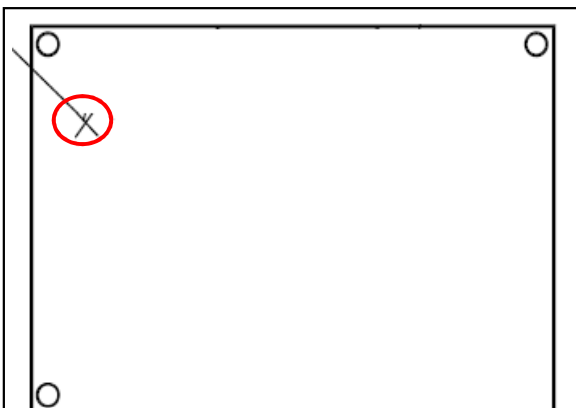


Figure 11: AVD75B-48S3V3 OTP test point (Module with baseplate)

Mechanical Specifications

Mechanical Outlines – Baseplate Module

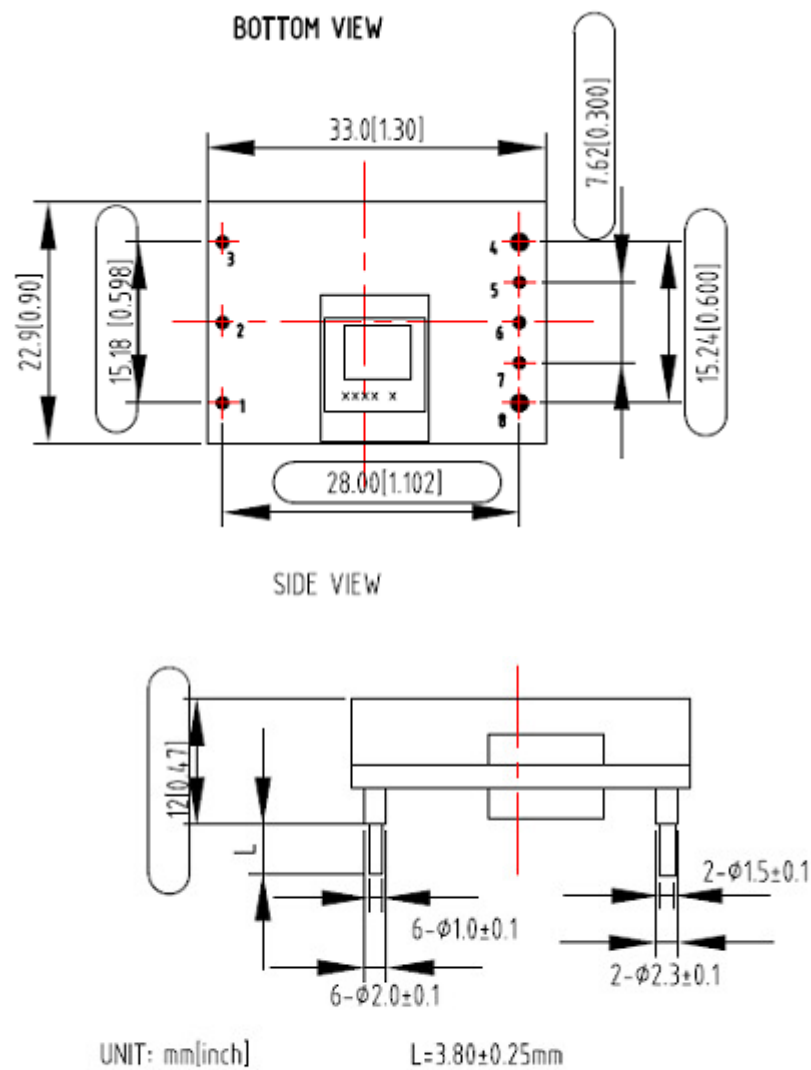

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]


X.XXmm±0.25mm[X.XXX in.±0.01in.]

Notes: Dimensions within the box are critical dimensions.

Figure 12 Baseplate module mechanical diagram

Mechanical Specifications

Mechanical Outlines – Open-frame Module

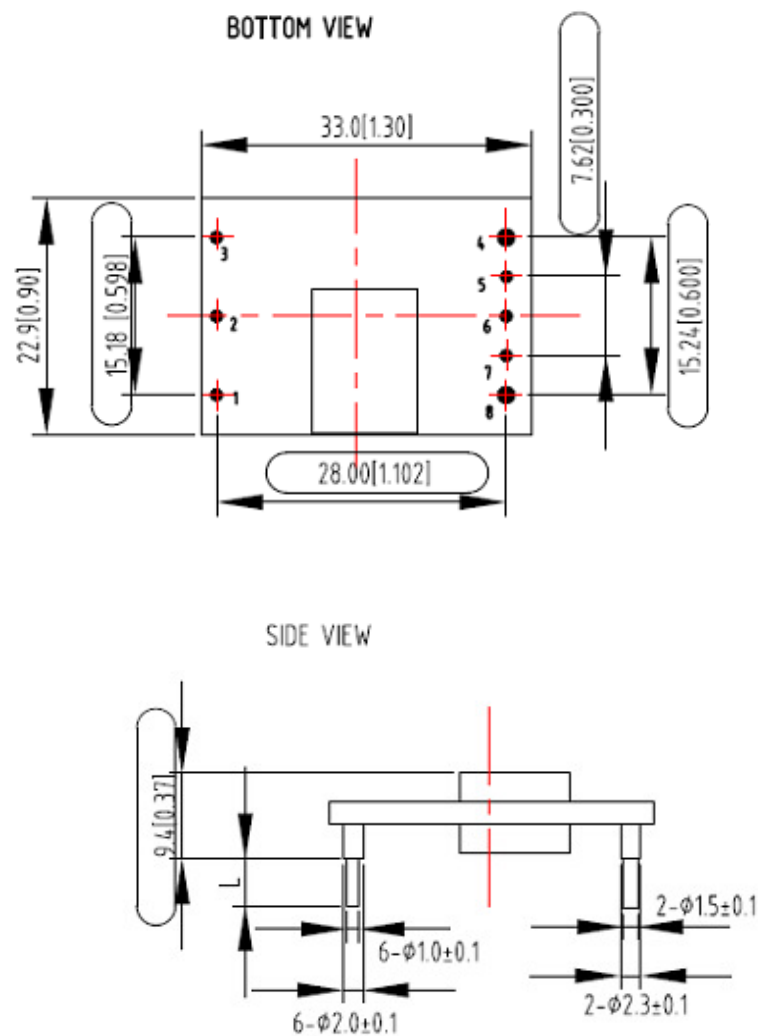

UNIT: mm[inch]

L=3.80±0.25mm

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]


X.XXmm±0.25mm[X.XXX in.±0.01in.]

Notes: Dimensions within the box are critical dimensions.

Figure 13 Open frame module mechanical diagram

Mechanical Specifications

Mechanical Outlines – Surface mounted module mechanical diagram

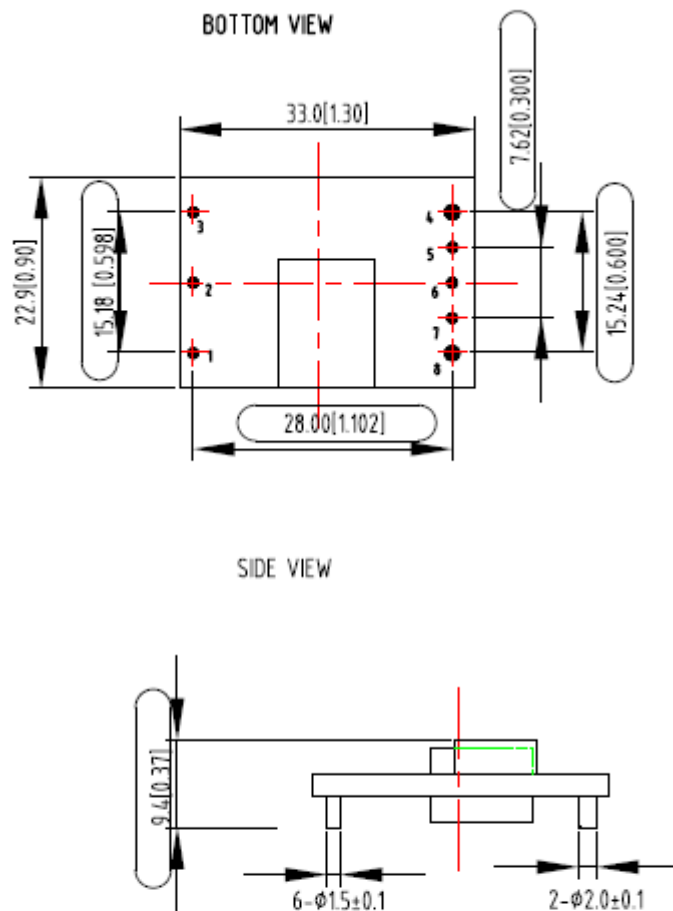

UNIT: mm[inch]

TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]

X.XXmm±0.25mm[X.XXX in.±0.01in.]

Notes: Dimensions within the box are critical dimensions.

Figure 14 Surface mounted module mechanical diagram

Pin Length Option

Device code suffix	L
-4	4.8mm $\pm$ 0.25mm
-6	3.8mm $\pm$ 0.25 mm
-8	2.8mm $\pm$ 0.25 mm
None	5.8mm $\pm$ 0.25 mm

Pin Designations

Pin No	Name	Function
1	Vin+	Positive input terminal
2	Remote ON/OFF	ON/OFF control terminal
3	Vin-	Negative input terminal
4	Vo-	Negative output terminal
5	Sense-	Negative remote sense
6	Trim	Output voltage trim
7	Sense+	Positive remote sense
8	Vo+	Positive output terminal

Environmental Specifications

EMC Immunity

AVD75B-48S3V3 power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications:

Document	Description	Criteria
EN55032, Class A Limits	Conducted and Radiated EMI Limits. DC input port	/
IEC/EN 61000-4-2, Level 3	Electromagnetic Compatibility (EMC) - Testing and measurement techniques - Electrostatic discharge immunity test. Enclosure Port	B
IEC/EN 61000-4-6, Level 2	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Continuous Conducted Interference. DC input port	A
IEC/EN 61000-4-4, Level3	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Electrical Fast Transient. DC input port.	B
IEC/EN 61000-4-5	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Immunity to surges - 600V common mode and 600V differential mode for DC ports	B
EN61000-4-29	Electromagnetic Compatibility (EMC) - Testing and measurement techniques, Voltage Dips and short interruptions and voltage variations. DC input port	B

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically. For Dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

Criterion C: Temporary loss of output, the correction of which requires operator intervention.

Criterion D: Loss of output which is not recoverable, owing to damage to hardware

Safety Certifications

The AVD75B-48S3V3 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AVD75B-48S3V3 power supply system

Document	File #	Description
UL/CSA 60950		US and Canada Requirements
EN60950		European Requirements
IEC60950		International Requirements
CE		CE Marking

Operating Temperature

The AVD75B-48S3V3 power supply will start and operate within stated specifications at an ambient temperature from -40 °C to 85 °C under all load conditions. The storage temperature is -55 °C to 125 °C.

Thermal Considerations – Open-frame module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling of the DC/DC converter can be verified by measuring the temperature at the test point as shown in the Figure 15. The temperature at this point should not exceed the max values in the table 6.


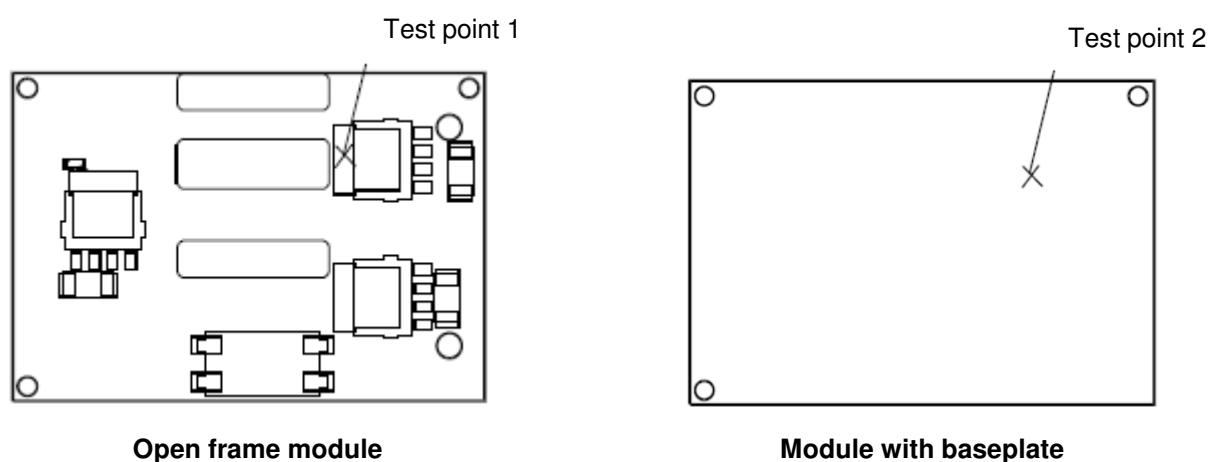


Figure 15 Module temperature test point


Table 6. Temperature limit of the test point

Test Point	Temperature Limit
Test point 1	130 °C
Test point 2	120 °C

For a typical application, figure 16 shows the derating of output current vs. ambient air temperature at different air velocity.

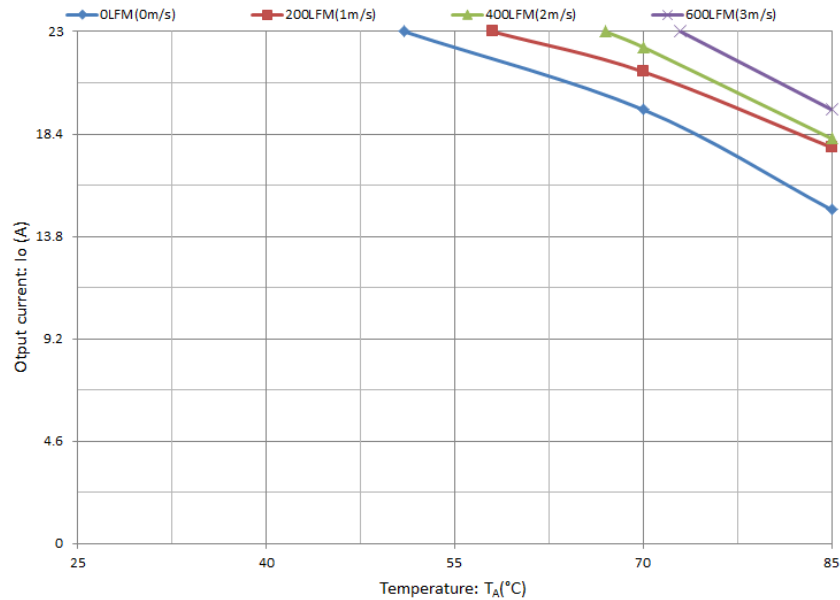

AVD75B-48S3V3-6L and AVD75B-48S3V3TL

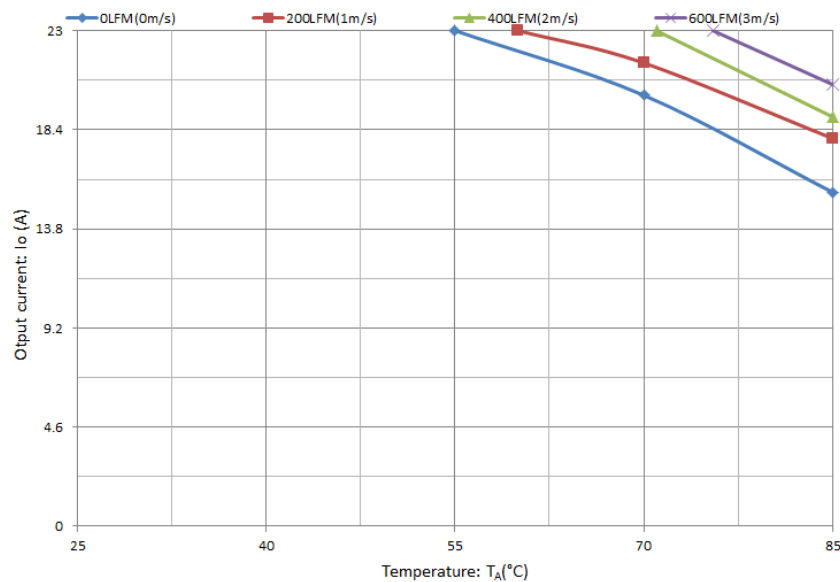

AVD75B-48S3V3B-6L

Figure 16 Output power derating, 48Vin, air flowing across the converter (from Vin- to Vin+)

Qualification Testing

Parameter	Unit (pcs)	Test condition
Halt test	4-5	$T_{a,min} - 30^{\circ}\text{C}$ to $T_{a,max} + 25^{\circ}\text{C}$, 10°C step, V_{in} = min to max, 0 ~ 100% load
Vibration	3	Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: $1.0\text{m}^2/\text{s}^3$, -3db/oct, axes of vibration: X/Y/Z. Time: 30min/axes
Mechanical Shock	3	30g, 6ms, 3axes, 6directions, 3time/direction
Thermal Shock	3	-55°C to 125°C , unit temperature 20 cycles
Thermal Cycling	3	-40°C to 85°C , temperature change rate: $1^{\circ}\text{C}/\text{min}$, cycles: 2cycles
Humidity	3	40°C , 95%RH, 48h
Solder Ability	15	IPC J-STD-002C-2007

Application Notes

Typical Application

Below is the typical application of the AVD75B-48S3V3 power supply.

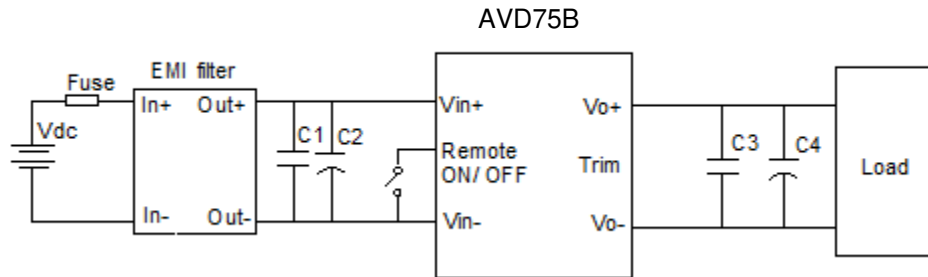


Figure 17 Typical application

C1: 100 μ F/100V electrolytic capacitor; P/N: UPM2A101MPD (Nichicon) or equivalent caps

C2, C3: 1 μ F/100V X7R ceramic capacitor, P/N: C3216X7R2A105KT0L0S (TDK) or equivalent caps

C4: 470 μ F electrolytic capacitor, P/N: UPM1E471MHD (Nichicon) or equivalent caps


Fuse: External fast blow fuse with a rating of 5A. The recommended fuse model is 0453005.MR from LITTLEFUSE.

EMI filter: see Figure 22.


Remote ON/OFF

Negative remote ON/OFF logic is available in AVD75B-48S3V3. The logic is CMOS and TTL compatible.

The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in table 3 to ensure proper operation. The external Remote ON/OFF circuit is highly recommended as shown in figure 18.

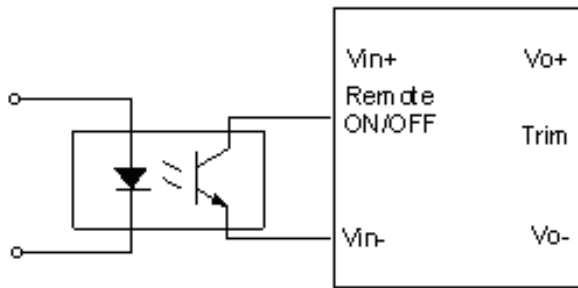

Isolated remote ON/OFF circuit

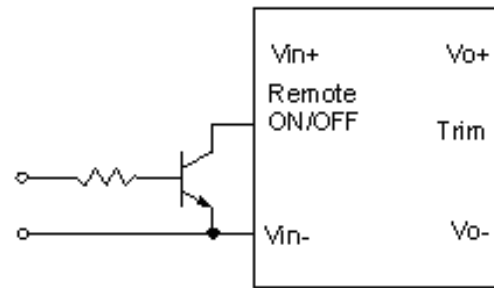

Non-isolated remote ON/OFF circuit

Figure 18 External Remote ON/OFF circuit

Trim Characteristics

Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage. While connecting it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj-down} = \frac{510}{\Delta} - 10.2(K\Omega)$$

$$R_{adj-up} = \frac{5.1 \times V_{nom} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{510}{\Delta} - 10.2(K\Omega)$$

Δ : Output error rate against nominal output voltage.

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}}$$

V_{nom} : Nominal output voltage.

For example, to get 3.63V output, the trimming resistor is

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}} = \frac{100 \times (3.63 - 3.3)}{3.3} = 10$$

$$R_{adj-up} = \frac{5.1 \times 3.3 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 = 89.9(K\Omega)$$

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

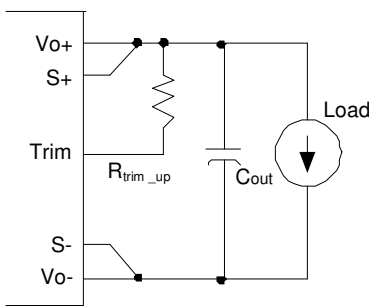


Figure 19 Trim up

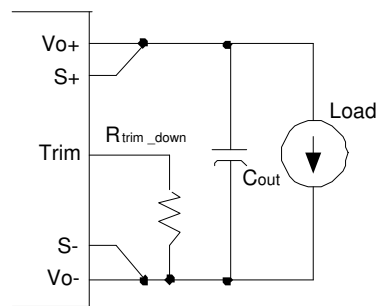


Figure 20 Trim down

For AVD75B-48S3V3, if the sense compensate function is not necessary, connect S+ to Vo+ and S- to Vo- directly.

Input Ripple & Output Ripple & Noise Test Configuration

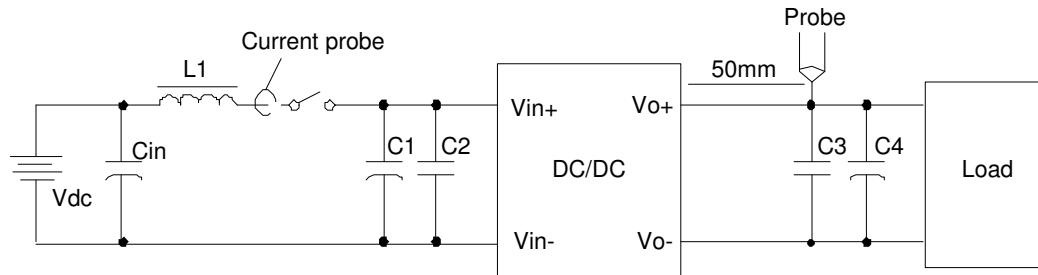


Figure 21 Input ripple & output ripple & noise test configuration

Vdc: DC power supply


L1: 12uH

Cin: 220uF/100V typical

C1 ~ C4: See Figure 17

Note - Using a coaxial cable with series 50ohm resistor and 0.68uF ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended.

EMC Test configuration

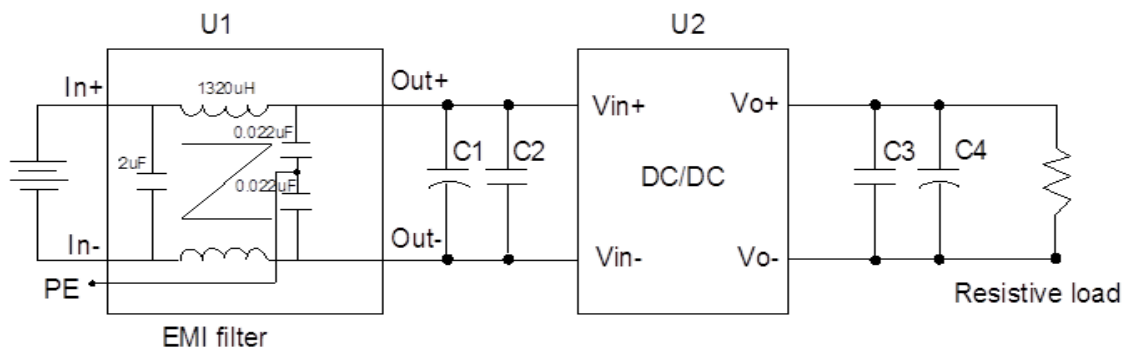

U1: Input EMC filter

U2: Module to test, AVD75B-48S3V3

C1 ~ C4: See Figure 17

Figure 22 EMC Test configuration

Soldering

The product is intended for standard manual or wave soldering.

	Product Requirement	Product Name
R6	Wave soldering	AVD75B-48S3V3B-6L AVD75B-48S3V3-6L

When wave soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter. Cleaning of solder joint can be performed with cleaning solvent IPA or simulative.

The below products are intended for standard reflow soldering.

	Product Requirement	Product Name
R6	Reflow soldering	AVD75B-48S3V3-6L AVD75B-48S3V3TL

When reflow soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 10s.

Package Information

Package type

Moisture sensitivity level 3, moisture barrier bags.

Minimal package QTY

192 pcs.

Package disassembly


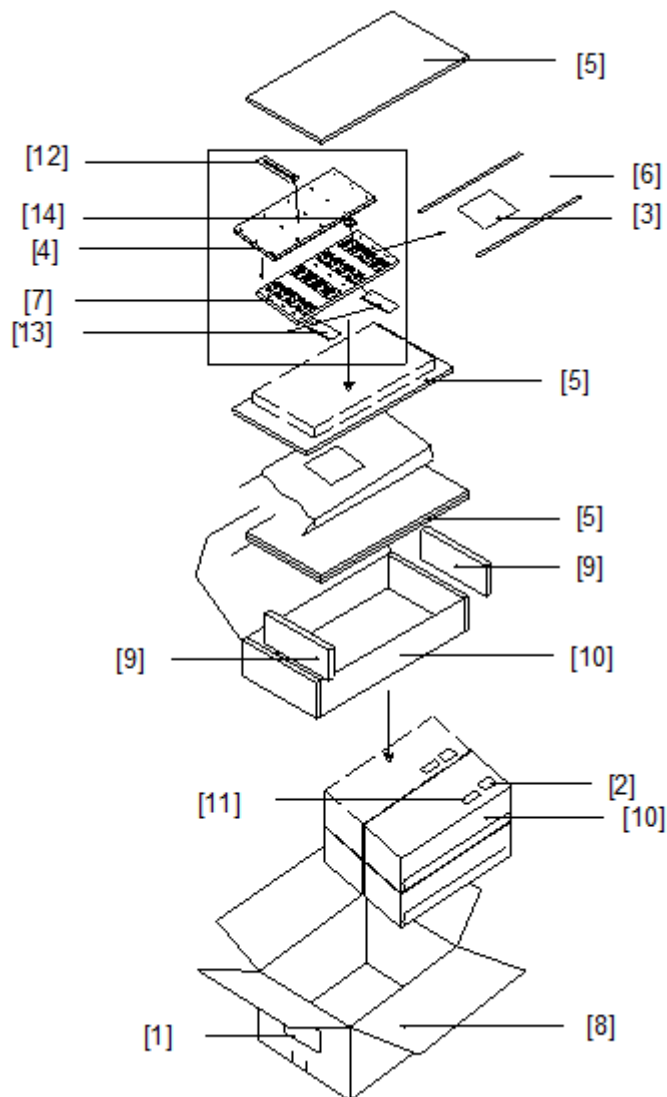


Figure 23 Package disassembly

Table 7. Assemblies description

No.	Description
1	Shipping label
2	Moistureproof identification label
3	Moistureproof caution label
4	Tray cover
5	Anti-static PE foam 1
6	Moisture barrier bag
7	Tray
8	Shipping carton
9	Anti-static PE foam 2
10	Inner box
11	Model barcode label
12	Humidity indicating card
13	Desiccant
14	Model

Package tray information

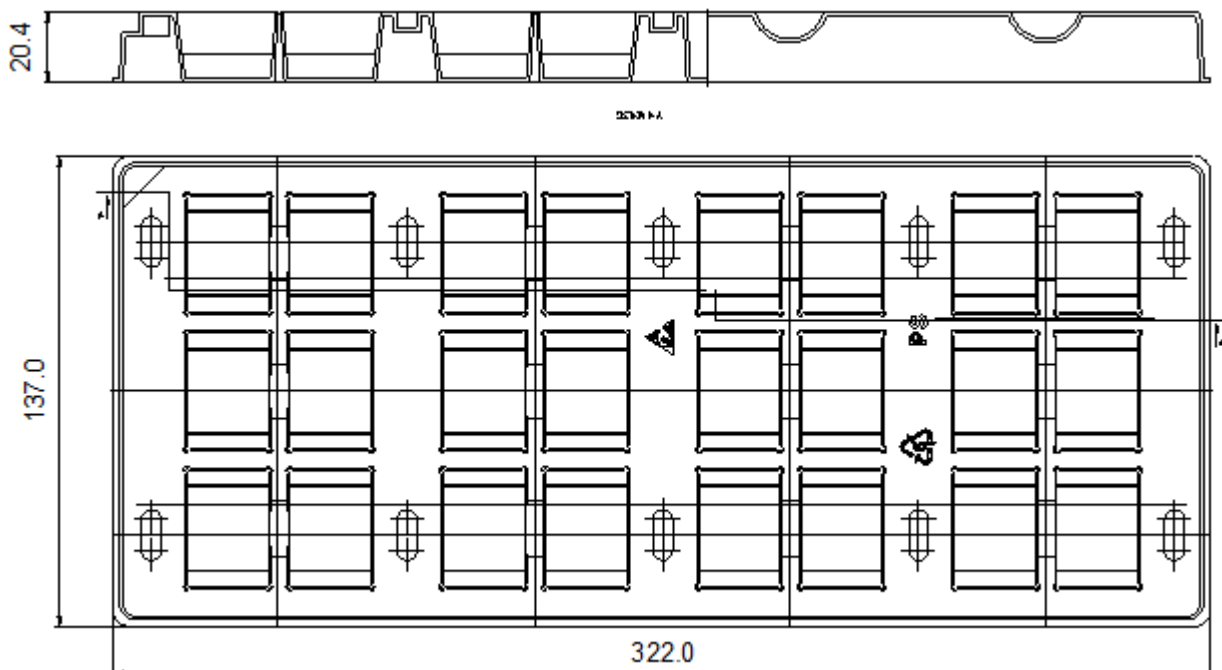

Hazardous Substances Announcement (RoHS of China R6)

Parts	Hazardous Substances					
	Pb	Hg	Cd	Cr ⁶⁺	PBB	PBDE
AVD75B-48S3V3B-6L	x	x	x	x	x	x
AVD75B-48S3V3-6L	x	x	x	x	x	x
AVD75B-48S3V3TL	x	x	x	x	x	x
x: Means the content of the hazardous substances in all the average quality materials of the part is within the limits specified in SJ/T-11363-2006 √: Means the content of the hazardous substances in at least one of the average quality materials of the part is outside the limits specified in SJ/T11363-2006 Artesyn Embedded Technologies has been committed to the design and manufacturing of environment-friendly products. It will reduce and eventually eliminate the hazardous substances in the products through unremitting efforts in research. However, limited by the current technical level, the following parts still contain hazardous substances due to the lack of reliable substitute or mature solution: 1. Solders (including high-temperature solder in parts) contain plumbum. 2. Glass of electric parts contains plumbum. 3. Copper alloy of pins contains plumbum.						

Record of Revision and Changes

Issue	Date	Description	Originators
1.0	08.08.2017	First Issue	X.Sun

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
© 2014 All rights reserved.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com